


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

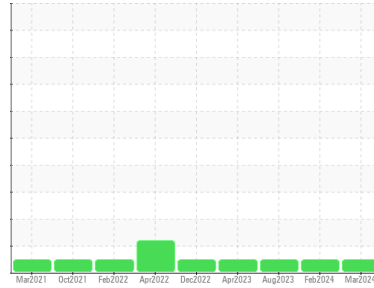

Machine Id  
**DR188**

Component  
**Hydraulic System**

Fluid  
**PETRO CANADA ENVIRON MV 46 (--- LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.  
NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

### Wear

All component wear rates are normal.

### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

| method        | limit/base  | current            | history1    | history2    |
|---------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | <b>PC0077070</b>   | PC0080532   | PC0078521   |
| Sample Date   | Client Info | <b>11 Mar 2024</b> | 09 Feb 2024 | 14 Aug 2023 |
| Machine Age   | hrs         | <b>7904</b>        | 7614        | 6680        |
| Oil Age       | hrs         | <b>0</b>           | 0           | 0           |
| Oil Changed   | Client Info | <b>Changed</b>     | Changed     | Not Changed |
| Sample Status |             | <b>NORMAL</b>      | NORMAL      | NORMAL      |

## CONTAMINATION

| method | limit/base     | current    | history1 | history2 |
|--------|----------------|------------|----------|----------|
| Water  | WC Method >0.1 | <b>NEG</b> | NEG      | NEG      |

## WEAR METALS

| method    | limit/base            | current      | history1 | history2 |
|-----------|-----------------------|--------------|----------|----------|
| Iron      | ppm ASTM D5185(m) >20 | <b>3</b>     | 3        | 3        |
| Chromium  | ppm ASTM D5185(m) >10 | <b>0</b>     | 0        | 0        |
| Nickel    | ppm ASTM D5185(m) >10 | <b>&lt;1</b> | <1       | <1       |
| Titanium  | ppm ASTM D5185(m)     | <b>0</b>     | 0        | 0        |
| Silver    | ppm ASTM D5185(m)     | <b>0</b>     | 0        | 0        |
| Aluminum  | ppm ASTM D5185(m) >10 | <b>&lt;1</b> | <1       | <1       |
| Lead      | ppm ASTM D5185(m) >10 | <b>2</b>     | 2        | 2        |
| Copper    | ppm ASTM D5185(m) >75 | <b>&lt;1</b> | <1       | <1       |
| Tin       | ppm ASTM D5185(m) >10 | <b>0</b>     | 0        | 0        |
| Antimony  | ppm ASTM D5185(m)     | <b>0</b>     | 0        | 0        |
| Vanadium  | ppm ASTM D5185(m)     | <b>0</b>     | 0        | 0        |
| Beryllium | ppm ASTM D5185(m)     | <b>0</b>     | 0        | 0        |
| Cadmium   | ppm ASTM D5185(m)     | <b>0</b>     | 0        | 0        |

## ADDITIVES

| method     | limit/base             | current      | history1 | history2 |
|------------|------------------------|--------------|----------|----------|
| Boron      | ppm ASTM D5185(m) 0    | <b>&lt;1</b> | <1       | <1       |
| Barium     | ppm ASTM D5185(m) 0    | <b>0</b>     | 0        | 0        |
| Molybdenum | ppm ASTM D5185(m) 0    | <b>0</b>     | 0        | 0        |
| Manganese  | ppm ASTM D5185(m) 0    | <b>0</b>     | 0        | 0        |
| Magnesium  | ppm ASTM D5185(m) 0    | <b>1</b>     | 1        | 1        |
| Calcium    | ppm ASTM D5185(m) 0    | <b>5</b>     | 4        | 5        |
| Phosphorus | ppm ASTM D5185(m) 650  | <b>369</b>   | 358      | 372      |
| Zinc       | ppm ASTM D5185(m) 0    | <b>22</b>    | 21       | 24       |
| Sulfur     | ppm ASTM D5185(m) 1420 | <b>1736</b>  | 1692     | 1660     |
| Lithium    | ppm ASTM D5185(m)      | <b>&lt;1</b> | <1       | <1       |






## CONTAMINANTS

| method    | limit/base            | current  | history1 | history2 |
|-----------|-----------------------|----------|----------|----------|
| Silicon   | ppm ASTM D5185(m) >20 | <b>2</b> | 2        | 2        |
| Sodium    | ppm ASTM D5185(m)     | <b>5</b> | 5        | 5        |
| Potassium | ppm ASTM D5185(m) >20 | <b>1</b> | 2        | <1       |

## FLUID CLEANLINESS

| method          | limit/base             | current         | history1 | history2 |
|-----------------|------------------------|-----------------|----------|----------|
| Particles >4µm  | ASTM D7647 >5000       | <b>189</b>      | 281      | ---      |
| Particles >6µm  | ASTM D7647 >1300       | <b>57</b>       | 122      | ---      |
| Particles >14µm | ASTM D7647 >160        | <b>6</b>        | 16       | ---      |
| Particles >21µm | ASTM D7647 >40         | <b>2</b>        | 4        | ---      |
| Particles >38µm | ASTM D7647 >10         | <b>1</b>        | 1        | ---      |
| Particles >71µm | ASTM D7647 >3          | <b>0</b>        | 0        | ---      |
| Oil Cleanliness | ISO 4406 (c) >19/17/14 | <b>15/13/10</b> | 15/14/11 | ---      |

# OIL ANALYSIS REPORT

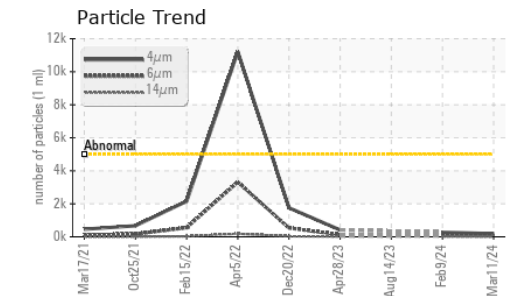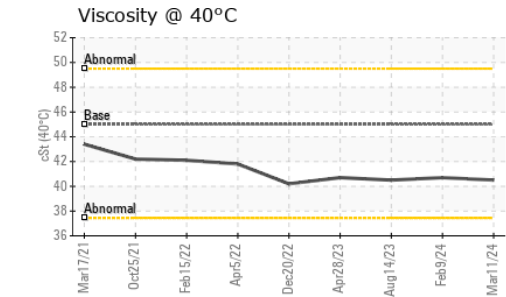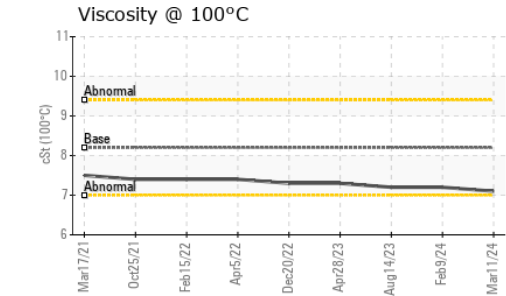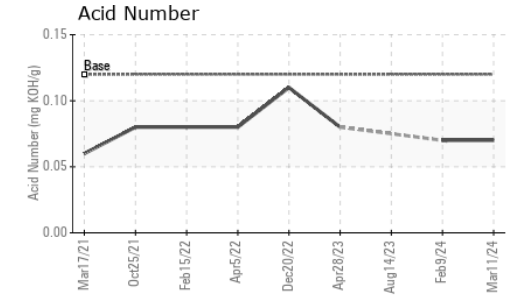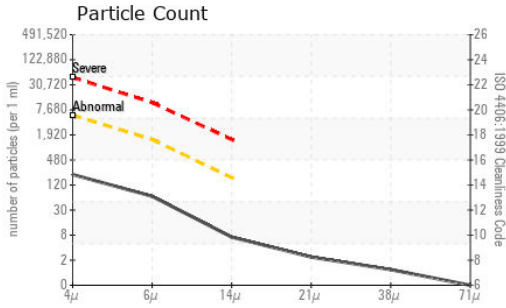

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0077070  
**Lab Number** : 02622693  
**Unique Number** : 5747812  
**Test Package** : IND 2 ( Additional Tests: KV100, VI )

Green Infrastructure and Partners Inc (GIPI) - 286 - Shoring & Foundations  
 151 Ram Forest Rd,  
 Stouffville, ON  
 CA L4A 2G8  
 Contact: Shannon Abbott  
 sabbott@gipi.com  
 T: (905)750-5900  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

| FLUID DEGRADATION |          | method     | limit/base | current     | history1 | history2 |
|-------------------|----------|------------|------------|-------------|----------|----------|
| Acid Number (AN)  | mg KOH/g | ASTM D974* | 0.12       | <b>0.07</b> | 0.07     | ---      |

| VISUAL           |        | method  | limit/base | current      | history1 | history2 |
|------------------|--------|---------|------------|--------------|----------|----------|
| White Metal      | scalar | Visual* | NONE       | <b>NONE</b>  | NONE     | NONE     |
| Yellow Metal     | scalar | Visual* | NONE       | <b>NONE</b>  | NONE     | NONE     |
| Precipitate      | scalar | Visual* | NONE       | <b>NONE</b>  | NONE     | NONE     |
| Silt             | scalar | Visual* | NONE       | <b>NONE</b>  | NONE     | NONE     |
| Debris           | scalar | Visual* | NONE       | <b>NONE</b>  | NONE     | NONE     |
| Sand/Dirt        | scalar | Visual* | NONE       | <b>NONE</b>  | NONE     | NONE     |
| Appearance       | scalar | Visual* | NORML      | <b>NORML</b> | NORML    | NORML    |
| Odor             | scalar | Visual* | NORML      | <b>NORML</b> | NORML    | NORML    |
| Emulsified Water | scalar | Visual* | >0.1       | <b>NEG</b>   | NEG      | NEG      |
| Free Water       | scalar | Visual* |            | <b>NEG</b>   | NEG      | NEG      |

| FLUID PROPERTIES     |       | method        | limit/base | current     | history1 | history2 |
|----------------------|-------|---------------|------------|-------------|----------|----------|
| Visc @ 40°C          | cSt   | ASTM D7279(m) | 45.0       | <b>40.5</b> | 40.7     | 40.5     |
| Visc @ 100°C         | cSt   | ASTM D7279(m) | 8.2        | <b>7.1</b>  | 7.2      | 7.2      |
| Viscosity Index (VI) | Scale | ASTM D2270*   | 158        | <b>137</b>  | 140      | 141      |

| SAMPLE IMAGES |  | method | limit/base | current | history1 | history2 |
|---------------|--|--------|------------|---------|----------|----------|
| Color         |  |        |            |         |          |          |
| Bottom        |  |        |            |         |          |          |

