


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

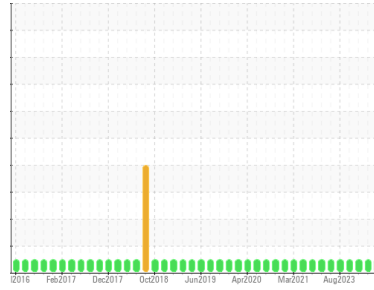

Area  
**Cranes**  
Machine Id  
**Crane - Aft - Hydraulic System (Reservoir) (S/N Sample Tag MA-04001-S4)**  
Component  
**Hydraulic System**  
Fluid  
**PETRO CANADA ATF DEXRON III/MERCON (1050 LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

| method        | limit/base  | current            | history1    | history2    |
|---------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | <b>PC</b>          | PC0076376   | PC          |
| Sample Date   | Client Info | <b>17 Mar 2024</b> | 31 Dec 2023 | 26 Nov 2023 |
| Machine Age   | hrs         | Client Info        | <b>0</b>    | 0           |
| Oil Age       | hrs         | Client Info        | <b>0</b>    | 0           |
| Oil Changed   | Client Info | <b>N/A</b>         | N/A         | N/A         |
| Sample Status |             | <b>NORMAL</b>      | NORMAL      | NORMAL      |

## CONTAMINATION

| method | limit/base      | current    | history1 | history2 |
|--------|-----------------|------------|----------|----------|
| Water  | WC Method >0.05 | <b>NEG</b> | NEG      | NEG      |

## WEAR METALS

| method    | limit/base  | current           | history1     | history2 |
|-----------|-------------|-------------------|--------------|----------|
| PQ        | ASTM D8184* | <b>0</b>          | 0            | 0        |
| Iron      | ppm         | ASTM D5185(m) >20 | <b>1</b>     | 8        |
| Chromium  | ppm         | ASTM D5185(m) >10 | <b>0</b>     | 1        |
| Nickel    | ppm         | ASTM D5185(m) >10 | <b>&lt;1</b> | 0        |
| Titanium  | ppm         | ASTM D5185(m)     | <b>0</b>     | 0        |
| Silver    | ppm         | ASTM D5185(m)     | <b>0</b>     | <1       |
| Aluminum  | ppm         | ASTM D5185(m) >10 | <b>&lt;1</b> | <1       |
| Lead      | ppm         | ASTM D5185(m) >20 | <b>2</b>     | <1       |
| Copper    | ppm         | ASTM D5185(m) >20 | <b>3</b>     | 3        |
| Tin       | ppm         | ASTM D5185(m) >10 | <b>0</b>     | 0        |
| Antimony  | ppm         | ASTM D5185(m)     | <b>0</b>     | 0        |
| Vanadium  | ppm         | ASTM D5185(m)     | <b>0</b>     | 0        |
| Beryllium | ppm         | ASTM D5185(m)     | <b>0</b>     | 0        |
| Cadmium   | ppm         | ASTM D5185(m)     | <b>0</b>     | 0        |






## ADDITIVES

| method     | limit/base | current           | history1     | history2 |
|------------|------------|-------------------|--------------|----------|
| Boron      | ppm        | ASTM D5185(m) 130 | <b>99</b>    | 100      |
| Barium     | ppm        | ASTM D5185(m) 1.0 | <b>0</b>     | 19       |
| Molybdenum | ppm        | ASTM D5185(m) 0.0 | <b>0</b>     | 0        |
| Manganese  | ppm        | ASTM D5185(m)     | <b>0</b>     | 0        |
| Magnesium  | ppm        | ASTM D5185(m) 1.0 | <b>1</b>     | <1       |
| Calcium    | ppm        | ASTM D5185(m) 20  | <b>76</b>    | 45       |
| Phosphorus | ppm        | ASTM D5185(m) 280 | <b>247</b>   | 284      |
| Zinc       | ppm        | ASTM D5185(m) 10  | <b>40</b>    | 62       |
| Sulfur     | ppm        | ASTM D5185(m) 440 | <b>790</b>   | 818      |
| Lithium    | ppm        | ASTM D5185(m)     | <b>&lt;1</b> | <1       |

## CONTAMINANTS

| method    | limit/base | current           | history1     | history2 |
|-----------|------------|-------------------|--------------|----------|
| Silicon   | ppm        | ASTM D5185(m) >15 | <b>3</b>     | 2        |
| Sodium    | ppm        | ASTM D5185(m)     | <b>&lt;1</b> | 5        |
| Potassium | ppm        | ASTM D5185(m) >20 | <b>1</b>     | 1        |

# OIL ANALYSIS REPORT

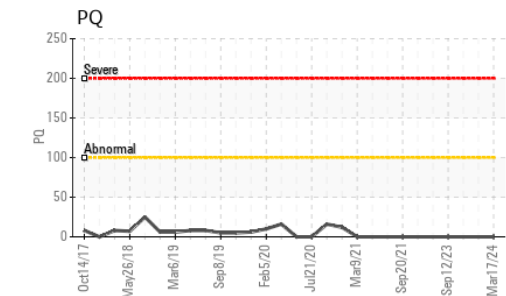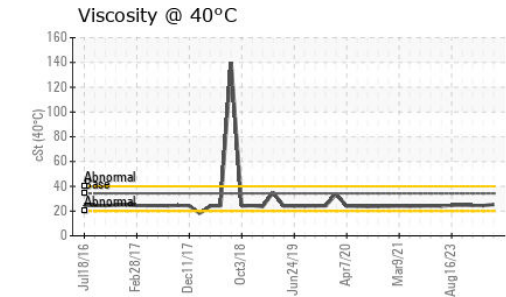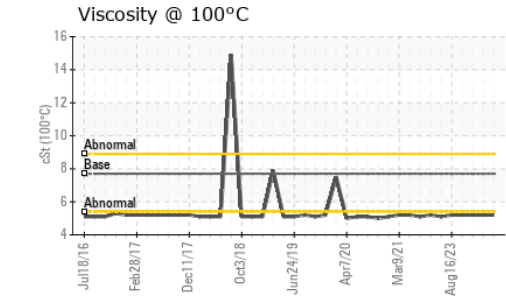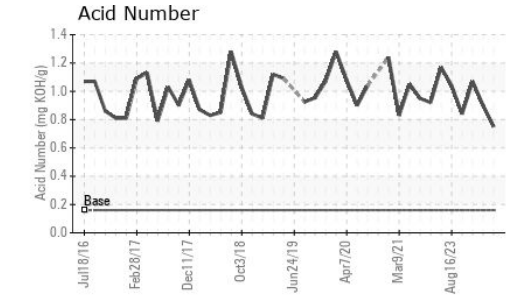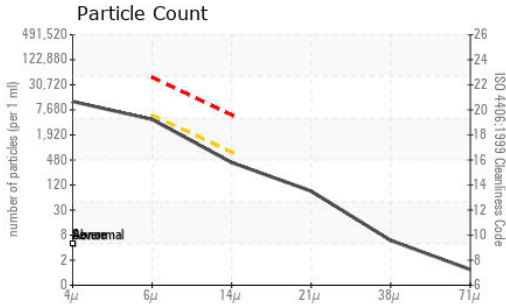

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC  
**Lab Number** : **02622707**  
**Unique Number** : 5747826  
**Test Package** : MAR 2 ( Additional Tests: KV100, PQ, VI )

**Suncor - Terra Nova Projects**  
 Scotia Centre, 235 Water Street  
 St. John's, NL  
 CA A1C 1B6  
 Contact: Josh Hynes  
 joshhynes@suncor.com  
 T: (709)778-3575  
 F: (709)724-2835

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

| FLUID CLEANLINESS |              | method    | limit/base | current         | history1 | history2 |
|-------------------|--------------|-----------|------------|-----------------|----------|----------|
| Particles >4µm    | ASTM D7647   |           |            | <b>10624</b>    | 3976     | 686      |
| Particles >6µm    | ASTM D7647   | >5000     |            | <b>3927</b>     | 1088     | 122      |
| Particles >14µm   | ASTM D7647   | >640      |            | <b>365</b>      | 47       | 15       |
| Particles >21µm   | ASTM D7647   | >160      |            | <b>76</b>       | 8        | 3        |
| Particles >38µm   | ASTM D7647   | >40       |            | <b>5</b>        | 1        | 1        |
| Particles >71µm   | ASTM D7647   | >10       |            | <b>1</b>        | 0        | 1        |
| Oil Cleanliness   | ISO 4406 (c) | >--/19/16 |            | <b>21/19/16</b> | 19/17/13 | 17/14/11 |

| FLUID DEGRADATION |          | method     | limit/base | current     | history1 | history2 |
|-------------------|----------|------------|------------|-------------|----------|----------|
| Acid Number (AN)  | mg KOH/g | ASTM D974* | 0.16       | <b>0.75</b> | 0.90     | 1.07     |

| VISUAL           |        | method  | limit/base | current      | history1 | history2 |
|------------------|--------|---------|------------|--------------|----------|----------|
| White Metal      | scalar | Visual* | NONE       | <b>NONE</b>  | NONE     | NONE     |
| Yellow Metal     | scalar | Visual* | NONE       | <b>NONE</b>  | NONE     | NONE     |
| Precipitate      | scalar | Visual* | NONE       | <b>NONE</b>  | NONE     | NONE     |
| Silt             | scalar | Visual* | NONE       | <b>NONE</b>  | NONE     | NONE     |
| Debris           | scalar | Visual* | NONE       | <b>NONE</b>  | NONE     | VLITE    |
| Sand/Dirt        | scalar | Visual* | NONE       | <b>NONE</b>  | NONE     | NONE     |
| Appearance       | scalar | Visual* | NORML      | <b>NORML</b> | NORML    | NORML    |
| Odor             | scalar | Visual* | NORML      | <b>NORML</b> | NORML    | NORML    |
| Emulsified Water | scalar | Visual* | >0.05      | <b>NEG</b>   | NEG      | NEG      |
| Free Water       | scalar | Visual* |            | <b>NEG</b>   | NEG      | NEG      |

| FLUID PROPERTIES     |       | method        | limit/base | current     | history1 | history2 |
|----------------------|-------|---------------|------------|-------------|----------|----------|
| Visc @ 40°C          | cSt   | ASTM D7279(m) | 34.26      | <b>25.3</b> | 24.4     | 24.5     |
| Visc @ 100°C         | cSt   | ASTM D7279(m) | 7.7        | <b>5.2</b>  | 5.2      | 5.2      |
| Viscosity Index (VI) | Scale | ASTM D2270*   | 210        | <b>141</b>  | 150      | 149      |

| SAMPLE IMAGES |  | method | limit/base | current | history1 | history2 |
|---------------|--|--------|------------|---------|----------|----------|
|---------------|--|--------|------------|---------|----------|----------|

