




OIL ANALYSIS REPORT

Sample Rating Trend

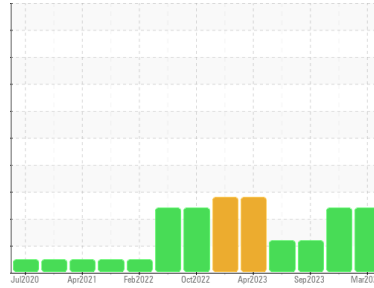

FUEL



Machine Id
426013
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

We advise that you check the fuel injection system. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0102901	GFL0097327	GFL0065880
Sample Date	Client Info		18 Mar 2024	19 Dec 2023	25 Sep 2023
Machine Age	hrs	Client Info	0	0	0
Oil Age	hrs	Client Info	18310	17903	17303
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			SEVERE	SEVERE	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	0.0

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >120	4	5	5
Chromium	ppm	ASTM D5185(m) >20	0	0	0
Nickel	ppm	ASTM D5185(m) >5	<1	<1	0
Titanium	ppm	ASTM D5185(m) >2	0	0	0
Silver	ppm	ASTM D5185(m) >2	0	0	<1
Aluminum	ppm	ASTM D5185(m) >20	3	3	1
Lead	ppm	ASTM D5185(m) >40	<1	<1	2
Copper	ppm	ASTM D5185(m) >330	1	<1	<1
Tin	ppm	ASTM D5185(m) >15	<1	<1	0
Antimony	ppm	ASTM D5185(m)	0	0	0
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 0	113	22	25
Barium	ppm	ASTM D5185(m) 0	0	0	<1
Molybdenum	ppm	ASTM D5185(m) 60	4	39	38
Manganese	ppm	ASTM D5185(m) 0	0	0	0
Magnesium	ppm	ASTM D5185(m) 1010	54	481	480
Calcium	ppm	ASTM D5185(m) 1070	2066	1633	1661
Phosphorus	ppm	ASTM D5185(m) 1150	911	702	705
Zinc	ppm	ASTM D5185(m) 1270	1052	818	839
Sulfur	ppm	ASTM D5185(m) 2060	2881	2033	2019
Lithium	ppm	ASTM D5185(m)	<1	<1	<1

CONTAMINANTS



	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >25	3	4	4
Sodium	ppm	ASTM D5185(m)	3	2	3
Potassium	ppm	ASTM D5185(m) >20	5	<1	12
Fuel	%	ASTM D7593* >3.0	▲ 5.4	▲ 5	▲ 4.1

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844* >4	0	0.1	0
Nitration	Abs/cm	ASTM D7624* >20	8.9	8.7	7.8
Sulfation	Abs./1mm	ASTM D7415* >30	21.5	21.7	22.1



OIL ANALYSIS REPORT







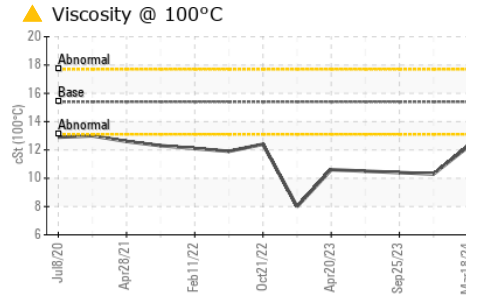
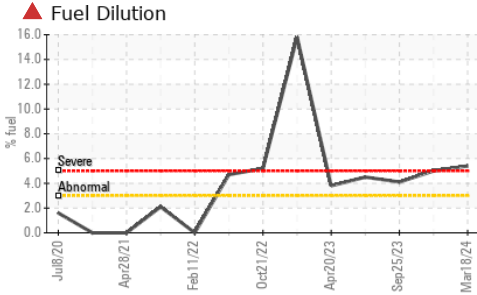


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	17.5	21.1	20.8

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	▲ 12.2	▲ 10.3	▲ 10.4

GRAPHS

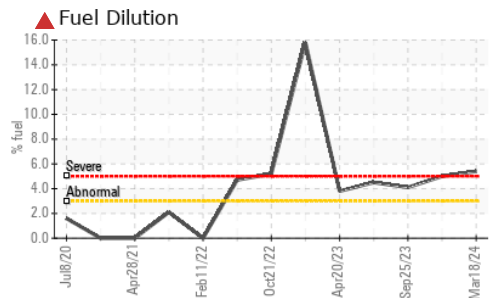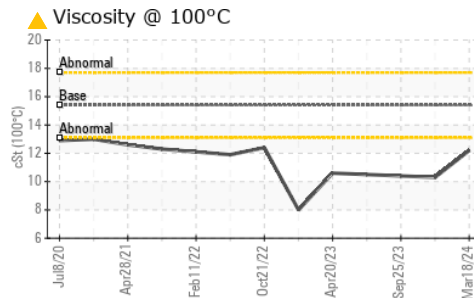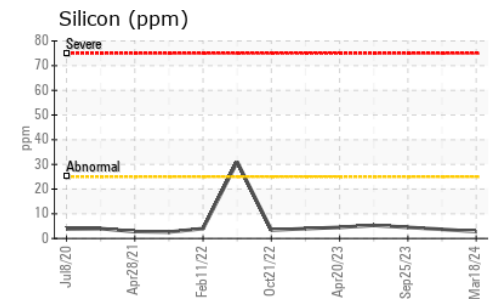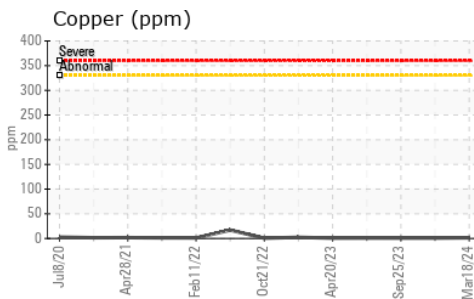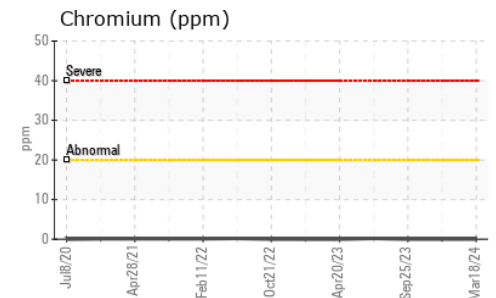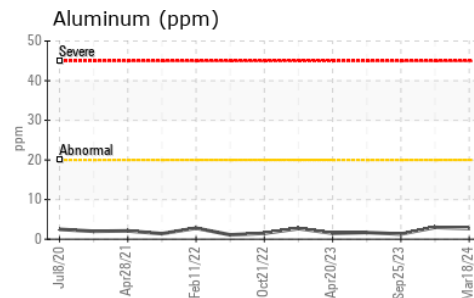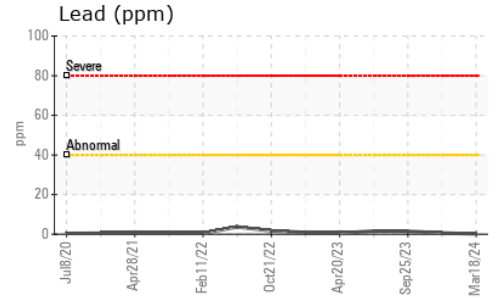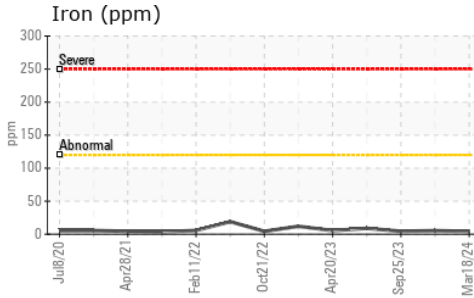

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0102901
Lab Number : 02622941
Unique Number : 5748060
Test Package : MOB 1 (Additional Tests: PercentFuel)

GFL Environmental - 246 - Windsor
 2700 Deziel Dr
 Windsor, ON
 CA N8W 5H8
 Contact: Dave Varga
 dvarga@gflenv.com
 T: (519)944-8009
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.