




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

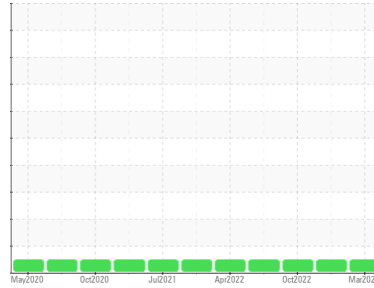

Machine Id  
**426011**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

Additive levels indicate the addition of a different brand, or type of oil. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0102899</b>	GFL0071331	GFL0061939
Sample Date	Client Info		<b>15 Mar 2024</b>	14 Feb 2023	20 Oct 2022
Machine Age	hrs	Client Info	<b>19066</b>	17116	16566
Oil Age	hrs	Client Info	<b>0</b>	0	386
Oil Changed	Client Info		<b>N/A</b>	N/A	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>120	<b>4</b>	6	4
Chromium	ppm	ASTM D5185(m)	>20	<b>0</b>	<1	0
Nickel	ppm	ASTM D5185(m)	>5	<b>1</b>	4	<1
Titanium	ppm	ASTM D5185(m)	>2	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185(m)	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>20	<b>2</b>	2	1
Lead	ppm	ASTM D5185(m)	>40	<b>&lt;1</b>	1	1
Copper	ppm	ASTM D5185(m)	>330	<b>&lt;1</b>	2	<1
Tin	ppm	ASTM D5185(m)	>15	<b>0</b>	<1	<1
Antimony	ppm	ASTM D5185(m)		<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	0	<b>123</b>	2	3
Barium	ppm	ASTM D5185(m)	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	60	<b>6</b>	59	57
Manganese	ppm	ASTM D5185(m)	0	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185(m)	1010	<b>66</b>	955	940
Calcium	ppm	ASTM D5185(m)	1070	<b>2171</b>	1106	1120
Phosphorus	ppm	ASTM D5185(m)	1150	<b>990</b>	1110	1068
Zinc	ppm	ASTM D5185(m)	1270	<b>1134</b>	1196	1162
Sulfur	ppm	ASTM D5185(m)	2060	<b>3124</b>	2719	2716
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

## CONTAMINANTS




	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>25	<b>2</b>	3	2
Sodium	ppm	ASTM D5185(m)		<b>3</b>	2	3
Potassium	ppm	ASTM D5185(m)	>20	<b>8</b>	2	<1
Glycol	%	ASTM D7922*		<b>0.0</b>	NEG	NEG

## INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>4	<b>0.2</b>	0.3	0.1
Nitration	Abs/cm	ASTM D7624*	>20	<b>8.7</b>	9.8	7.7
Sulfation	Abs.1mm	ASTM D7415*	>30	<b>21.4</b>	20.7	19.4



# OIL ANALYSIS REPORT






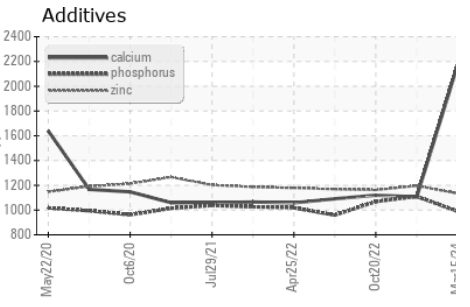
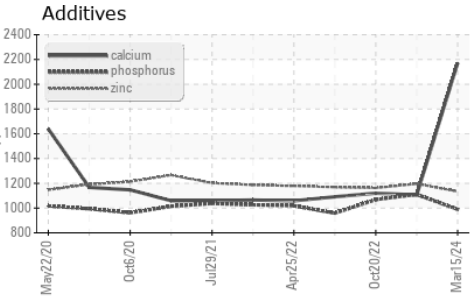
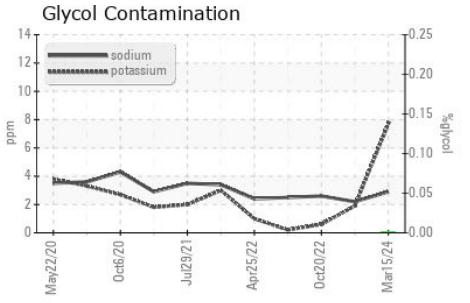


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs./1mm	ASTM D7414*	>25	17.6	16.0	15.3

VISUAL	method	limit/base	current	history1	history2	
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	13.5	13.4	13.9

## GRAPHS

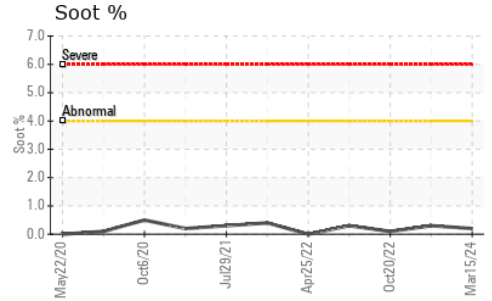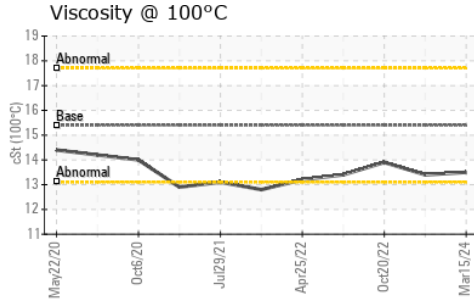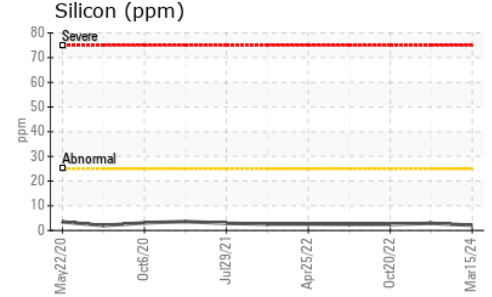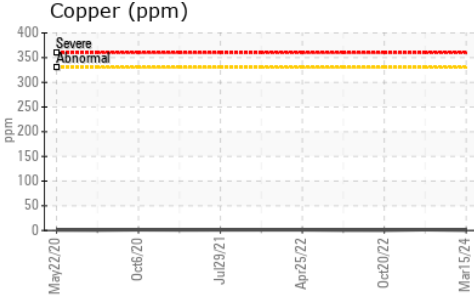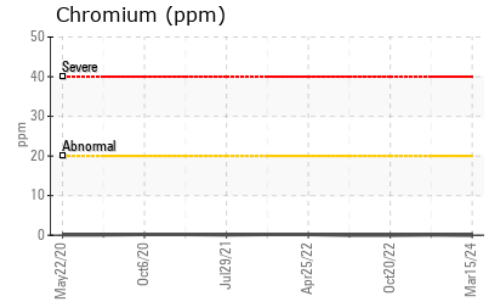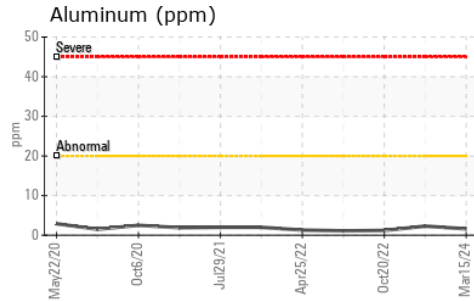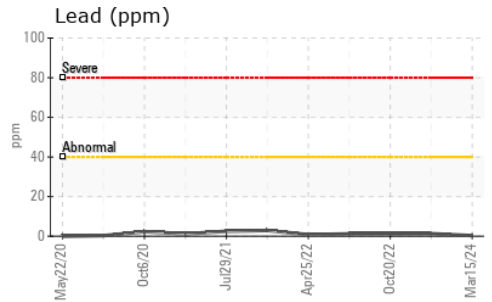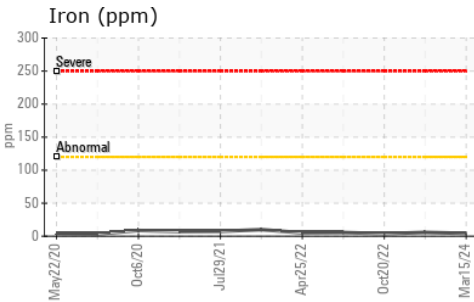

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0102899 **Received** : 19 Mar 2024  
**Lab Number** : 02622944 **Tested** : 19 Mar 2024  
**Unique Number** : 5748063 **Diagnosed** : 19 Mar 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: Glycol )

**GFL Environmental - 246 - Windsor**  
 2700 Deziel Dr  
 Windsor, ON  
 CA N8W 5H8  
 Contact: Dave Varga  
 dvarga@gflenv.com  
 T: (519)944-8009  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.