




OIL ANALYSIS REPORT

Sample Rating Trend

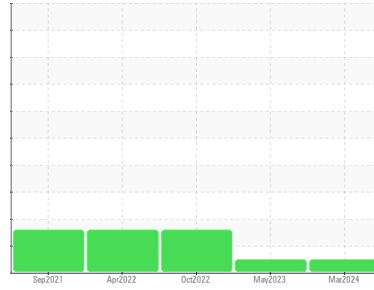

NORMAL



Machine Id
0123
 Component
Gasoline Engine
 Fluid
AC DELCO 0W30 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0090755	GFL0069693	GFL0053243
Sample Date	Client Info		18 Mar 2024	04 May 2023	17 Oct 2022
Machine Age	kms	Client Info	290645	273609	257417
Oil Age	kms	Client Info	7500	7500	7500
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>150	62	26	26
Chromium	ppm	ASTM D5185(m)	>20	2	1	1
Nickel	ppm	ASTM D5185(m)	>5	<1	<1	<1
Titanium	ppm	ASTM D5185(m)		0	<1	1
Silver	ppm	ASTM D5185(m)	>2	0	0	0
Aluminum	ppm	ASTM D5185(m)	>40	6	4	4
Lead	ppm	ASTM D5185(m)	>50	<1	0	0
Copper	ppm	ASTM D5185(m)	>155	8	8	11
Tin	ppm	ASTM D5185(m)	>10	0	0	0
Antimony	ppm	ASTM D5185(m)		0	0	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)		21	24	23
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)		164	144	158
Manganese	ppm	ASTM D5185(m)		<1	<1	<1
Magnesium	ppm	ASTM D5185(m)		533	535	499
Calcium	ppm	ASTM D5185(m)		1096	1117	1323
Phosphorus	ppm	ASTM D5185(m)		703	739	723
Zinc	ppm	ASTM D5185(m)		818	791	770
Sulfur	ppm	ASTM D5185(m)		1915	1813	1651
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS



	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>30	29	19	▲ 35
Sodium	ppm	ASTM D5185(m)	>400	3	2	2
Potassium	ppm	ASTM D5185(m)	>20	2	0	<1

INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*		0	0	0
Nitration	Abs/cm	ASTM D7624*	>20	11.1	9.7	11.7
Sulfation	Abs/.1mm	ASTM D7415*	>30	22.9	22.5	23.3



OIL ANALYSIS REPORT







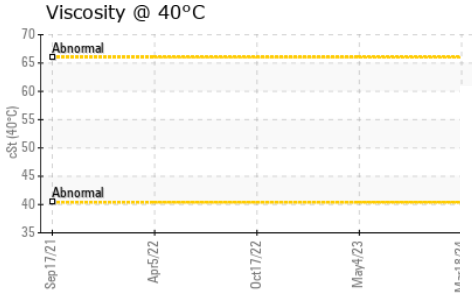
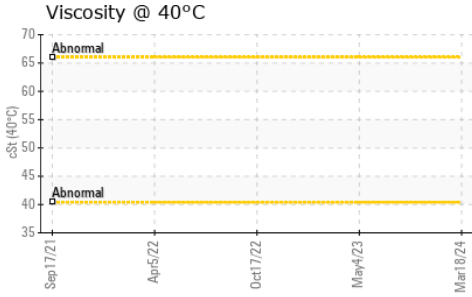


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7279*	>25	17.4	16.0	18.8

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)		58.5	---	---
Visc @ 100°C	cSt	ASTM D7279(m)		9.9	10.5	10.5
Viscosity Index (VI)	Scale	ASTM D2270*		155	---	---

GRAPHS

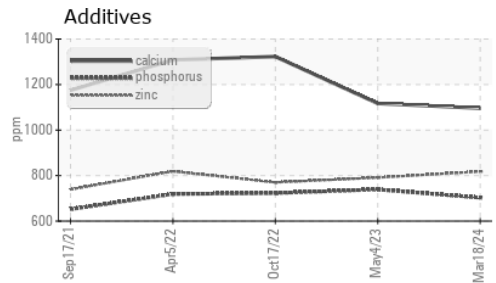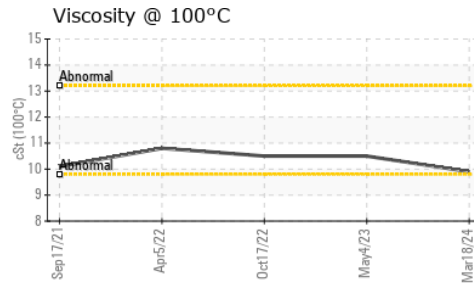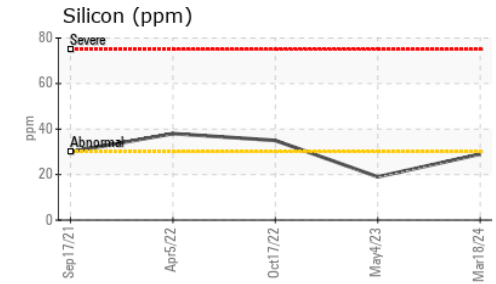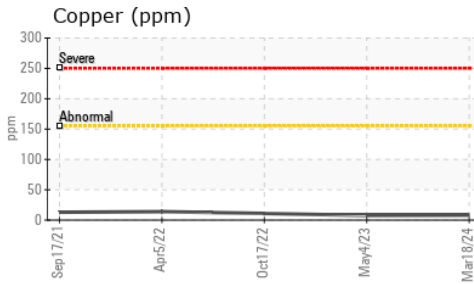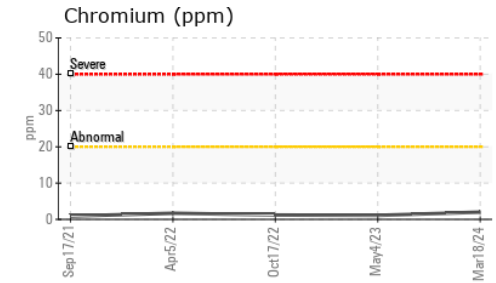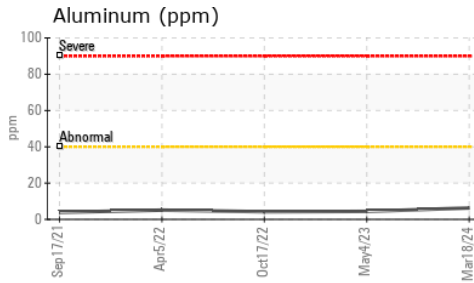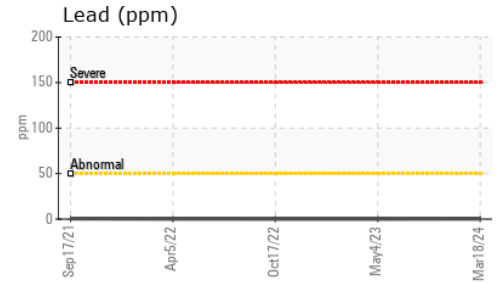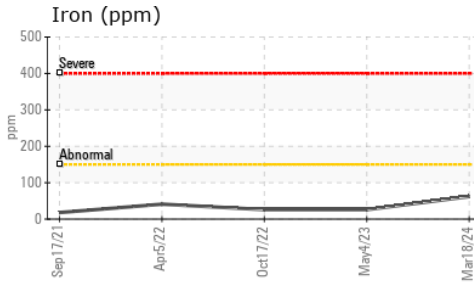

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0090755
Lab Number : 02622969
Unique Number : 5748088
Test Package : MOB 1 (Additional Tests: KV40, VI)
Received : 19 Mar 2024
Tested : 19 Mar 2024
Diagnosed : 19 Mar 2024 - Wes Davis

GFL Environmental - 504 - Edmonton
 12015 28 Street NE
 Edmonton, AB
 CA T6S 1E2
 Contact: Jerrod Adair
 jerrodadair@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: