




OIL ANALYSIS REPORT

Sample Rating Trend

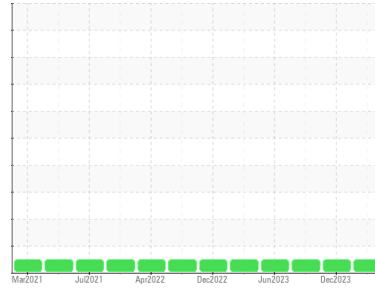

NORMAL



Machine Id
520009

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	GFL0116096	GFL0104019	GFL0093852	
Sample Date	Client Info	19 Mar 2024	12 Dec 2023	12 Sep 2023	
Machine Age	kms	Client Info	1287264	1280343	1275221
Oil Age	kms	Client Info	1900	1850	1780
Oil Changed	Client Info	Changed	Changed	Changed	
Sample Status		NORMAL	NORMAL	NORMAL	

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m) >80	5	7	8
Chromium	ppm	ASTM D5185(m) >5	0	<1	<1
Nickel	ppm	ASTM D5185(m) >2	0	<1	0
Titanium	ppm	ASTM D5185(m)	0	0	0
Silver	ppm	ASTM D5185(m) >3	0	0	0
Aluminum	ppm	ASTM D5185(m) >30	<1	2	2
Lead	ppm	ASTM D5185(m) >30	0	0	0
Copper	ppm	ASTM D5185(m) >150	4	2	2
Tin	ppm	ASTM D5185(m) >5	0	0	0
Antimony	ppm	ASTM D5185(m)	0	0	0
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	0	0	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m) 0	43	10	4
Barium	ppm	ASTM D5185(m) 0	0	0	0
Molybdenum	ppm	ASTM D5185(m) 60	64	61	58
Manganese	ppm	ASTM D5185(m) 0	0	0	<1
Magnesium	ppm	ASTM D5185(m) 1010	824	951	949
Calcium	ppm	ASTM D5185(m) 1070	1197	1060	1063
Phosphorus	ppm	ASTM D5185(m) 1150	990	962	1036
Zinc	ppm	ASTM D5185(m) 1270	1138	1167	1151
Sulfur	ppm	ASTM D5185(m) 2060	2616	2558	2549
Lithium	ppm	ASTM D5185(m)	<1	<1	<1

CONTAMINANTS


method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m) >20	4	3	4
Sodium	ppm	ASTM D5185(m)	8	2	2
Potassium	ppm	ASTM D5185(m) >20	1	0	<1

INFRA-RED

method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844* >3	0.1	0.2	0.3
Nitration	Abs/cm	ASTM D7624* >20	5.7	6.0	6.2
Sulfation	Abs./1mm	ASTM D7415* >30	18.1	18.7	18.9



OIL ANALYSIS REPORT

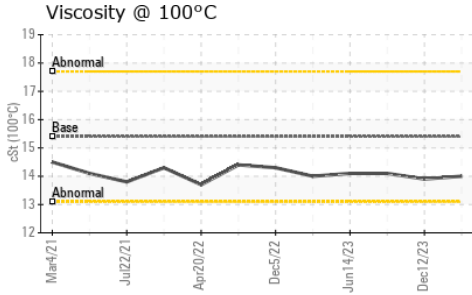

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	13.7	13.5









VISUAL

	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES

	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	13.9	14.1

GRAPHS

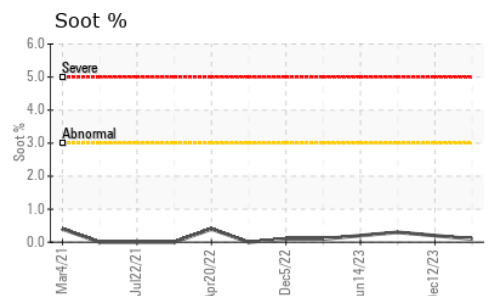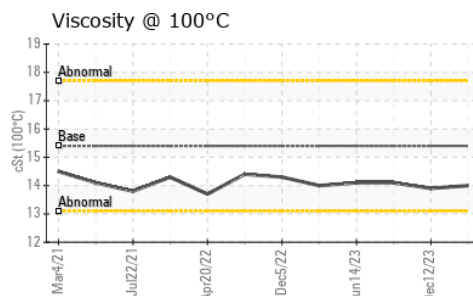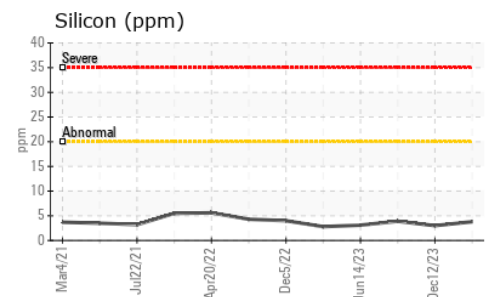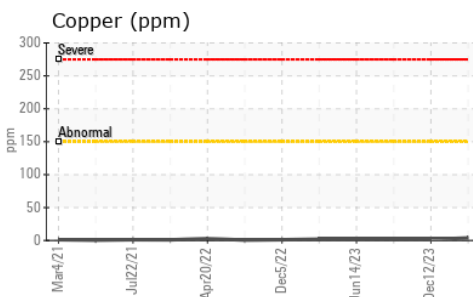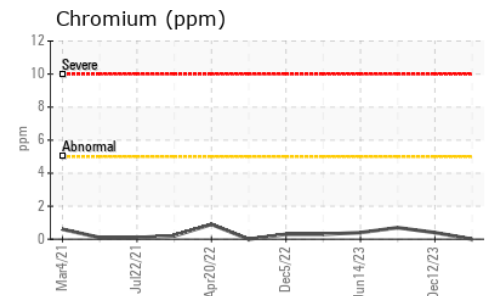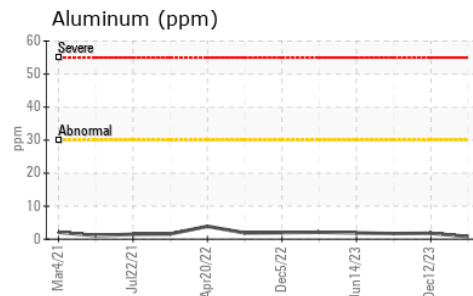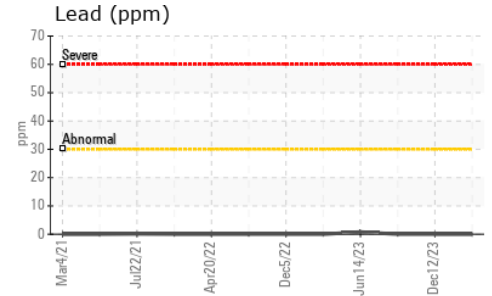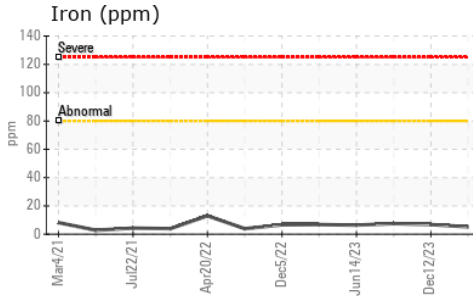

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0116096
Lab Number : 02623268
Unique Number : 5748387
Test Package : MOB 1
Received : 20 Mar 2024
Tested : 20 Mar 2024
Diagnosed : 20 Mar 2024 - Wes Davis

GFL Environmental - 257 - North York
 124 Arrow Road
 North York, ON
 CA M9M 1M6
 Contact: Jasvir Bains
 jbains@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.