




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**OR340**  
Component  
**Transmission (Auto)**  
Fluid  
**TES SYN 295 (30 LTR)**

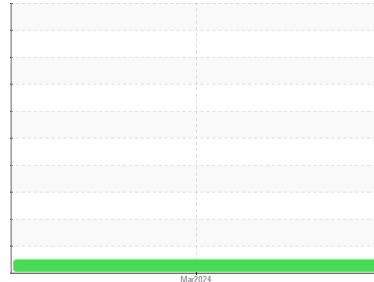

## DIAGNOSIS

### Recommendation

Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the fluid.

### Fluid Condition

Additive levels indicate the addition of a different brand, or type of fluid. The condition of the fluid is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0113367</b>	---	---
Sample Date	Client Info		<b>18 Mar 2024</b>	---	---
Machine Age	hrs	Client Info	<b>6366</b>	---	---
Oil Age	hrs	Client Info	<b>500</b>	---	---
Oil Changed	Client Info		<b>Not Chngd</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >160	<b>16</b>	---	---
Chromium	ppm	ASTM D5185(m) >5	<b>0</b>	---	---
Nickel	ppm	ASTM D5185(m) >5	<b>0</b>	---	---
Titanium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Silver	ppm	ASTM D5185(m) >5	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m) >50	<b>0</b>	---	---
Lead	ppm	ASTM D5185(m) >50	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185(m) >225	<b>2</b>	---	---
Tin	ppm	ASTM D5185(m) >10	<b>0</b>	---	---
Antimony	ppm	ASTM D5185(m)	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	---	---

## ADDITIVES


	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 85	<b>77</b>	---	---
Barium	ppm	ASTM D5185(m) 0	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185(m) 0	<b>&lt;1</b>	---	---
Manganese	ppm	ASTM D5185(m) 0	<b>0</b>	---	---
Magnesium	ppm	ASTM D5185(m) 1	<b>6</b>	---	---
Calcium	ppm	ASTM D5185(m) 100	<b>605</b>	---	---
Phosphorus	ppm	ASTM D5185(m) 200	<b>389</b>	---	---
Zinc	ppm	ASTM D5185(m) 0	<b>233</b>	---	---
Sulfur	ppm	ASTM D5185(m) 1500	<b>1731</b>	---	---
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >20	<b>1</b>	---	---
Sodium	ppm	ASTM D5185(m)	<b>1</b>	---	---
Potassium	ppm	ASTM D5185(m) >20	<b>0</b>	---	---



# OIL ANALYSIS REPORT

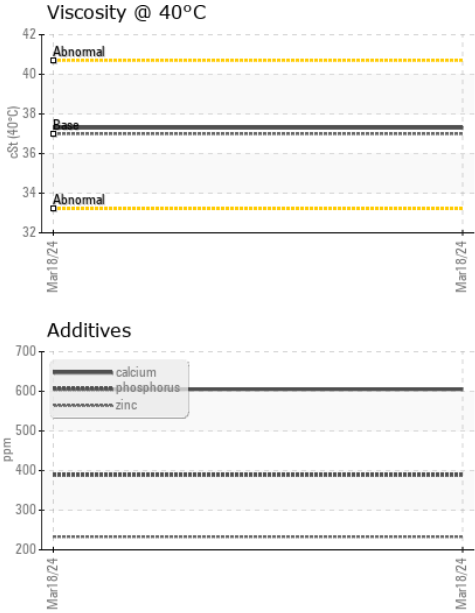


PROPERTY	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---
Free Water	scalar	Visual*		NEG	---

PROPERTY	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	37.0	37.3	---

PROPERTY	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

## GRAPHS

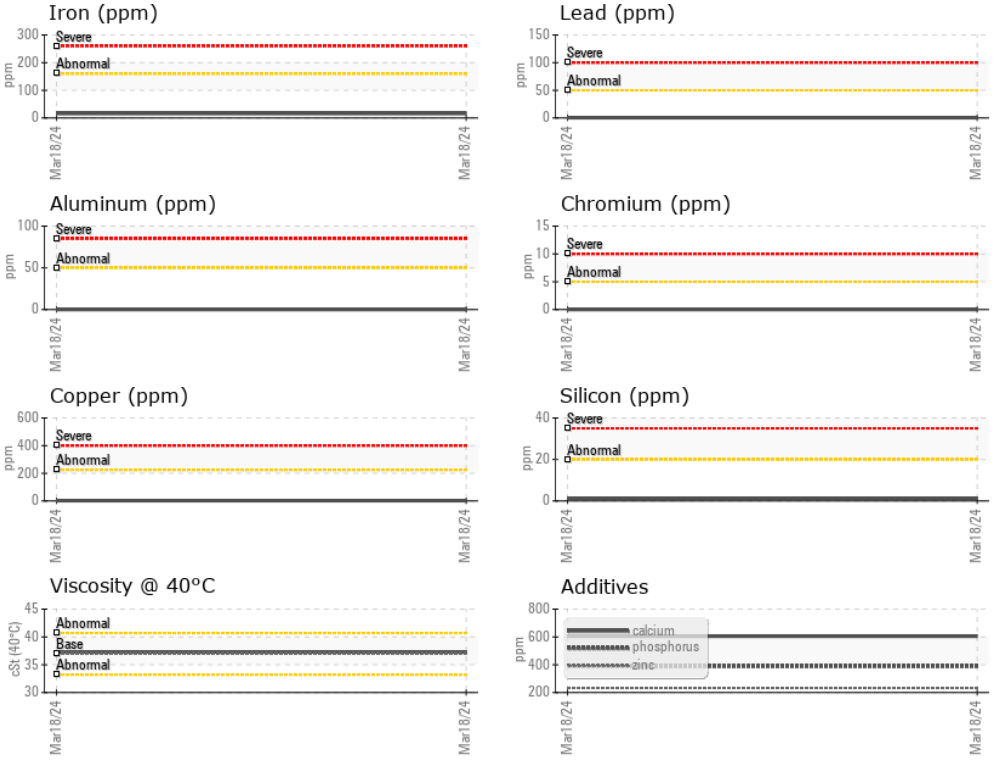

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0113367  
**Lab Number** : 02623775  
**Unique Number** : 5748894  
**Test Package** : MOB 1

**GFL Environmental - 720 - Lafleche - Landfill**  
 17125 Lafleche Road,  
 Moose Creek, ON  
 CA K0C 1W0  
 Contact: Charles Bergeron  
 cbergeron@gflenv.com  
 T: (613)538-4853  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.