




OIL ANALYSIS REPORT

Sample Rating Trend

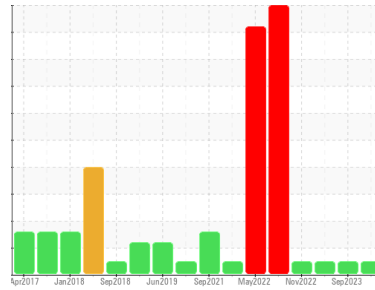

NORMAL



Machine Id
8125
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (--- LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0102613	GFL0090581	GFL0077958
Sample Date	Client Info		10 Mar 2024	02 Sep 2023	26 Mar 2023
Machine Age	hrs	Client Info	15000	14669	14521
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>80	74	33	34
Chromium	ppm	ASTM D5185(m)	>5	2	2	1
Nickel	ppm	ASTM D5185(m)	>2	1	<1	1
Titanium	ppm	ASTM D5185(m)		0	0	<1
Silver	ppm	ASTM D5185(m)	>3	0	0	0
Aluminum	ppm	ASTM D5185(m)	>30	5	2	2
Lead	ppm	ASTM D5185(m)	>30	1	<1	0
Copper	ppm	ASTM D5185(m)	>150	2	1	<1
Tin	ppm	ASTM D5185(m)	>5	0	<1	<1
Antimony	ppm	ASTM D5185(m)		0	0	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	2	<1	2	9
Barium	ppm	ASTM D5185(m)	0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	50	59	54	57
Manganese	ppm	ASTM D5185(m)	0	0	<1	<1
Magnesium	ppm	ASTM D5185(m)	950	955	888	878
Calcium	ppm	ASTM D5185(m)	1050	1044	958	1115
Phosphorus	ppm	ASTM D5185(m)	995	945	940	1015
Zinc	ppm	ASTM D5185(m)	1180	1156	1086	1097
Sulfur	ppm	ASTM D5185(m)	2600	2243	2317	2555
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS


	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>20	10	6	7
Sodium	ppm	ASTM D5185(m)		9	4	4
Potassium	ppm	ASTM D5185(m)	>20	1	<1	<1

INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>3	1.2	0.6	0.1
Nitration	Abs/cm	ASTM D7624*	>20	12.9	9.0	6.9
Sulfation	Abs./1mm	ASTM D7415*	>30	24.3	22.6	19.6



OIL ANALYSIS REPORT








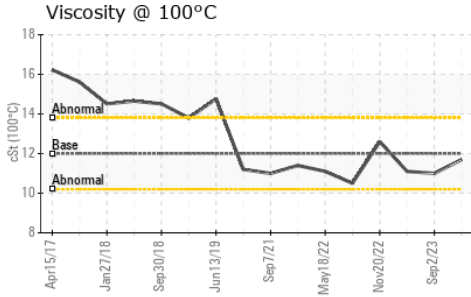


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	25.0	18.9	15.5

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	11.7	11.0	11.1

GRAPHS

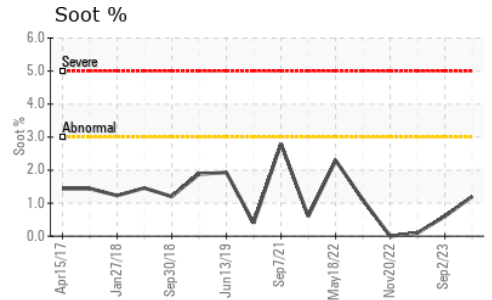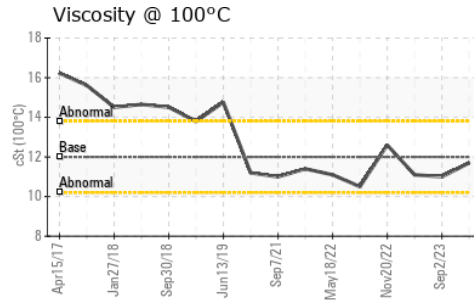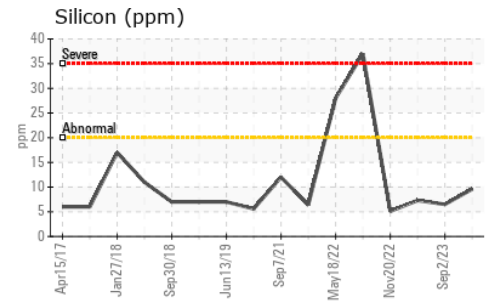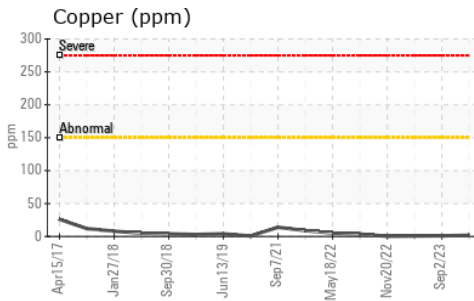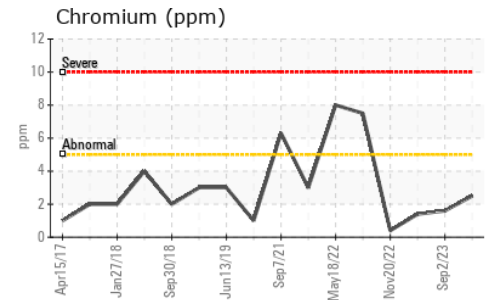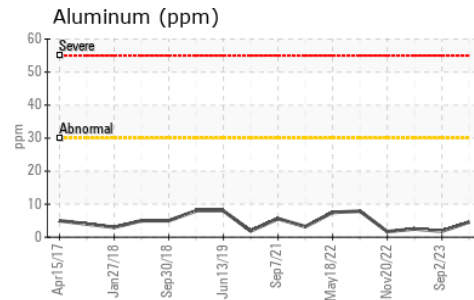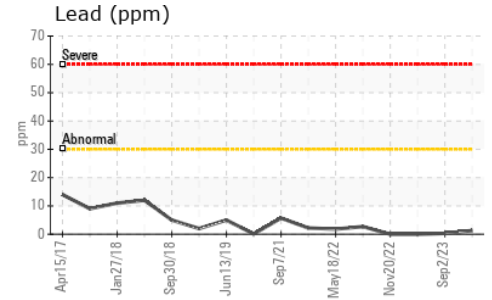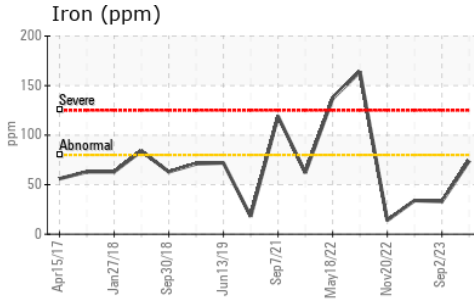

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0102613
Lab Number : **02624195**
Unique Number : 5749314
Test Package : MOB 1
Received : 25 Mar 2024
Tested : 25 Mar 2024
Diagnosed : 25 Mar 2024 - Kevin Marson

GFL Environmental - 554 - Edmonton SW
 8409 - 15th Street NW
 Edmonton, AB
 CA T6P 0B8
 Contact: Tim Greig
 tgreig@gflenv.com
 T: (780)231-0521
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.