




# OIL ANALYSIS REPORT

Sample Rating Trend

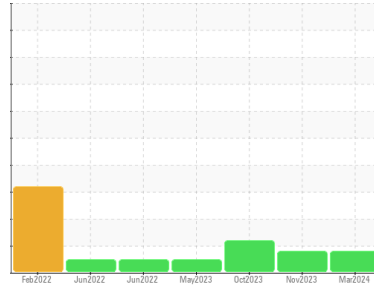

FUEL



Machine Id  
**811048**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 10W30 (--- GAL)**

## DIAGNOSIS

### Recommendation

The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

### Fluid Condition

The oil is no longer serviceable due to the presence of contaminants.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0102620</b>	GFL0097615	GFL0093891
Sample Date	Client Info		<b>15 Mar 2024</b>	06 Nov 2023	02 Oct 2023
Machine Age	hrs	Client Info	<b>5054</b>	4582	89488
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>ABNORMAL</b>	ABNORMAL	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>100	<b>45</b>	16	33
Chromium	ppm	ASTM D5185(m)	>20	<b>3</b>	<1	2
Nickel	ppm	ASTM D5185(m)	>4	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>3	<b>&lt;1</b>	<1	<1
Aluminum	ppm	ASTM D5185(m)	>20	<b>2</b>	2	2
Lead	ppm	ASTM D5185(m)	>40	<b>0</b>	<1	0
Copper	ppm	ASTM D5185(m)	>330	<b>1</b>	<1	1
Tin	ppm	ASTM D5185(m)	>15	<b>0</b>	0	0
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	2	<b>0</b>	3	2
Barium	ppm	ASTM D5185(m)	0	<b>0</b>	<1	<1
Molybdenum	ppm	ASTM D5185(m)	50	<b>58</b>	54	55
Manganese	ppm	ASTM D5185(m)	0	<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185(m)	950	<b>933</b>	877	867
Calcium	ppm	ASTM D5185(m)	1050	<b>1028</b>	952	932
Phosphorus	ppm	ASTM D5185(m)	995	<b>933</b>	923	908
Zinc	ppm	ASTM D5185(m)	1180	<b>1134</b>	1078	1063
Sulfur	ppm	ASTM D5185(m)	2600	<b>2136</b>	2261	2190
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

## CONTAMINANTS



	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>25	<b>13</b>	9	10
Sodium	ppm	ASTM D5185(m)		<b>5</b>	4	5
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	0	0
Fuel	%	ASTM D7593*	>5	<b>▲ 5.7</b>	▲ 5.7	▲ 6.5

## INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>3	<b>0.4</b>	0.2	0.4
Nitration	Abs/cm	ASTM D7624*	>20	<b>12.0</b>	8.8	11.4
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>23.9</b>	19.8	25.4



# OIL ANALYSIS REPORT







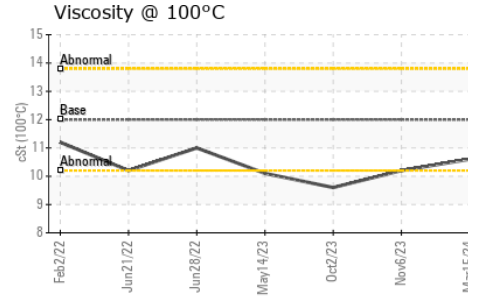
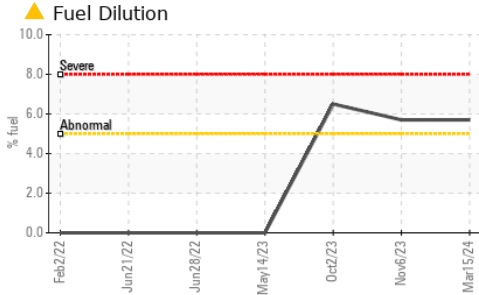


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	<b>24.9</b>	17.5	27.8

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	<b>10.6</b>	10.2	▲ 9.6

## GRAPHS

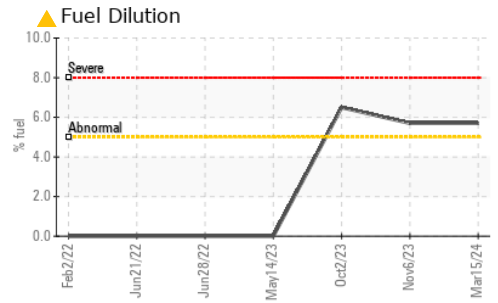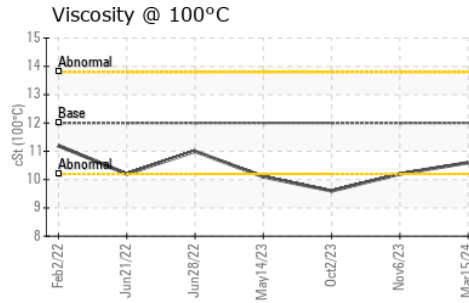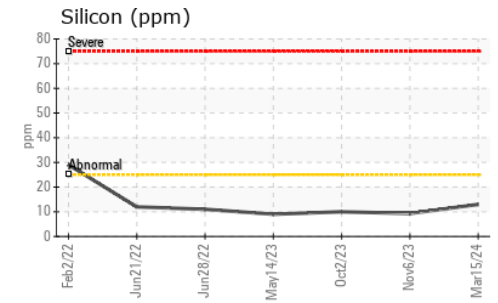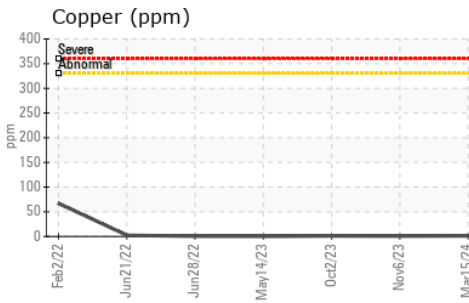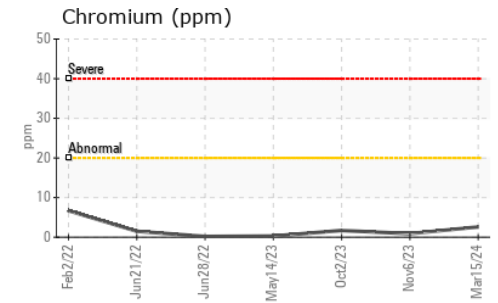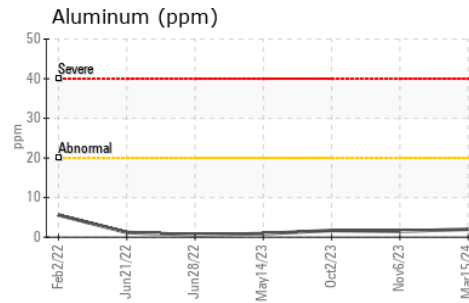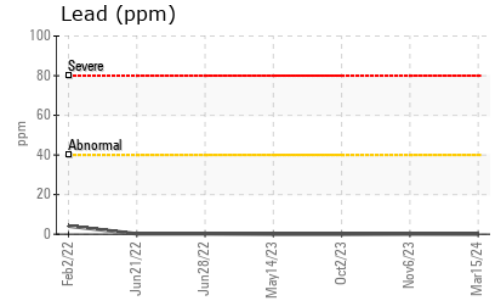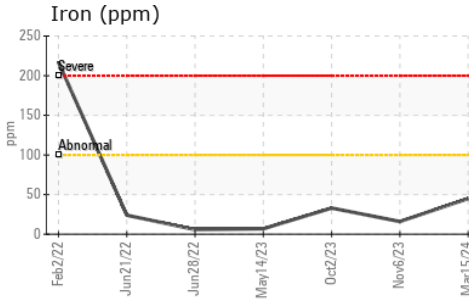

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0102620  
**Lab Number** : 02624216  
**Unique Number** : 5749335  
**Test Package** : MOB 1 ( Additional Tests: PercentFuel )  
**Received** : 25 Mar 2024  
**Tested** : 26 Mar 2024  
**Diagnosed** : 26 Mar 2024 - Wes Davis

**GFL Environmental - 554 - Edmonton SW**  
 8409 -15th Street NW  
 Edmonton, AB  
 CA T6P 0B8  
 Contact: Tim Greig  
 tgreig@gflenv.com  
 T: (780)231-0521  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.