




OIL ANALYSIS REPORT

Sample Rating Trend

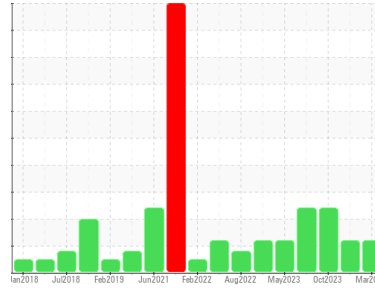

FUEL



Machine Id
7825

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 10W30 (--- LTR)

DIAGNOSIS

Recommendation

We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0112542	GFL0101707	GFL0093873
Sample Date	Client Info	26 Mar 2024	20 Nov 2023	22 Oct 2023
Machine Age	hrs	0	21371	0
Oil Age	hrs	0	0	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		ABNORMAL	ABNORMAL	SEVERE

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m) >110	25	12	22
Chromium	ppm	ASTM D5185(m) >4	1	<1	1
Nickel	ppm	ASTM D5185(m) >2	0	0	0
Titanium	ppm	ASTM D5185(m)	0	0	0
Silver	ppm	ASTM D5185(m) >2	0	<1	<1
Aluminum	ppm	ASTM D5185(m) >25	2	1	1
Lead	ppm	ASTM D5185(m) >45	0	<1	<1
Copper	ppm	ASTM D5185(m) >85	1	1	1
Tin	ppm	ASTM D5185(m) >4	0	0	0
Antimony	ppm	ASTM D5185(m)	0	0	0
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	0	0	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m) 2	2	4	8
Barium	ppm	ASTM D5185(m) 0	0	0	<1
Molybdenum	ppm	ASTM D5185(m) 50	55	54	53
Manganese	ppm	ASTM D5185(m) 0	0	0	0
Magnesium	ppm	ASTM D5185(m) 950	903	862	777
Calcium	ppm	ASTM D5185(m) 1050	991	941	900
Phosphorus	ppm	ASTM D5185(m) 995	904	899	847
Zinc	ppm	ASTM D5185(m) 1180	1071	1064	983
Sulfur	ppm	ASTM D5185(m) 2600	2225	2316	2149
Lithium	ppm	ASTM D5185(m)	<1	<1	<1

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m) >30	5	12	6
Sodium	ppm	ASTM D5185(m)	6	18	5
Potassium	ppm	ASTM D5185(m) >20	<1	<1	0
Fuel	%	ASTM D7593* >5	▲ 7.3	▲ 6.1	▲ 11.3


INFRA-RED

method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844* >3	0.8	0.4	0.6
Nitration	Abs/cm	ASTM D7624* >20	10.4	7.8	10.4
Sulfation	Abs/.1mm	ASTM D7415* >30	22.1	20.3	24.0




OIL ANALYSIS REPORT

▲ Fuel Dilution

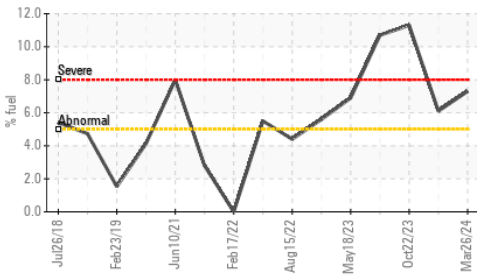

▲ Viscosity @ 100°C

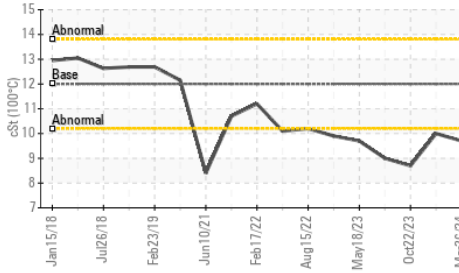

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs./1mm ASTM D7414*	>25	15.7	25.3

VISUAL


method	limit/base	current	history1	history2
Emulsified Water	scalar Visual*	>0.2	NEG	NEG
Free Water	scalar Visual*	NEG	NEG	NEG

FLUID PROPERTIES


method	limit/base	current	history1	history2
Visc @ 100°C	cSt ASTM D7279(m)	12.00	▲ 9.7	▲ 10.0

GRAPHS


Iron (ppm)

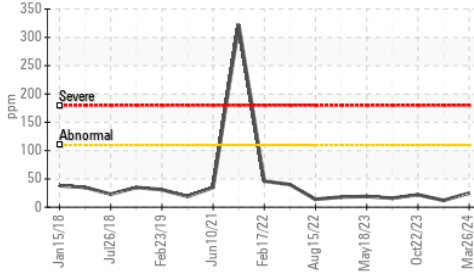


Lead (ppm)

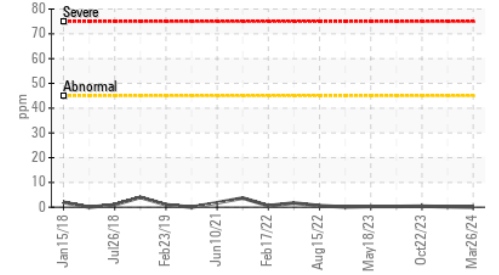


Aluminum (ppm)

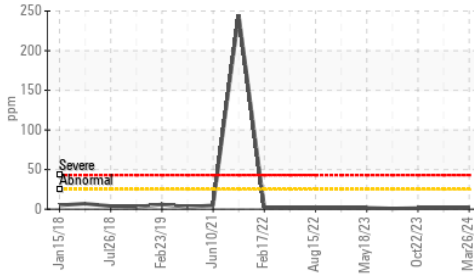


Chromium (ppm)

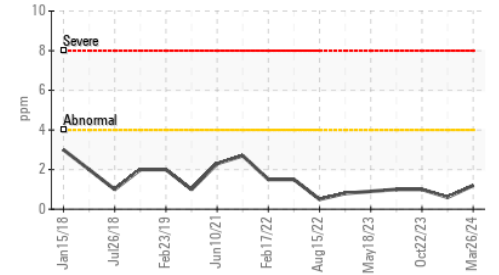


Copper (ppm)

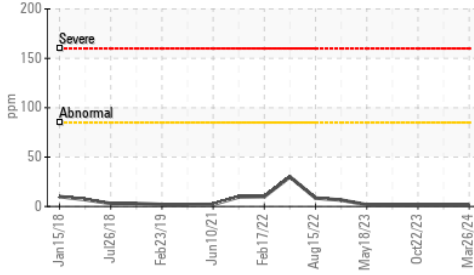


Silicon (ppm)

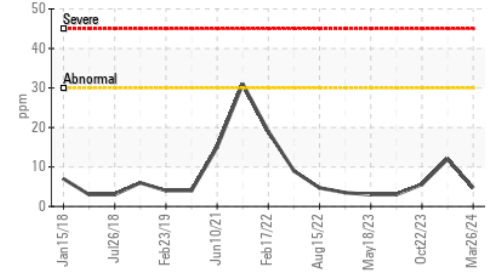

▲ Viscosity @ 100°C

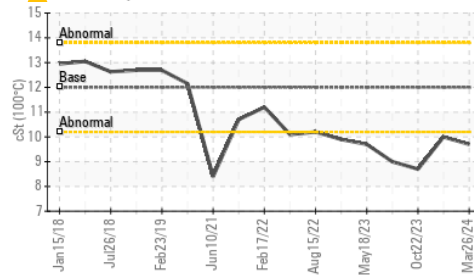

▲ Fuel Dilution

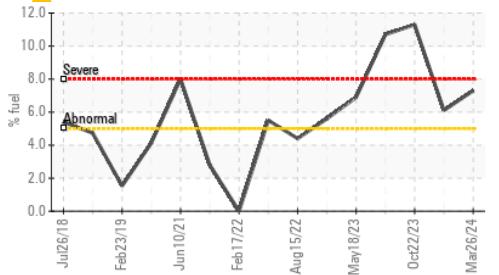

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0112542
Lab Number : 02624842
Unique Number : 5749961
Test Package : MOB 1 (Additional Tests: PercentFuel)

GFL Environmental - 554 - Edmonton SW
 8409 -15th Street NW
 Edmonton, AB
 CA T6P 0B8
 Contact: Tim Greig
 tgreig@gflenv.com
 T: (780)231-0521
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.