




# OIL ANALYSIS REPORT

Sample Rating Trend

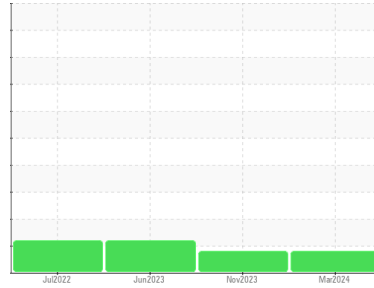

FUEL



Machine Id  
**811047**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 10W30 (--- GAL)**

## DIAGNOSIS

### Recommendation

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. No other corrective action is recommended at this time.

### Wear

All component wear rates are normal.

### Contamination

Light fuel dilution occurring. No other contaminants were detected in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0112552</b>	GFL0097618	GFL0078002
Sample Date	Client Info	<b>21 Mar 2024</b>	10 Nov 2023	12 Jun 2023
Machine Age	hrs	<b>5286</b>	4300	3589
Oil Age	hrs	<b>0</b>	0	0
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed
Sample Status		<b>MARGINAL</b>	ABNORMAL	ABNORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185(m) >100	<b>19</b>	53	24
Chromium	ppm ASTM D5185(m) >20	<b>1</b>	2	1
Nickel	ppm ASTM D5185(m) >4	<b>0</b>	<1	<1
Titanium	ppm ASTM D5185(m)	<b>0</b>	0	0
Silver	ppm ASTM D5185(m) >3	<b>0</b>	<1	<1
Aluminum	ppm ASTM D5185(m) >20	<b>1</b>	2	1
Lead	ppm ASTM D5185(m) >40	<b>0</b>	<1	0
Copper	ppm ASTM D5185(m) >330	<b>&lt;1</b>	1	<1
Tin	ppm ASTM D5185(m) >15	<b>0</b>	0	0
Antimony	ppm ASTM D5185(m)	<b>0</b>	0	0
Vanadium	ppm ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm ASTM D5185(m)	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m) 2	<b>3</b>	6	1
Barium	ppm ASTM D5185(m) 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185(m) 50	<b>56</b>	56	56
Manganese	ppm ASTM D5185(m) 0	<b>0</b>	<1	<1
Magnesium	ppm ASTM D5185(m) 950	<b>914</b>	857	928
Calcium	ppm ASTM D5185(m) 1050	<b>1001</b>	970	1005
Phosphorus	ppm ASTM D5185(m) 995	<b>925</b>	903	1009
Zinc	ppm ASTM D5185(m) 1180	<b>1109</b>	1062	1148
Sulfur	ppm ASTM D5185(m) 2600	<b>2303</b>	2187	2361
Lithium	ppm ASTM D5185(m)	<b>&lt;1</b>	<1	<1

## CONTAMINANTS



method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >25	<b>8</b>	11	10
Sodium	ppm ASTM D5185(m)	<b>4</b>	5	5
Potassium	ppm ASTM D5185(m) >20	<b>0</b>	0	<1
Fuel	% ASTM D7593* >5	<b>▲ 4.2</b>	▲ 6.9	▲ 5.9

## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% ASTM D7844* >3	<b>0.1</b>	0.6	0.3
Nitration	Abs/cm ASTM D7624* >20	<b>9.5</b>	12.3	9.9
Sulfation	Abs./1mm ASTM D7415* >30	<b>20.1</b>	26.5	22.3



# OIL ANALYSIS REPORT







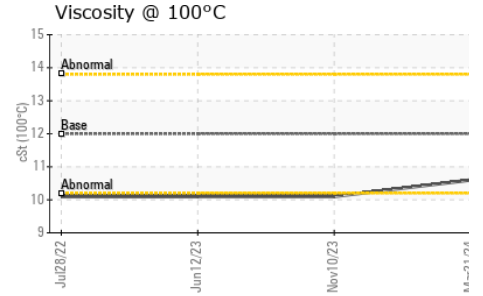
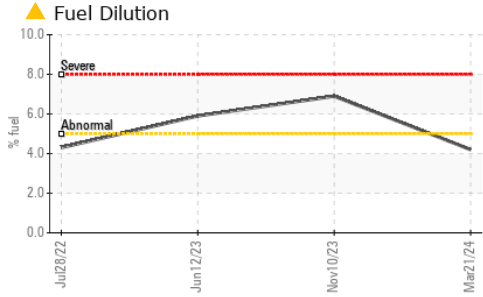


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	<b>18.6</b>	28.6	22.1

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	<b>10.6</b>	10.1	▲ 10.1

## GRAPHS

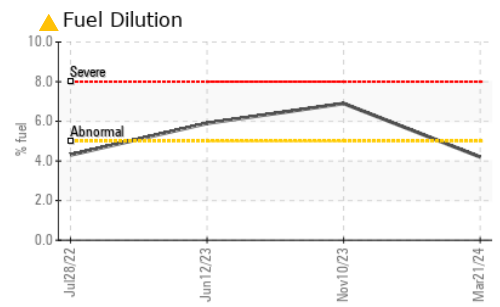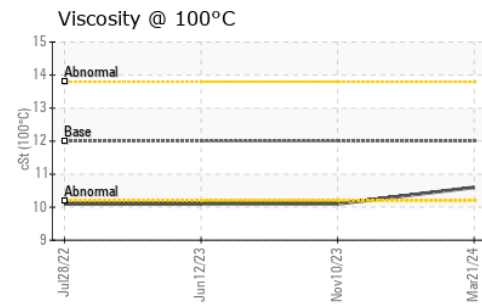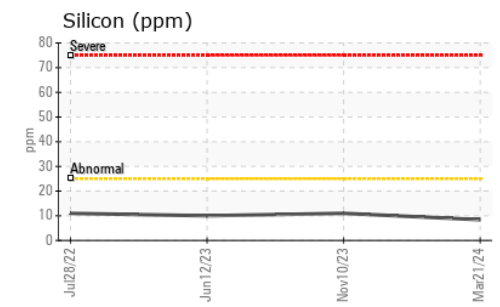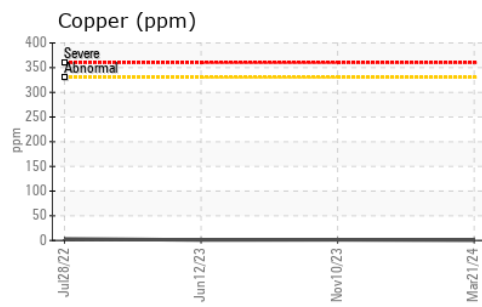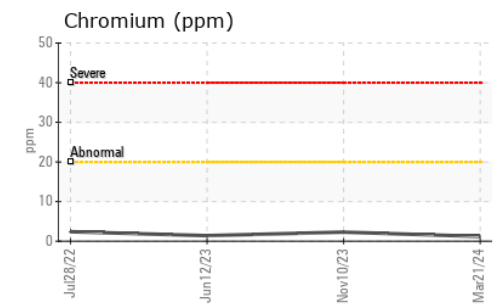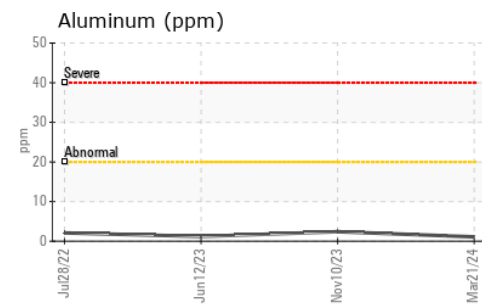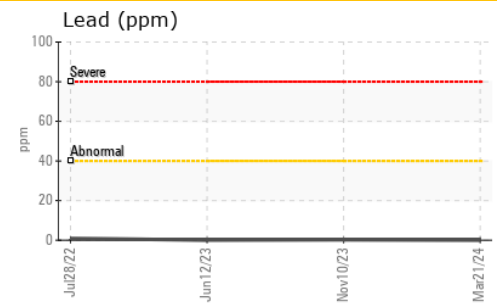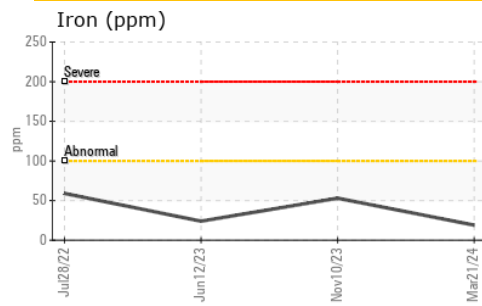

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0112552  
**Lab Number** : 02624844  
**Unique Number** : 5749963  
**Test Package** : MOB 1 ( Additional Tests: PercentFuel )

**GFL Environmental - 554 - Edmonton SW**  
 8409 -15th Street NW  
 Edmonton, AB  
 CA T6P 0B8  
 Contact: Tim Greig  
 tgreig@gflenv.com  
 T: (780)231-0521  
 F:

**Received** : 27 Mar 2024  
**Tested** : 28 Mar 2024  
**Diagnosed** : 28 Mar 2024 - Wes Davis

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.