



OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Machine Id
501033

Component
Diesel Engine

Fluid
DIESEL ENGINE OIL SAE 30 (--- LTR)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DIESEL ENGINE OIL SAE 30. Please confirm.

Wear

All component wear rates are normal.

Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

| SAMPLE INFORMATION | | method | limit/base | current | history1 | history2 |
|--------------------|-------------|-------------|------------|--------------------|----------|----------|
| Sample Number | Client Info | | | GFL0112546 | --- | --- |
| Sample Date | Client Info | | | 25 Mar 2024 | --- | --- |
| Machine Age | hrs | Client Info | | 22255 | --- | --- |
| Oil Age | hrs | Client Info | | 0 | --- | --- |
| Oil Changed | Client Info | | | Changed | --- | --- |
| Sample Status | | | | NORMAL | --- | --- |

| CONTAMINATION | | method | limit/base | current | history1 | history2 |
|---------------|-----------|--------|------------|------------|----------|----------|
| Water | WC Method | >0.2 | | NEG | --- | --- |
| Glycol | WC Method | | | NEG | --- | --- |

| WEAR METALS | | method | limit/base | current | history1 | history2 |
|-------------|-----|---------------|------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185(m) | >100 | 4 | --- | --- |
| Chromium | ppm | ASTM D5185(m) | >20 | <1 | --- | --- |
| Nickel | ppm | ASTM D5185(m) | >4 | 0 | --- | --- |
| Titanium | ppm | ASTM D5185(m) | | 0 | --- | --- |
| Silver | ppm | ASTM D5185(m) | >3 | 0 | --- | --- |
| Aluminum | ppm | ASTM D5185(m) | >20 | 2 | --- | --- |
| Lead | ppm | ASTM D5185(m) | >40 | 0 | --- | --- |
| Copper | ppm | ASTM D5185(m) | >330 | <1 | --- | --- |
| Tin | ppm | ASTM D5185(m) | >15 | 0 | --- | --- |
| Antimony | ppm | ASTM D5185(m) | | 0 | --- | --- |
| Vanadium | ppm | ASTM D5185(m) | | 0 | --- | --- |
| Beryllium | ppm | ASTM D5185(m) | | 0 | --- | --- |
| Cadmium | ppm | ASTM D5185(m) | | 0 | --- | --- |



| ADDITIVES | | method | limit/base | current | history1 | history2 |
|------------|-----|---------------|------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185(m) | 250 | 2 | --- | --- |
| Barium | ppm | ASTM D5185(m) | 10 | 0 | --- | --- |
| Molybdenum | ppm | ASTM D5185(m) | 100 | 55 | --- | --- |
| Manganese | ppm | ASTM D5185(m) | | 0 | --- | --- |
| Magnesium | ppm | ASTM D5185(m) | 450 | 942 | --- | --- |
| Calcium | ppm | ASTM D5185(m) | 3000 | 1017 | --- | --- |
| Phosphorus | ppm | ASTM D5185(m) | 1150 | 978 | --- | --- |
| Zinc | ppm | ASTM D5185(m) | 1350 | 1144 | --- | --- |
| Sulfur | ppm | ASTM D5185(m) | 4250 | 2510 | --- | --- |
| Lithium | ppm | ASTM D5185(m) | | <1 | --- | --- |

| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
|--------------|-----|---------------|------------|--------------|----------|----------|
| Silicon | ppm | ASTM D5185(m) | >25 | 1 | --- | --- |
| Sodium | ppm | ASTM D5185(m) | >75 | <1 | --- | --- |
| Potassium | ppm | ASTM D5185(m) | >20 | <1 | --- | --- |
| Fuel | % | ASTM D7593* | >5 | 0.5 | --- | --- |

| INFRA-RED | | method | limit/base | current | history1 | history2 |
|-----------|----------|-------------|------------|-------------|----------|----------|
| Soot % | % | ASTM D7844* | >3 | 0.1 | --- | --- |
| Nitration | Abs/cm | ASTM D7624* | >20 | 5.1 | --- | --- |
| Sulfation | Abs./1mm | ASTM D7415* | >30 | 18.4 | --- | --- |



OIL ANALYSIS REPORT

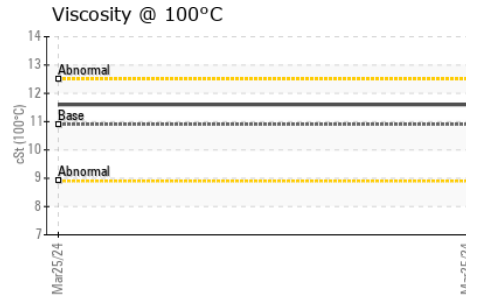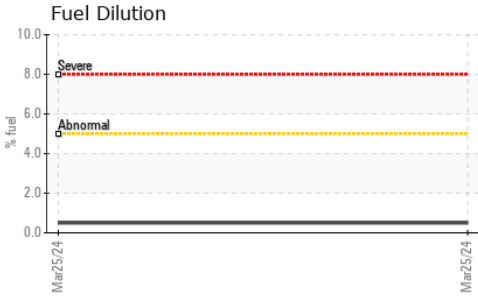

FLUID DEGRADATION

| method | limit/base | current | history1 | history2 | |
|-----------|----------------------|---------|----------|----------|-----|
| Oxidation | Abs./1mm ASTM D7414* | >25 | 13.4 | --- | --- |









VISUAL

| method | limit/base | current | history1 | history2 | |
|------------------|----------------|---------|----------|----------|-----|
| Emulsified Water | scalar Visual* | >0.2 | NEG | --- | --- |
| Free Water | scalar Visual* | | NEG | --- | --- |

FLUID PROPERTIES

| method | limit/base | current | history1 | history2 | |
|--------------|-------------------|---------|----------|----------|-----|
| Visc @ 100°C | cSt ASTM D7279(m) | 10.9 | 11.6 | --- | --- |

GRAPHS

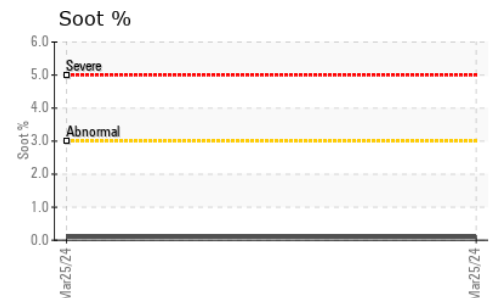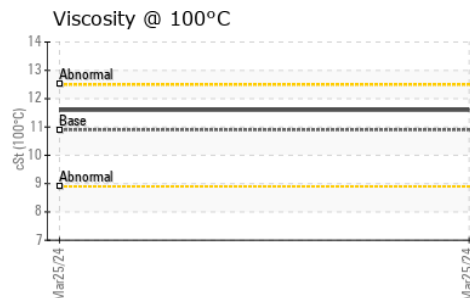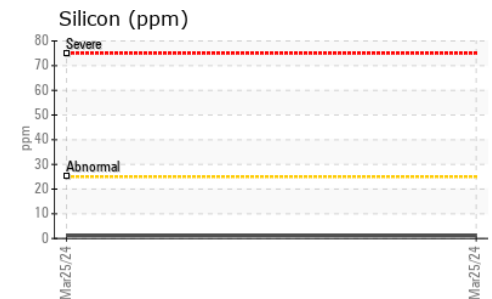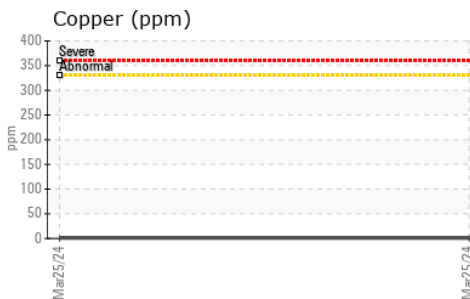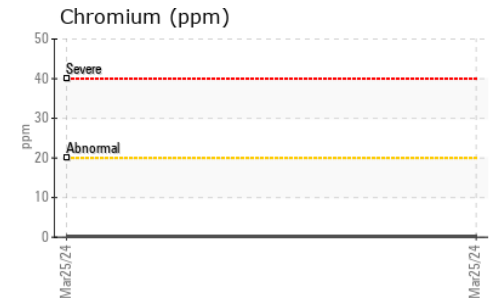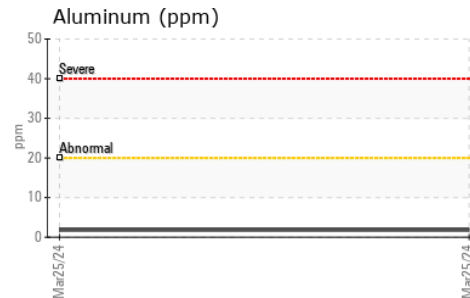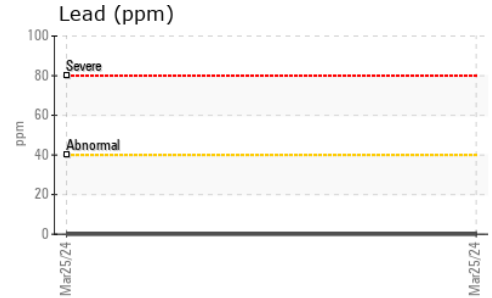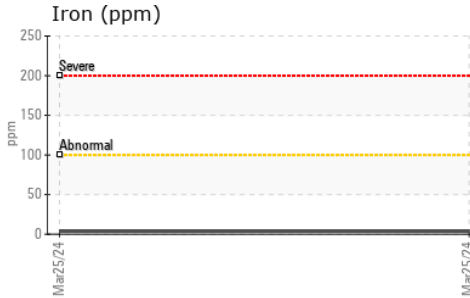

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0112546
Lab Number : 02624849
Unique Number : 5749968
Test Package : MOB 1 (Additional Tests: FuelDilution, PercentFuel)

GFL Environmental - 554 - Edmonton SW
 8409 -15th Street NW
 Edmonton, AB
 CA T6P 0B8
 Contact: Tim Greig
 tgreig@gflenv.com
 T: (780)231-0521
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.