


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

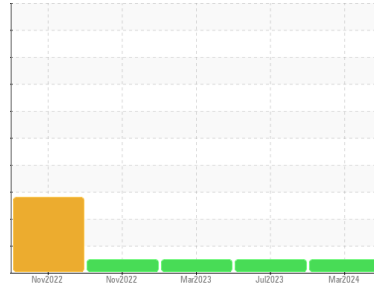

Machine Id

TB115

Component

Diesel Engine

Fluid

PETRO CANADA SUPREME SYNTHETIC 5W40 (16 LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PC0078483	PC0077046	PC0072032
Sample Date	Client Info			14 Mar 2024	28 Jul 2023	27 Mar 2023
Machine Age	hrs	Client Info		1639	1105	620
Oil Age	hrs	Client Info		0	500	500
Oil Changed	Client Info			Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG




WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>100	21	15	26
Chromium	ppm	ASTM D5185(m)	>20	1	1	2
Nickel	ppm	ASTM D5185(m)	>4	<1	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	<1
Silver	ppm	ASTM D5185(m)	>3	0	0	0
Aluminum	ppm	ASTM D5185(m)	>20	22	9	30
Lead	ppm	ASTM D5185(m)	>40	0	0	<1
Copper	ppm	ASTM D5185(m)	>330	6	4	8
Tin	ppm	ASTM D5185(m)	>15	1	1	2
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	190	26	29	67
Barium	ppm	ASTM D5185(m)	0	<1	<1	2
Molybdenum	ppm	ASTM D5185(m)	79	57	60	77
Manganese	ppm	ASTM D5185(m)		0	<1	2
Magnesium	ppm	ASTM D5185(m)	564	1113	1120	1051
Calcium	ppm	ASTM D5185(m)	993	852	856	970
Phosphorus	ppm	ASTM D5185(m)	763	981	1037	1038
Zinc	ppm	ASTM D5185(m)	835	1205	1188	1154
Sulfur	ppm	ASTM D5185(m)	2536	2643	2742	2827
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	4	6	8
Sodium	ppm	ASTM D5185(m)		5	5	5
Potassium	ppm	ASTM D5185(m)	>20	33	17	63

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>3	0.1	0	0
Nitration	Abs/cm	ASTM D7624*	>20	10.9	9.6	10.4
Sulfation	Abs/.1mm	ASTM D7415*	>30	21.2	21.3	23.3

OIL ANALYSIS REPORT






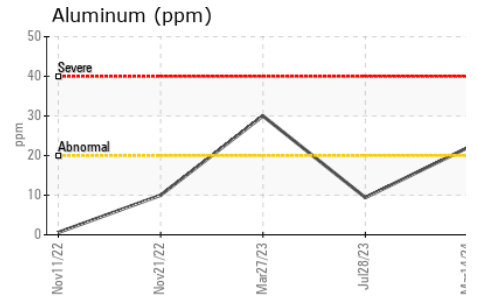
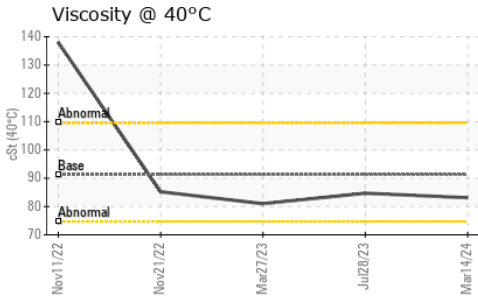
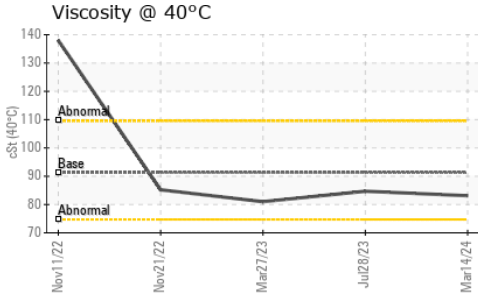


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	21.0	19.0	19.4

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Precipitate	scalar	Visual*	NONE	NONE	---	---
Silt	scalar	Visual*	NONE	VLITE	---	---
Debris	scalar	Visual*	NONE	VLITE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	91.3	83.1	84.7	81.0
Visc @ 100°C	cSt	ASTM D7279(m)	14.8	13.5	13.8	12.7
Viscosity Index (VI)	Scale	ASTM D2270*	170	165	167	155

GRAPHS

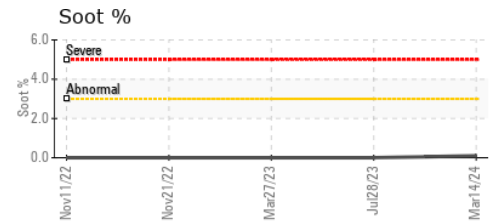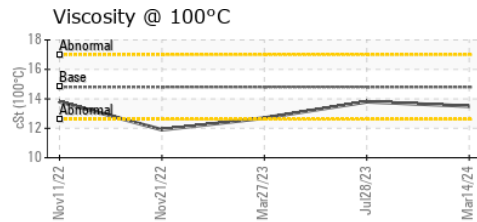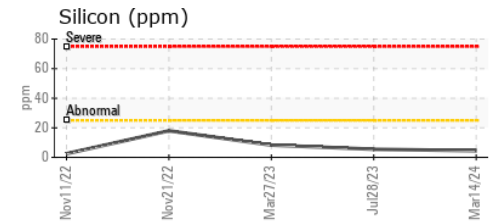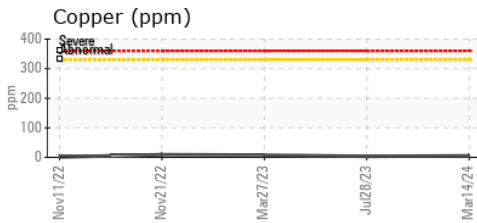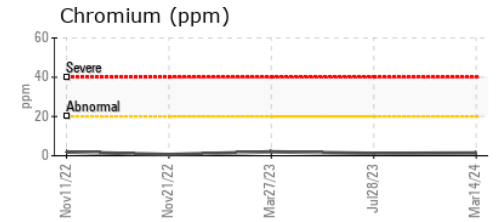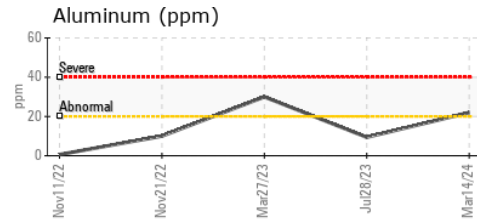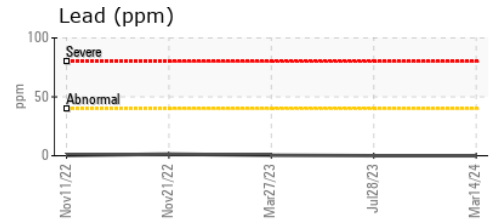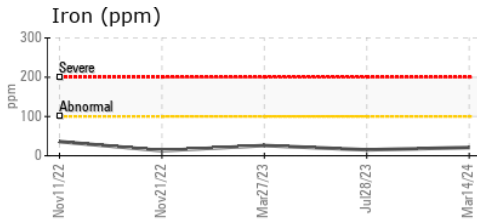

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0078483
Lab Number : 02624868
Unique Number : 5749987
Test Package : MOB 1 (Additional Tests: KV40, VI, Visual)

Green Infrastructure and Partners Inc (GIPI) - 286 - Shoring & Foundations
 151 Ram Forest Rd,
 Stouffville, ON
 CA L4A 2G8
 Contact: Shannon Abbott
 sabbott@gipi.com
 T: (905)750-5900
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.