

OIL ANALYSIS REPORT

[13966599] MAChine Id MPG A F-71104

Component

Unknown Component

{not provided} (--- GAL)

Sample Rating Trend ISO Feat/024

DIAGNOSIS

Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. We recommend you service the filters on this component. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample. Please provide more complete information on your next sample.

Wear

Component wear rates appear to be normal (unconfirmed).

Contamination

There is a light amount of silt (particulates < 14 microns in size) present in the sample.


Fluid Condition

Viscosity of sample indicates oil is within ATF range, advise investigate. The AN level is acceptable for this fluid. The condition of the sample is acceptable for the time in service (unconfirmed).

				Feb2024		
SAMPLE INFORI	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PC		
Sample Date		Client Info		17 Feb 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ATTENTION		
CONTAMINAT	ION	method	limit/base	current	history1	history2
Water		WC Method		NEG		
WEAR METAL	S	method	limit/base	current	history1	history2
PQ		ASTM D8184*		0		
Iron	ppm	ASTM D5185(m)		0		
Chromium	ppm	ASTM D5185(m)		0		
Nickel	ppm	ASTM D5185(m)		0		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)		0		
Lead	ppm	ASTM D5185(m)		0		
Copper	ppm	ASTM D5185(m)		<1		
Tin	ppm	ASTM D5185(m)		0		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		0		
Barium	ppm	ASTM D5185(m)		0		
Molybdenum	ppm	ASTM D5185(m)		0		
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm	ASTM D5185(m)		<1		
Calcium	ppm	ASTM D5185(m)		37		
Phosphorus	ppm	ASTM D5185(m)		177		
Zinc	ppm	ASTM D5185(m)		139		
Sulfur	ppm	ASTM D5185(m)		1951		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINAN	TS _	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)		0		
Sodium	ppm	ASTM D5185(m)		<1		
Potassium	ppm	ASTM D5185(m)	>20	<1		



OIL ANALYSIS REPORT

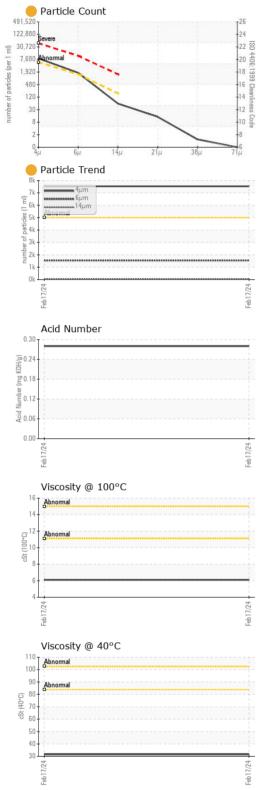

INESS	method	limit/base	current	history1	history2
1200					
			-		
	ISO 4406 (c)	>19/17/14	0 20/18/13		
ATION	method	limit/base	current	history1	history2
mg KOH/g	ASTM D974*		0.28		
	method	limit/base	current	history1	history2
scalar	Visual*	NONE	NONE		
scalar	Visual*	NONE	NONE		
scalar	Visual*	NONE	NONE		
scalar	Visual*	NONE	NONE		
scalar	Visual*	NONE	NONE		
scalar	Visual*	NONE	NONE		
scalar	Visual*	NORML	NORML		
scalar	Visual*	NORML	NORML		
scalar	Visual*		NEG		
scalar	Visual*		NEG		
RTIES	method	limit/base	current	history1	history2
cSt	ASTM D7279(m)		31.5		
cSt	ASTM D7279(m)		6.1		
Scale	ASTM D2270*		144		
ES	method	limit/base	current	history1	history2
				no image	no image
				no image	no image
	scalar sc	ASTM D7647 ISO 4406 (c) ATION method mg KOH/g ASTM D974* method scalar Visual* scalar ASTM D7279(m) CST ASTM D7279(m) Scale ASTM D2270*	ASTM D7647 >5000 ASTM D7647 >1300 ASTM D7647 >160 ASTM D7647 >40 ASTM D7647 >10 ASTM D7647 >3 ISO 4406 (c) >19/17/14 DATION method limit/base mg KOH/g ASTM D974* method limit/base scalar Visual* NONE scalar Visual* NORML scalar Visual* Scalar Vis	ASTM D7647 >5000 7529 ASTM D7647 >1300 1545 ASTM D7647 >160 52 ASTM D7647 >40 12 ASTM D7647 >10 1 ASTM D7647 >3 0 ISO 4406 (c) >19/17/14 20/18/13 DATION method limit/base current mg KOH/g ASTM D974* 0.28 Method limit/base current	ASTM D7647 >5000 7529 ASTM D7647 >1300 1545 ASTM D7647 >160 52 ASTM D7647 >40 12 ASTM D7647 >3 0 ISO 4406 (c) >19/17/14 20/18/13 DATION method limit/base current history1 mg KOH/g ASTM D974* 0.28 method limit/base current history1 scalar Visual* NONE NONE scalar Visual* NORML NORML scalar Visual* NORML NORML



CALA ISO 17025:2017 Accredited Laboratory

Sample No.

Laboratory

Unique Number : 5750806

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 : PC Received : 01 Apr 2024 Lab Number : 02625687 **Tested** : 02 Apr 2024 Diagnosed : 03 Apr 2024 - Kevin Marson

Test Package: MAR 2 (Additional Tests: KV100, PQ, PRTCOUNT, VI)

To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

Suncor - Terra Nova Projects Scotia Centre, 235 Water Strret

> CA A1C 1B6 Contact: Josh Hynes joshynes@suncor.com

T: (709)778-3575 F: (709)724-2835

St. John's, NL