




# OIL ANALYSIS REPORT

Sample Rating Trend

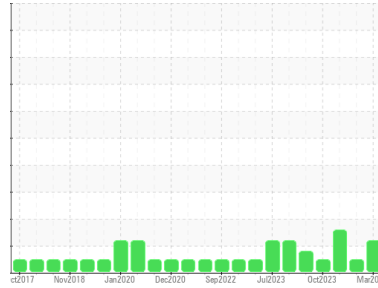

## FUEL



Machine Id  
**701027**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (22 LTR)**

### DIAGNOSIS

**Recommendation**  
The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

**Wear**  
All component wear rates are normal.

**Contamination**  
There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

**Fluid Condition**  
Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

### SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2    |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info |             | <b>GFL0117919</b>  | GFL0107138  | GFL0107147  |
| Sample Date   | Client Info |             | <b>27 Mar 2024</b> | 18 Jan 2024 | 15 Jan 2024 |
| Machine Age   | hrs         | Client Info | <b>11833</b>       | 186902      | 11377       |
| Oil Age       | hrs         | Client Info | <b>600</b>         | 0           | 0           |
| Oil Changed   | Client Info |             | <b>Changed</b>     | Not Changd  | Changed     |
| Sample Status |             |             | <b>ABNORMAL</b>    | NORMAL      | ABNORMAL    |

### CONTAMINATION

|        | method    | limit/base | current    | history1 | history2 |
|--------|-----------|------------|------------|----------|----------|
| Water  | WC Method | >0.2       | <b>NEG</b> | NEG      | NEG      |
| Glycol | WC Method |            | <b>NEG</b> | NEG      | 0.0      |

### WEAR METALS

|           | method | limit/base    | current | history1     | history2 |    |
|-----------|--------|---------------|---------|--------------|----------|----|
| Iron      | ppm    | ASTM D5185(m) | >80     | <b>23</b>    | 11       | 58 |
| Chromium  | ppm    | ASTM D5185(m) | >5      | <b>&lt;1</b> | <1       | 4  |
| Nickel    | ppm    | ASTM D5185(m) | >2      | <b>&lt;1</b> | <1       | <1 |
| Titanium  | ppm    | ASTM D5185(m) |         | <b>0</b>     | 0        | 0  |
| Silver    | ppm    | ASTM D5185(m) | >3      | <b>0</b>     | 0        | 0  |
| Aluminum  | ppm    | ASTM D5185(m) | >30     | <b>3</b>     | 2        | 10 |
| Lead      | ppm    | ASTM D5185(m) | >30     | <b>0</b>     | 0        | 0  |
| Copper    | ppm    | ASTM D5185(m) | >150    | <b>&lt;1</b> | <1       | 1  |
| Tin       | ppm    | ASTM D5185(m) | >5      | <b>0</b>     | 0        | 0  |
| Antimony  | ppm    | ASTM D5185(m) |         | <b>0</b>     | 0        | 0  |
| Vanadium  | ppm    | ASTM D5185(m) |         | <b>0</b>     | 0        | 0  |
| Beryllium | ppm    | ASTM D5185(m) |         | <b>0</b>     | 0        | 0  |
| Cadmium   | ppm    | ASTM D5185(m) |         | <b>0</b>     | 0        | 0  |

### ADDITIVES

|            | method | limit/base    | current | history1     | history2 |      |
|------------|--------|---------------|---------|--------------|----------|------|
| Boron      | ppm    | ASTM D5185(m) | 0       | <b>8</b>     | 14       | 28   |
| Barium     | ppm    | ASTM D5185(m) | 0       | <b>0</b>     | 0        | 0    |
| Molybdenum | ppm    | ASTM D5185(m) | 60      | <b>56</b>    | 57       | 60   |
| Manganese  | ppm    | ASTM D5185(m) | 0       | <b>0</b>     | 0        | <1   |
| Magnesium  | ppm    | ASTM D5185(m) | 1010    | <b>871</b>   | 901      | 811  |
| Calcium    | ppm    | ASTM D5185(m) | 1070    | <b>962</b>   | 1017     | 1079 |
| Phosphorus | ppm    | ASTM D5185(m) | 1150    | <b>887</b>   | 965      | 926  |
| Zinc       | ppm    | ASTM D5185(m) | 1270    | <b>1083</b>  | 1121     | 1111 |
| Sulfur     | ppm    | ASTM D5185(m) | 2060    | <b>2203</b>  | 2673     | 2436 |
| Lithium    | ppm    | ASTM D5185(m) |         | <b>&lt;1</b> | <1       | <1   |

### CONTAMINANTS

|           | method | limit/base    | current | history1     | history2 |      |
|-----------|--------|---------------|---------|--------------|----------|------|
| Silicon   | ppm    | ASTM D5185(m) | >20     | <b>7</b>     | 6        | ▲ 22 |
| Sodium    | ppm    | ASTM D5185(m) |         | <b>33</b>    | 7        | 31   |
| Potassium | ppm    | ASTM D5185(m) | >20     | <b>3</b>     | 2        | 9    |
| Fuel      | %      | ASTM D7593*   | >5      | ▲ <b>7.5</b> | <1.0     | <1.0 |


### INFRA-RED

|           | method   | limit/base  | current | history1    | history2 |      |
|-----------|----------|-------------|---------|-------------|----------|------|
| Soot %    | %        | ASTM D7844* | >3      | <b>0.3</b>  | 0        | 0.4  |
| Nitration | Abs/cm   | ASTM D7624* | >20     | <b>11.3</b> | 6.1      | 13.6 |
| Sulfation | Abs./1mm | ASTM D7415* | >30     | <b>21.8</b> | 18.9     | 25.9 |




# OIL ANALYSIS REPORT

## ▲ Fuel Dilution

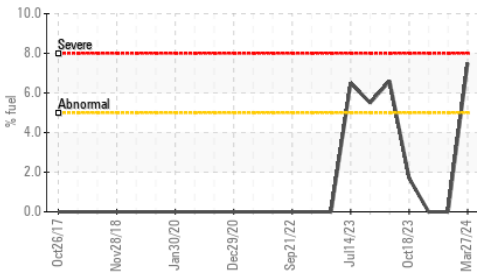

## ▲ Viscosity @ 100°C

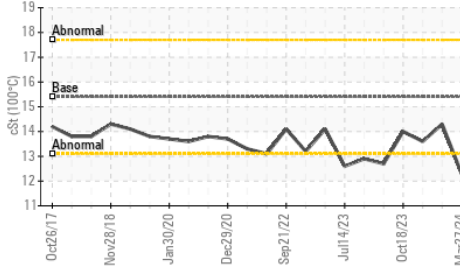

## FLUID DEGRADATION

| method    | limit/base           | current | history1 | history2 |      |
|-----------|----------------------|---------|----------|----------|------|
| Oxidation | Abs./1mm ASTM D7414* | >25     | 22.4     | 14.8     | 26.2 |

## VISUAL


| method           | limit/base     | current | history1 | history2 |     |
|------------------|----------------|---------|----------|----------|-----|
| Emulsified Water | scalar Visual* | >0.2    | NEG      | NEG      | NEG |
| Free Water       | scalar Visual* | NEG     | NEG      | NEG      |     |

## FLUID PROPERTIES


| method       | limit/base        | current | history1 | history2 |      |
|--------------|-------------------|---------|----------|----------|------|
| Visc @ 100°C | cSt ASTM D7279(m) | 15.4    | ▲ 12.3   | 14.3     | 13.6 |

## GRAPHS


### Iron (ppm)

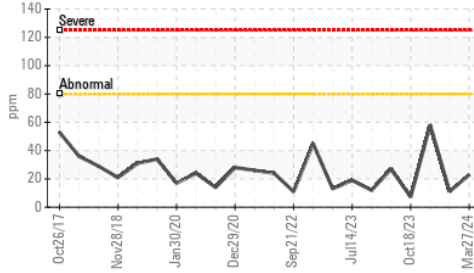


### Lead (ppm)

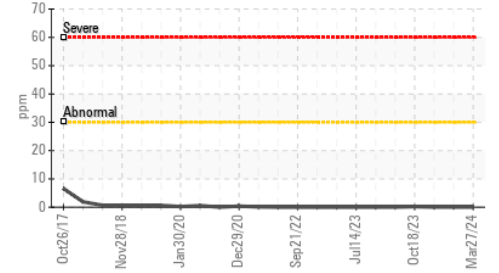


### Aluminum (ppm)

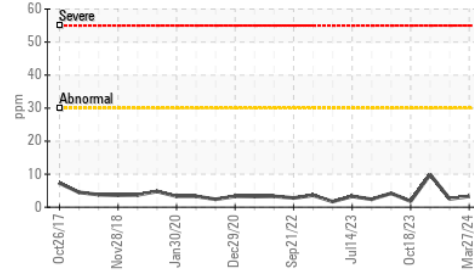


### Chromium (ppm)

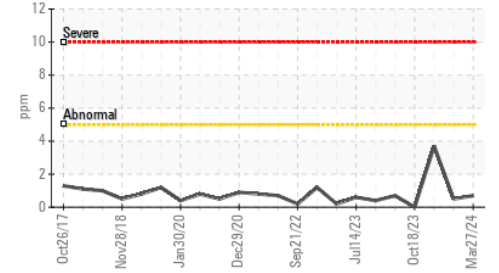


### Copper (ppm)

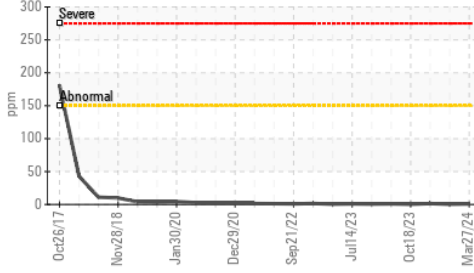


### Silicon (ppm)

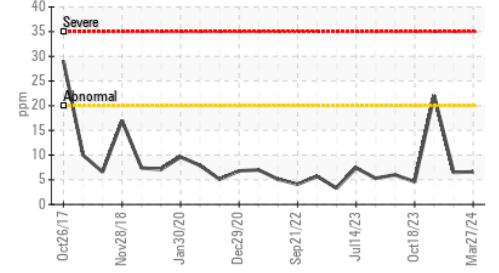

## ▲ Viscosity @ 100°C

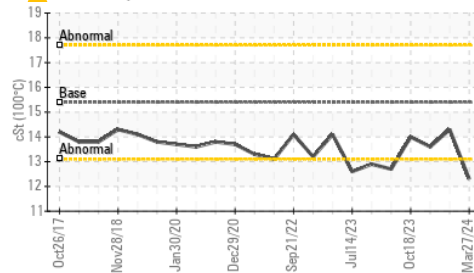

## ▲ Fuel Dilution

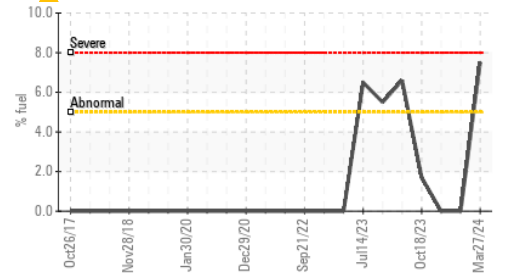

ISO 17025:2017  
Accredited  
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9

Sample No. : GFL0117919

Lab Number : 02625977

Unique Number : 5759109

Test Package : MOB 1 ( Additional Tests: FuelDilution, PercentFuel )

Received : 02 Apr 2024

Tested : 03 Apr 2024

Diagnosed : 03 Apr 2024 - Kevin Marson

GFL Environmental - 217 - Aurora

14131 BAYVIEW AVE, AURORA YARD

AURORA, ON

CA L4G 0K6

Contact: Mike Havens

MHavens@gflenv.com

T:

F: (905)713-2445

To discuss this sample report, contact Customer Service at 1-800-268-2131.

Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

Validity of results and interpretation are based on the sample and information as supplied.