


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

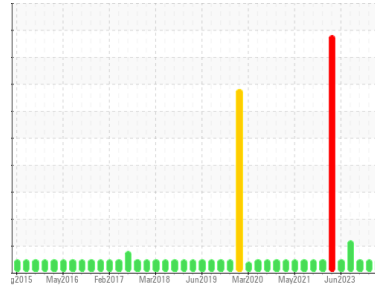

Area  
**Cranes**  
Machine Id  
**Crane - Mid - Hydraulic System (Reservoir) (S/N Sample Tag MA-04002-S4)**  
Component  
**Hydraulic System**  
Fluid  
**PETRO CANADA ATF DEXRON III/MERCON (800 LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PC</b>	PC	PC0076227
Sample Date	Client Info	<b>19 Mar 2024</b>	20 Jan 2024	04 Oct 2023
Machine Age	hrs	Client Info	<b>0</b>	0
Oil Age	hrs	Client Info	<b>0</b>	0
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.05	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
PQ	ASTM D8184*	<b>0</b>	0	0
Iron	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	<1
Chromium	ppm	ASTM D5185(m) >10	<b>0</b>	0
Nickel	ppm	ASTM D5185(m) >10	<b>0</b>	<1
Titanium	ppm	ASTM D5185(m)	<b>0</b>	0
Silver	ppm	ASTM D5185(m)	<b>0</b>	<1
Aluminum	ppm	ASTM D5185(m) >10	<b>0</b>	<1
Lead	ppm	ASTM D5185(m) >20	<b>0</b>	<1
Copper	ppm	ASTM D5185(m) >20	<b>1</b>	1
Tin	ppm	ASTM D5185(m) >10	<b>0</b>	0
Antimony	ppm	ASTM D5185(m)	<b>0</b>	0
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	0
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	0
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	0






## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 130	<b>93</b>	94
Barium	ppm	ASTM D5185(m) 1.0	<b>2</b>	2
Molybdenum	ppm	ASTM D5185(m) 0.0	<b>0</b>	0
Manganese	ppm	ASTM D5185(m)	<b>0</b>	0
Magnesium	ppm	ASTM D5185(m) 1.0	<b>2</b>	2
Calcium	ppm	ASTM D5185(m) 20	<b>64</b>	66
Phosphorus	ppm	ASTM D5185(m) 280	<b>235</b>	238
Zinc	ppm	ASTM D5185(m) 10	<b>46</b>	46
Sulfur	ppm	ASTM D5185(m) 440	<b>695</b>	759
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >15	<b>&lt;1</b>	2
Sodium	ppm	ASTM D5185(m)	<b>1</b>	1
Potassium	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	<1

# OIL ANALYSIS REPORT

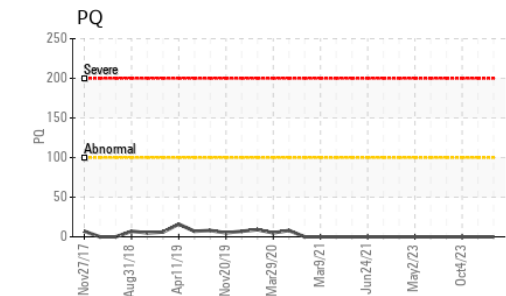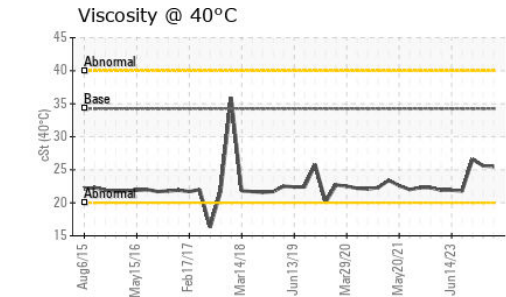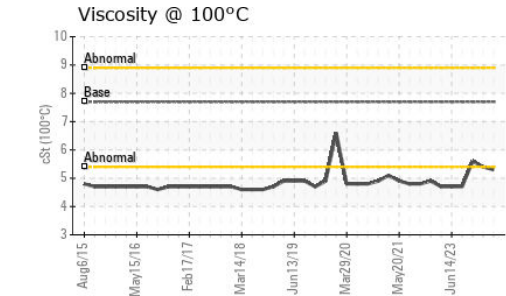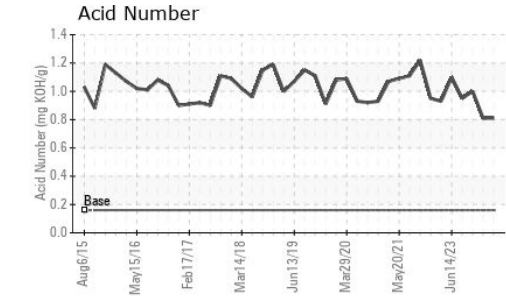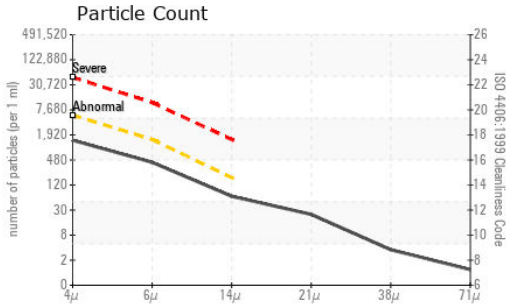

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC **Received** : 02 Apr 2024  
**Lab Number** : 02626063 **Tested** : 03 Apr 2024  
**Unique Number** : 5759195 **Diagnosed** : 03 Apr 2024 - Kevin Marson  
**Test Package** : MAR 2 ( Additional Tests: KV100, PQ, VI )

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	<b>1254</b>	1531	1979	
Particles >6µm	ASTM D7647	>1300	<b>371</b>	354	501	
Particles >14µm	ASTM D7647	>160	<b>57</b>	28	36	
Particles >21µm	ASTM D7647	>40	<b>21</b>	6	8	
Particles >38µm	ASTM D7647	>10	<b>3</b>	0	1	
Particles >71µm	ASTM D7647	>3	<b>1</b>	0	0	
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<b>17/16/13</b>	18/16/12	18/16/12	

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.16	<b>0.81</b>	0.81	1.00

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	VLITE	NONE
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE	VLITE
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	<b>VLITE</b>	NONE	NONE
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>0.05	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	34.26	<b>25.5</b>	25.6	26.6
Visc @ 100°C	cSt	ASTM D7279(m)	7.7	<b>5.3</b>	5.4	5.6
Viscosity Index (VI)	Scale	ASTM D2270*	210	<b>146</b>	152	156

SAMPLE IMAGES		method	limit/base	current	history1	history2
Color						
Bottom						
PrtFilter				no image	no image	no image