

Area

Cranes

Machine Id


Crane - Fwd Luffing Winch Gearbox (S/N Sample Tag MA-04003-S6)

Component

Gearbox

Fluid

PETRO CANADA GEARLUBE TOS 80W90 (40 LTR)

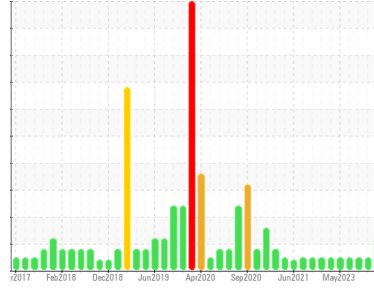

DIAGNOSIS

Recommendation

We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of particulates (2 to 100 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PC	PC0081073	PC0011837
Sample Date	Client Info			20 Mar 2024	24 Jan 2024	04 Oct 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed	Client Info			N/A	N/A	N/A
Sample Status				ABNORMAL	NORMAL	NORMAL






CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184*		0	0	0
Iron	ppm	ASTM D5185(m)	>150	4	5	3
Chromium	ppm	ASTM D5185(m)	>10	0	0	0
Nickel	ppm	ASTM D5185(m)	>10	0	<1	<1
Titanium	ppm	ASTM D5185(m)		<1	0	0
Silver	ppm	ASTM D5185(m)		0	<1	<1
Aluminum	ppm	ASTM D5185(m)	>5	0	<1	0
Lead	ppm	ASTM D5185(m)	>65	0	<1	<1
Copper	ppm	ASTM D5185(m)	>80	<1	2	<1
Tin	ppm	ASTM D5185(m)	>8	0	0	0
Antimony	ppm	ASTM D5185(m)	>5	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	240	245	229	251
Barium	ppm	ASTM D5185(m)	1	0	0	<1
Molybdenum	ppm	ASTM D5185(m)	0.0	0	0	0
Manganese	ppm	ASTM D5185(m)		0	0	0
Magnesium	ppm	ASTM D5185(m)	2	1	1	1
Calcium	ppm	ASTM D5185(m)	6	2	2	2
Phosphorus	ppm	ASTM D5185(m)	1000	968	943	925
Zinc	ppm	ASTM D5185(m)	3	8	36	18
Sulfur	ppm	ASTM D5185(m)	19400	17078	17012	16487
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>20	3	4	2
Sodium	ppm	ASTM D5185(m)		<1	1	<1
Potassium	ppm	ASTM D5185(m)	>20	<1	1	0

OIL ANALYSIS REPORT

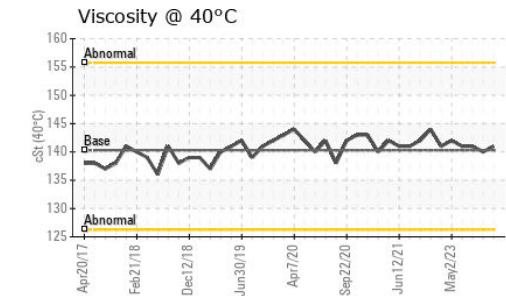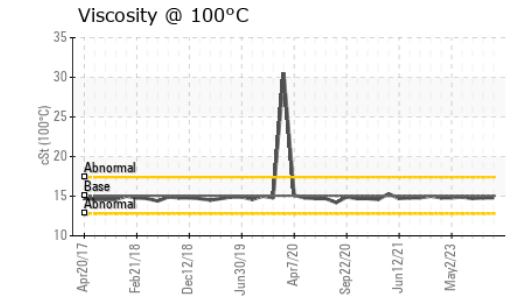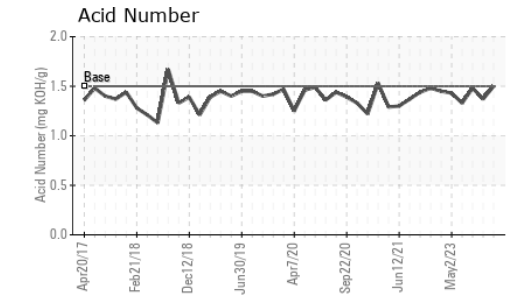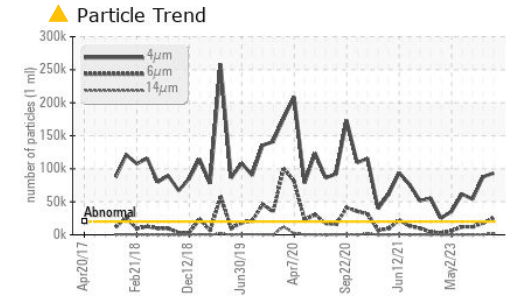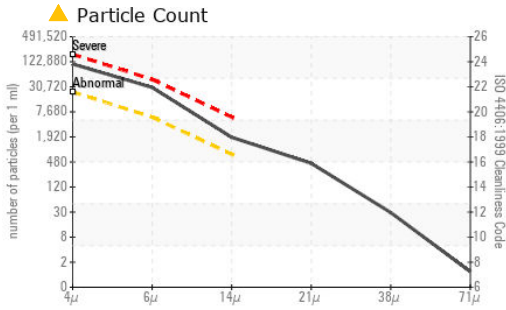

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC
Lab Number : 02626221
Unique Number : 5759353
Test Package : MAR 2 (Additional Tests: KV100, PQ, PrtCount, TAN Man, VI)

Received : 02 Apr 2024
Tested : 03 Apr 2024
Diagnosed : 03 Apr 2024 - Kevin Marson

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.


FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>20000	93318	87826	53888
Particles >6µm	ASTM D7647	>5000	25716	17554	12013
Particles >14µm	ASTM D7647	>640	▲ 1647	420	437
Particles >21µm	ASTM D7647	>160	▲ 392	78	98
Particles >38µm	ASTM D7647	>40	26	3	8
Particles >71µm	ASTM D7647	>10	1	1	4
Oil Cleanliness	ISO 4406 (c)	>21/19/16	▲ 24/22/18	24/21/16	23/21/16

FLUID DEGRADATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D974*	1.5	1.50	1.37	1.48

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar Visual*	NONE	NONE	NONE	NONE
Precipitate	scalar Visual*	NONE	NONE	NONE	NONE
Silt	scalar Visual*	NONE	NONE	NONE	NONE
Debris	scalar Visual*	NONE	VLITE	VLITE	NONE
Sand/Dirt	scalar Visual*	NONE	VLITE	NONE	NONE
Appearance	scalar Visual*	NORML	NORML	NORML	NORML
Odor	scalar Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar Visual*		NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt ASTM D7279(m)	140.3	141	140	141
Visc @ 100°C	cSt ASTM D7279(m)	15.05	14.8	14.8	14.7
Viscosity Index (VI)	Scale ASTM D2270*	109	104	105	103

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

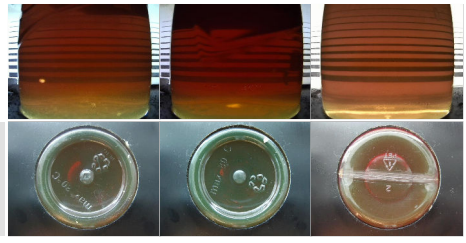

Suncor - Terra Nova Projects
 Scotia Centre, 235 Water Street
 St. John's, NL
 CA A1C 1B6
 Contact: Josh Hynes
 joshhynes@suncor.com
 T: (709)778-3575
 F: (709)724-2835