




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Machine Id
8409
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (--- GAL)

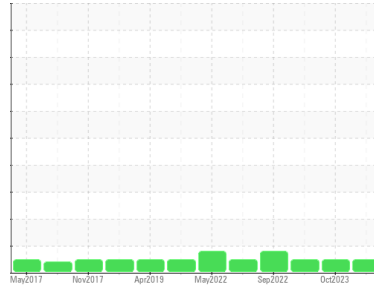

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0112547	GFL0093889	GFL0085963
Sample Date	Client Info	25 Mar 2024	15 Oct 2023	20 Jul 2023
Machine Age	hrs	15168	0	144694
Oil Age	hrs	0	0	0
Oil Changed	Client Info	Changed	N/A	N/A
Sample Status		NORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185(m) >80	24	28	9
Chromium	ppm ASTM D5185(m) >5	<1	<1	<1
Nickel	ppm ASTM D5185(m) >2	<1	<1	0
Titanium	ppm ASTM D5185(m)	0	0	0
Silver	ppm ASTM D5185(m) >3	0	<1	<1
Aluminum	ppm ASTM D5185(m) >30	5	3	2
Lead	ppm ASTM D5185(m) >30	0	<1	<1
Copper	ppm ASTM D5185(m) >150	1	2	<1
Tin	ppm ASTM D5185(m) >5	0	0	0
Antimony	ppm ASTM D5185(m)	0	0	0
Vanadium	ppm ASTM D5185(m)	0	0	0
Beryllium	ppm ASTM D5185(m)	0	0	0
Cadmium	ppm ASTM D5185(m)	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m) 2	4	8	3
Barium	ppm ASTM D5185(m) 0	0	<1	0
Molybdenum	ppm ASTM D5185(m) 50	58	62	57
Manganese	ppm ASTM D5185(m) 0	0	0	<1
Magnesium	ppm ASTM D5185(m) 950	938	948	955
Calcium	ppm ASTM D5185(m) 1050	1043	1093	1012
Phosphorus	ppm ASTM D5185(m) 995	957	985	1067
Zinc	ppm ASTM D5185(m) 1180	1154	1191	1165
Sulfur	ppm ASTM D5185(m) 2600	2388	2394	2519
Lithium	ppm ASTM D5185(m)	<1	<1	<1

CONTAMINANTS



method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >20	5	5	3
Sodium	ppm ASTM D5185(m)	5	7	2
Potassium	ppm ASTM D5185(m) >20	1	0	0

INFRA-RED

method	limit/base	current	history1	history2
Soot %	% ASTM D7844* >3	0.4	0.7	0.2
Nitration	Abs/cm ASTM D7624* >20	8.3	9.8	6.2
Sulfation	Abs.1mm ASTM D7415* >30	19.6	21.7	19.5



OIL ANALYSIS REPORT







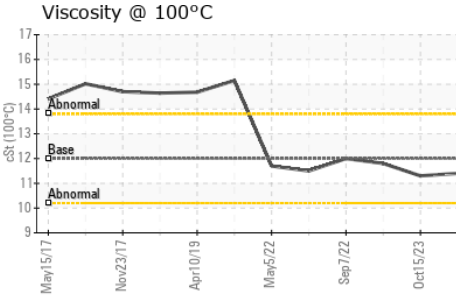
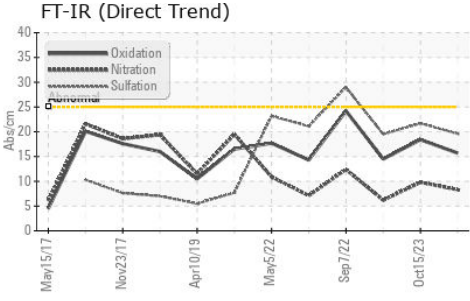


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	15.7	18.4	14.5

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	11.4	11.3	11.8

GRAPHS

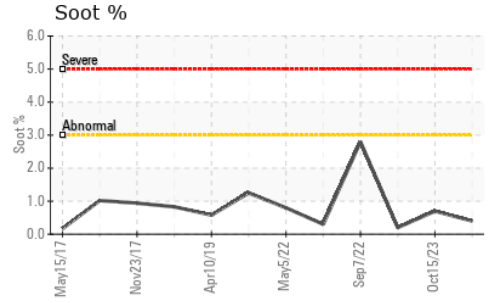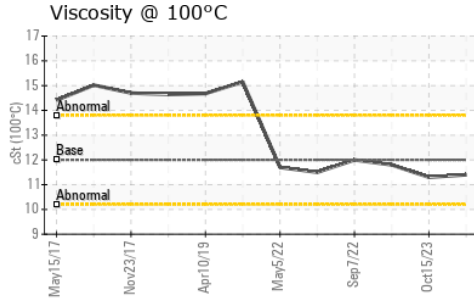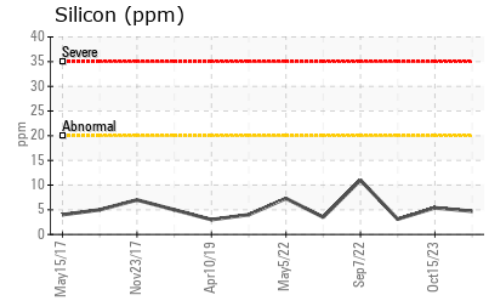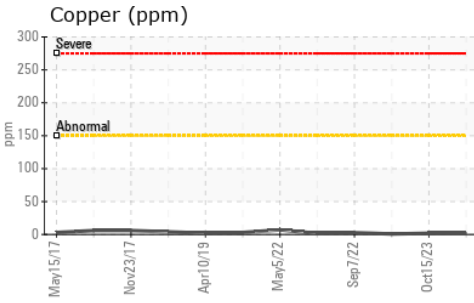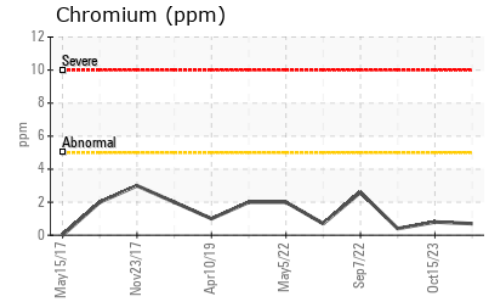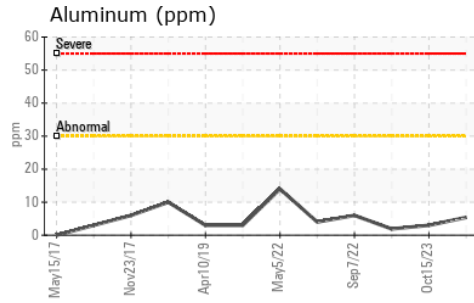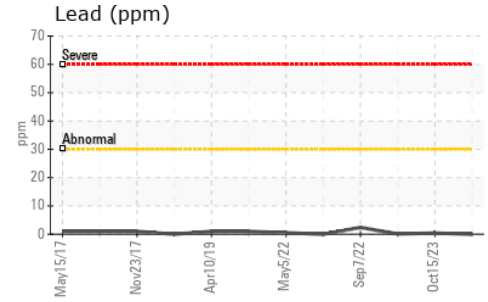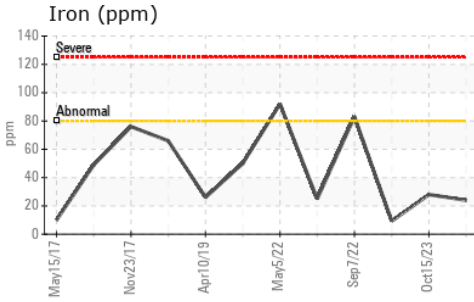

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0112547
Lab Number : **02626570**
Unique Number : 5759702
Test Package : MOB 1
Received : 04 Apr 2024
Tested : 04 Apr 2024
Diagnosed : 04 Apr 2024 - Wes Davis

GFL Environmental - 554 - Edmonton SW
 8409 -15th Street NW
 Edmonton, AB
 CA T6P 0B8
 Contact: Tim Greig
 tgreig@gflenv.com
 T: (780)231-0521
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.