


OIL ANALYSIS REPORT





DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

· GAL)				Apr2024		
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PC0087900		
Sample Date		Client Info		16 Apr 2024		
Machine Age	hrs	Client Info		18555		
Oil Age	hrs	Client Info		0		
Oil Changed	1110	Client Info		Changed		
Sample Status		Oliciti iiilo		NORMAL		
CONTAMINAT	ION	اد د ماد د در	limit/base			
Water	ION	method WC Method	>0.2	current	history1	history2
				NEG		
WEAR METAL	S	method	limit/base	current	history1	history2
PQ		ASTM D8184*		40		
Iron	ppm	ASTM D5185(m)	>1250	80		
Chromium	ppm	ASTM D5185(m)	>8	2		
Nickel	ppm	ASTM D5185(m)	>3	<1		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)	>15	<1		
Lead	ppm	ASTM D5185(m)	>25	0		
Copper	ppm	ASTM D5185(m)	>45	<1		
Tin	ppm	ASTM D5185(m)	>3	0		
Antimony	ppm	ASTM D5185(m)	>5	0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	50	32		
Barium	ppm	ASTM D5185(m)	15	0		
Molybdenum	ppm	ASTM D5185(m)	15	8		
Manganese	ppm	ASTM D5185(m)		<1		
Magnesium	ppm	ASTM D5185(m)	50	4		
Calcium	ppm	ASTM D5185(m)	50	4		
Phosphorus		ASTM D5185(m)	350	902		
Zinc	ppm	ASTM D5185(m)	100	7		
Sulfur	ppm	ASTM D5185(m)	12500	4637		
Lithium	ppm	ASTM D5185(m)	12300	<1		
			line it //e e e e			
CONTAMINAN	т5	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>100	5		
Sodium	ppm	ASTM D5185(m)		<1		
Potassium	ppm	ASTM D5185(m)	>20	0		
FLUID DEGRA	DATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.85	1.98		



OIL ANALYSIS REPORT

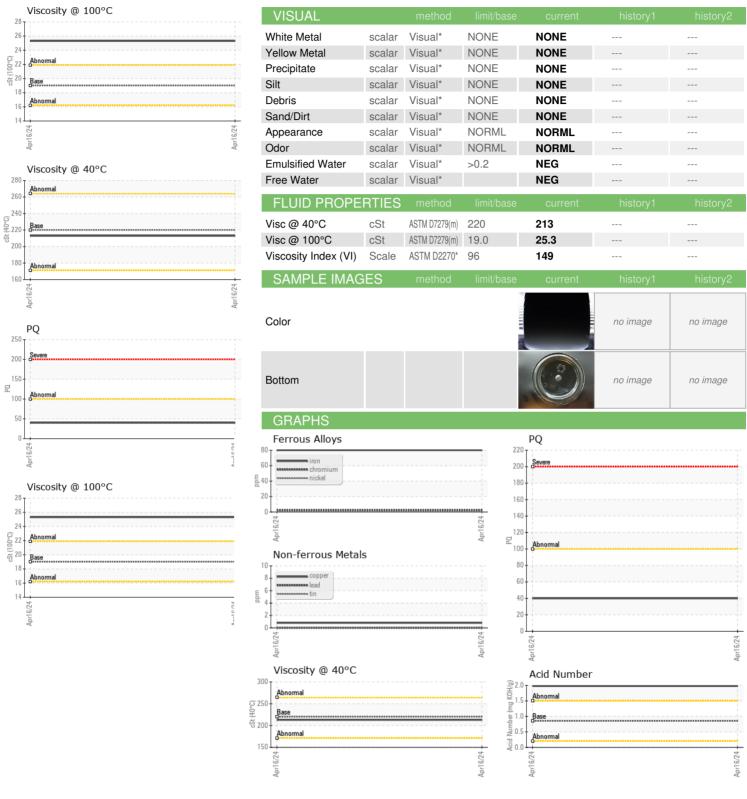





Laboratory Sample No.

: PC0087900 Lab Number : 02631062 Unique Number : 5772215

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Green Infrastructure and Partners Inc (GIPI) - 286 - Shoring & Foundations Received : 23 Apr 2024

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

Tested : 23 Apr 2024 Diagnosed

: 24 Apr 2024 - Kevin Marson Test Package : IND 2 (Additional Tests: KV100, TAN Man, VI)

To discuss this sample report, contact Customer Service at 1-800-268-2131.

CA L4A 2G8 Contact: Shannon Abbott sabbott@gipi.com T: (905)750-5900

151 Ram Forest Rd,

Stouffville, ON