




OIL ANALYSIS REPORT

Sample Rating Trend

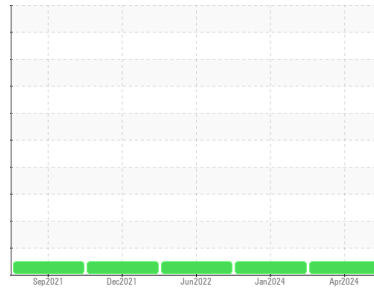

NORMAL



Machine Id

518002

Component

Diesel Engine

Fluid

PETRO CANADA DURON SHP 10W30 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0108212	GFL0047662	GFL0047680
Sample Date	Client Info		02 Apr 2024	20 Jan 2024	09 Jun 2022
Machine Age	hrs	Client Info	12674	12143	8226
Oil Age	hrs	Client Info	500	492	600
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >165	19	19	28
Chromium	ppm	ASTM D5185(m) >5	<1	<1	2
Nickel	ppm	ASTM D5185(m) >4	0	<1	<1
Titanium	ppm	ASTM D5185(m) >2	0	0	0
Silver	ppm	ASTM D5185(m) >2	0	0	0
Aluminum	ppm	ASTM D5185(m) >20	2	2	12
Lead	ppm	ASTM D5185(m) >150	2	3	6
Copper	ppm	ASTM D5185(m) >90	<1	<1	<1
Tin	ppm	ASTM D5185(m) >5	0	0	<1
Antimony	ppm	ASTM D5185(m)	0	0	0
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 2	1	2	21
Barium	ppm	ASTM D5185(m) 0	0	0	0
Molybdenum	ppm	ASTM D5185(m) 50	63	62	53
Manganese	ppm	ASTM D5185(m) 0	<1	0	<1
Magnesium	ppm	ASTM D5185(m) 950	1043	1007	896
Calcium	ppm	ASTM D5185(m) 1050	1140	1112	1277
Phosphorus	ppm	ASTM D5185(m) 995	1042	1041	813
Zinc	ppm	ASTM D5185(m) 1180	1270	1256	965
Sulfur	ppm	ASTM D5185(m) 2600	2488	2666	2008
Lithium	ppm	ASTM D5185(m)	<1	<1	<1

CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >35	2	4	9
Sodium	ppm	ASTM D5185(m)	2	2	6
Potassium	ppm	ASTM D5185(m) >20	1	2	25

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844* >7.5	0.3	0.3	0.3
Nitration	Abs/cm	ASTM D7624* >20	10.0	10.1	11.9
Sulfation	Abs/.1mm	ASTM D7415* >30	21.5	21.6	25.5




OIL ANALYSIS REPORT

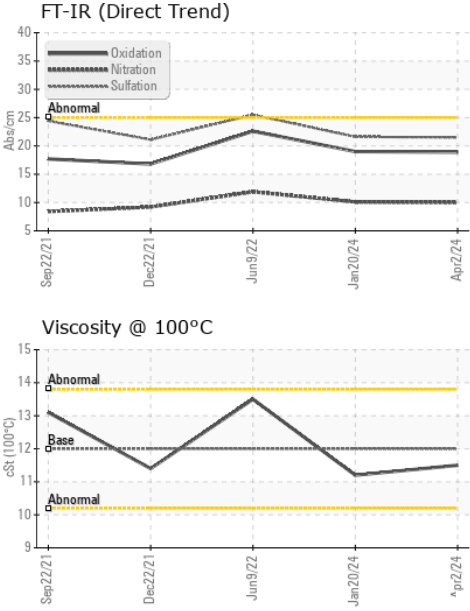

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	18.9	19.0	22.6
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	VLITE	---
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	11.5	11.2	13.5

GRAPHS

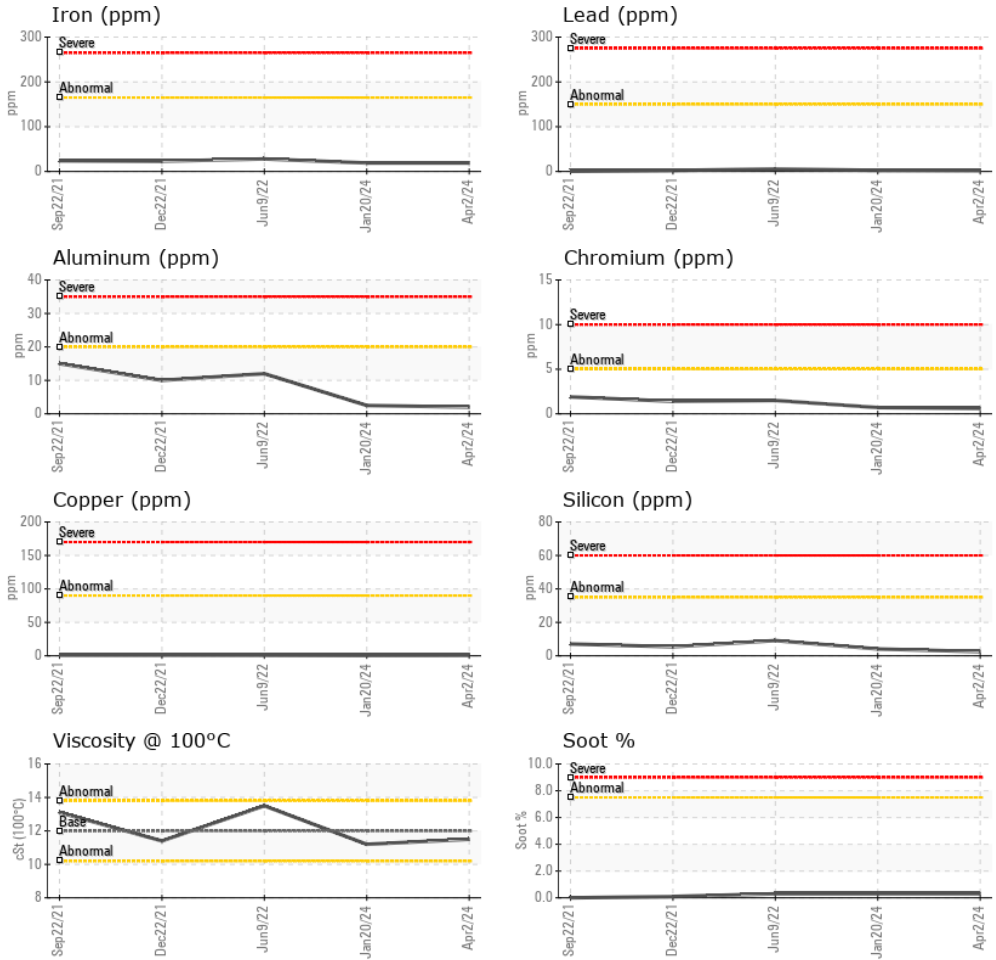

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **GFL Environmental - 355 - Saskatoon**
Sample No. : GFL0108212 **Received** : 24 Apr 2024 100 Cory Road
Lab Number : **02631098** **Tested** : 24 Apr 2024 Saskatoon, SK
Unique Number : 5772251 **Diagnosed** : 24 Apr 2024 - Wes Davis CA S7K 3J7
Test Package : MOB 1 (Additional Tests: Visual) Contact: Ryan Polichuk
 rpolichuk@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.