


PROBLEM SUMMARY

Machine Id
2
Component
Gearbox
Fluid
EP 220 (--- GAL)


Sample Rating Trend

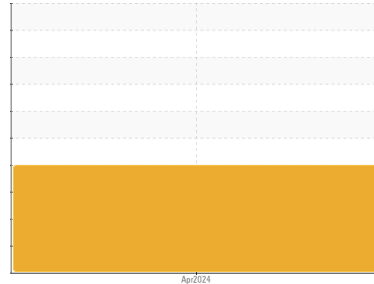

WATER



COMPONENT CONDITION SUMMARY

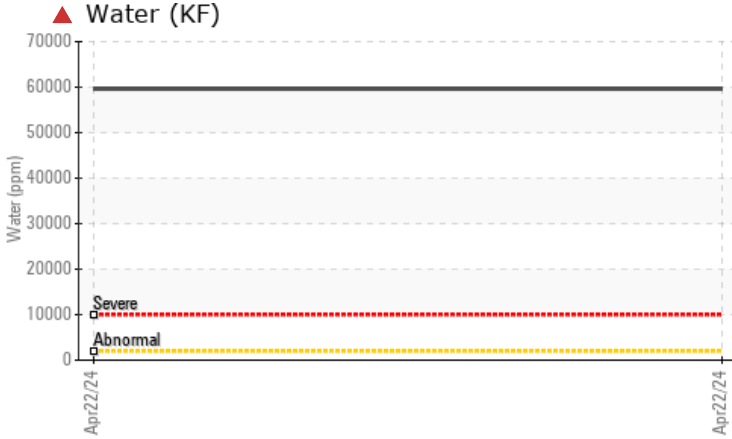

RECOMMENDATION

We advise that you check for the source of water entry. Check seals and/or filters for points of contaminant entry. We advise that you follow the water drain-off procedure for this component. We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. NOTE: There is too much water present in this sample to perform certain laboratory tests.

PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	---	---
Water	%	ASTM D6304*	>0.2	▲ 5.965	---	---
ppm Water	ppm	ASTM D6304*	>2000	▲ 59658	---	---
Appearance	scalar	Visual*	NORML	▲ MILKY	---	---
Emulsified Water	scalar	Visual*	>0.2	▲ .5%	---	---

Customer Id: LABSTJ
Sample No.: PC0081277
Lab Number: 02631408
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
Kevin Marson +1 (289)291-4644 x4644
Kevin.Marson@wearcheck.com

To change component or sample information:
Gloria Gonzalez +1 (289)291-4643 x4643
gloria.gonzalez@wearcheck.com


RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Water Drain-off	---	---	?	We advise that you follow the water drain-off procedure for this component.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Alert	---	---	?	NOTE: There is too much water present in this sample to perform certain laboratory tests.
Information Required	---	---	?	NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.
Check Water Access	---	---	?	We advise that you check for the source of water entry.
Check Seals	---	---	?	Check seals and/or filters for points of contaminant entry.

HISTORICAL DIAGNOSIS

OIL ANALYSIS REPORT

Sample Rating Trend

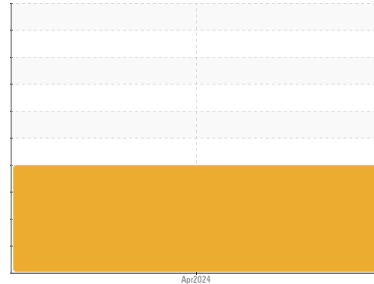

WATER



Machine Id
2
Component
Gearbox
Fluid
EP 220 (--- GAL)

DIAGNOSIS

▲ Recommendation

We advise that you check for the source of water entry. Check seals and/or filters for points of contaminant entry. We advise that you follow the water drain-off procedure for this component. We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. NOTE: There is too much water present in this sample to perform certain laboratory tests.

Wear

All component wear rates are normal.

▲ Contamination

There is a high concentration of water present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PC0081277	---	---
Sample Date	Client Info		22 Apr 2024	---	---
Machine Age	hrs	Client Info	0	---	---
Oil Age	hrs	Client Info	0	---	---
Oil Changed	Client Info		N/A	---	---
Sample Status			SEVERE	---	---

WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184*		0	---	---
Iron	ppm	ASTM D5185(m) >200	8	---	---
Chromium	ppm	ASTM D5185(m) >15	0	---	---
Nickel	ppm	ASTM D5185(m) >15	0	---	---
Titanium	ppm	ASTM D5185(m)	0	---	---
Silver	ppm	ASTM D5185(m)	0	---	---
Aluminum	ppm	ASTM D5185(m) >25	<1	---	---
Lead	ppm	ASTM D5185(m) >100	0	---	---
Copper	ppm	ASTM D5185(m) >200	5	---	---
Tin	ppm	ASTM D5185(m) >25	0	---	---
Antimony	ppm	ASTM D5185(m) >5	0	---	---
Vanadium	ppm	ASTM D5185(m)	0	---	---
Beryllium	ppm	ASTM D5185(m)	0	---	---
Cadmium	ppm	ASTM D5185(m)	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	24	---	---
Barium	ppm	ASTM D5185(m)	0	---	---
Molybdenum	ppm	ASTM D5185(m)	0	---	---
Manganese	ppm	ASTM D5185(m)	0	---	---
Magnesium	ppm	ASTM D5185(m)	<1	---	---
Calcium	ppm	ASTM D5185(m)	3	---	---
Phosphorus	ppm	ASTM D5185(m)	212	---	---
Zinc	ppm	ASTM D5185(m)	5	---	---
Sulfur	ppm	ASTM D5185(m)	5372	---	---
Lithium	ppm	ASTM D5185(m)	6	---	---






CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >50	9	---	---
Sodium	ppm	ASTM D5185(m)	41	---	---
Potassium	ppm	ASTM D5185(m) >20	2	---	---
Water	%	ASTM D6304* >0.2	▲ 5.965	---	---
ppm Water	ppm	ASTM D6304* >2000	▲ 59658	---	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.16	---	---

OIL ANALYSIS REPORT

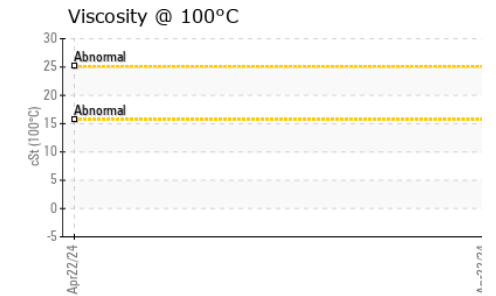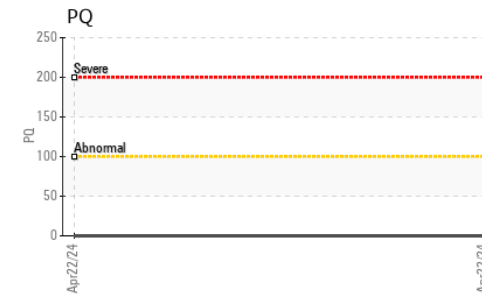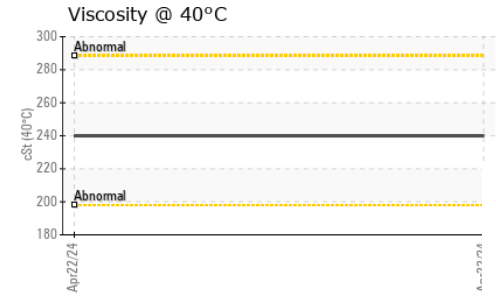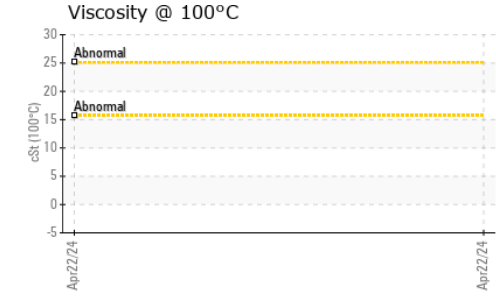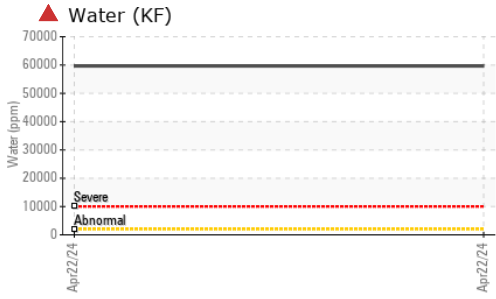






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	LIGHT	---
Appearance	scalar	Visual*	NORML	▲ MILKY	---
Odor	scalar	Visual*	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.2	▲ .5%	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	240	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image
Bottom				no image	no image

GRAPHS

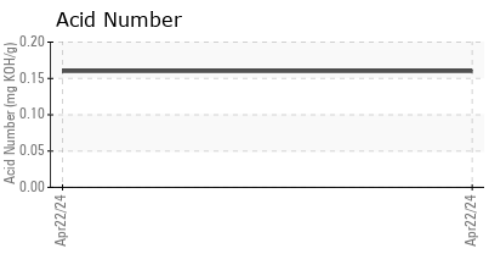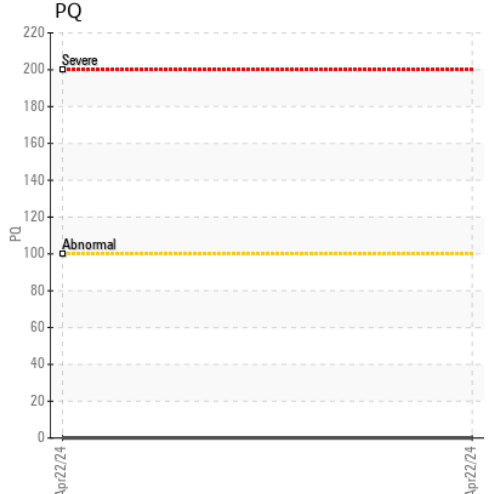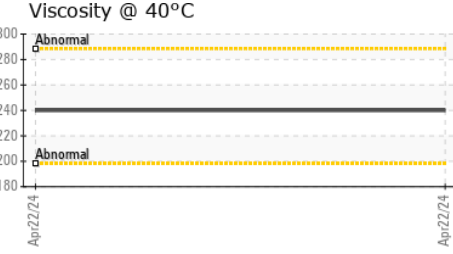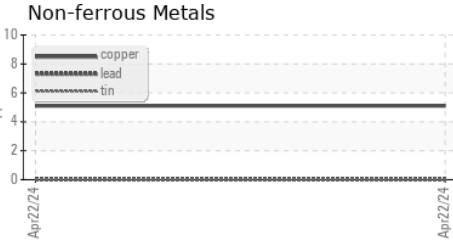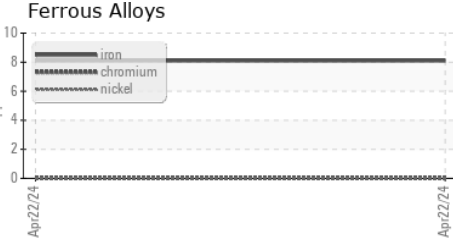

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0081277 **Received** : 25 Apr 2024
Lab Number : 02631408 **Tested** : 26 Apr 2024
Unique Number : 5772561 **Diagnosed** : 26 Apr 2024 - Kevin Marson
Test Package : IND 2 (Additional Tests: KF, KV100, VI)

Labatt - St. John's Brewery
 60 Leslie Street
 St John's, NL
 CA A1E 2V8
 Contact: Paul Bowering
 paul.bowering@labatt.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
 F: (709)579-2018