




OIL ANALYSIS REPORT

Sample Rating Trend

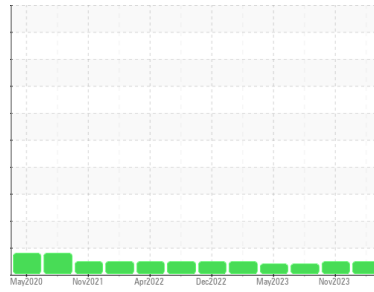

NORMAL



Machine Id
924002
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | GFL0113200 | GFL0097315 | GFL0053580 |
| Sample Date | Client Info | | 24 Apr 2024 | 16 Nov 2023 | 29 Sep 2023 |
| Machine Age | kms | Client Info | 0 | 0 | 0 |
| Oil Age | kms | Client Info | 21788 | 20971 | 0 |
| Oil Changed | Client Info | | N/A | N/A | N/A |
| Sample Status | | | NORMAL | NORMAL | ABNORMAL |

CONTAMINATION

| | method | limit/base | current | history1 | history2 |
|--------|-----------|------------|----------------|----------|----------|
| Fuel | WC Method | >3.0 | <1.0 | 1.1 | 1.3 |
| Water | WC Method | >0.2 | NEG | NEG | NEG |
| Glycol | WC Method | | NEG | NEG | NEG |

WEAR METALS

| | method | limit/base | current | history1 | history2 | |
|-----------|--------|---------------|---------|--------------|----------|----|
| Iron | ppm | ASTM D5185(m) | >120 | 8 | 10 | 22 |
| Chromium | ppm | ASTM D5185(m) | >20 | 0 | <1 | 2 |
| Nickel | ppm | ASTM D5185(m) | >5 | 0 | <1 | <1 |
| Titanium | ppm | ASTM D5185(m) | >2 | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185(m) | >2 | <1 | <1 | <1 |
| Aluminum | ppm | ASTM D5185(m) | >20 | 2 | 4 | 13 |
| Lead | ppm | ASTM D5185(m) | >40 | 0 | <1 | 1 |
| Copper | ppm | ASTM D5185(m) | >330 | <1 | 1 | 3 |
| Tin | ppm | ASTM D5185(m) | >15 | 0 | 0 | <1 |
| Antimony | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Vanadium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Beryllium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |

ADDITIVES

| | method | limit/base | current | history1 | history2 | |
|------------|--------|---------------|---------|--------------|----------|------|
| Boron | ppm | ASTM D5185(m) | 0 | 17 | 118 | 22 |
| Barium | ppm | ASTM D5185(m) | 0 | 0 | <1 | <1 |
| Molybdenum | ppm | ASTM D5185(m) | 60 | 63 | 6 | 39 |
| Manganese | ppm | ASTM D5185(m) | 0 | 0 | 0 | 0 |
| Magnesium | ppm | ASTM D5185(m) | 1010 | 861 | 55 | 470 |
| Calcium | ppm | ASTM D5185(m) | 1070 | 1069 | 2120 | 1769 |
| Phosphorus | ppm | ASTM D5185(m) | 1150 | 932 | 878 | 722 |
| Zinc | ppm | ASTM D5185(m) | 1270 | 1102 | 1098 | 899 |
| Sulfur | ppm | ASTM D5185(m) | 2060 | 2414 | 2678 | 1968 |
| Lithium | ppm | ASTM D5185(m) | | <1 | <1 | <1 |

CONTAMINANTS



| | method | limit/base | current | history1 | history2 | |
|-----------|--------|---------------|---------|--------------|----------|----|
| Silicon | ppm | ASTM D5185(m) | >25 | 5 | 5 | 7 |
| Sodium | ppm | ASTM D5185(m) | | 2 | 4 | 4 |
| Potassium | ppm | ASTM D5185(m) | >20 | <1 | 4 | <1 |

INFRA-RED

| | method | limit/base | current | history1 | history2 | |
|-----------|----------|-------------|---------|-------------|----------|------|
| Soot % | % | ASTM D7844* | >4 | 0.9 | 0.7 | 1.7 |
| Nitration | Abs/cm | ASTM D7624* | >20 | 7.3 | 8.7 | 11.3 |
| Sulfation | Abs./1mm | ASTM D7415* | >30 | 19.5 | 22.6 | 25.4 |



OIL ANALYSIS REPORT







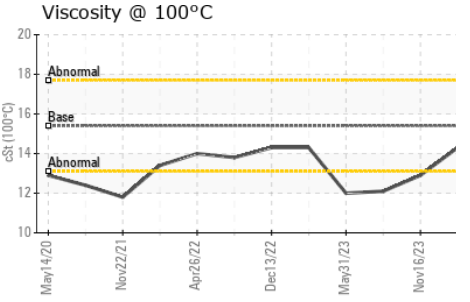
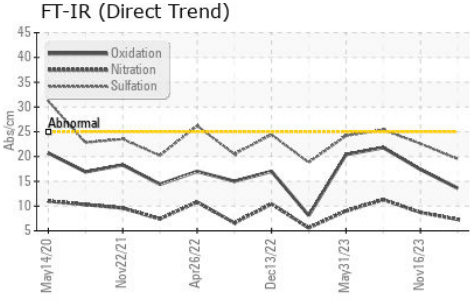


| FLUID DEGRADATION | | method | limit/base | current | history1 | history2 |
|-------------------|----------|-------------|------------|-------------|----------|----------|
| Oxidation | Abs./1mm | ASTM D7414* | >25 | 13.6 | 17.4 | 21.8 |

| VISUAL | | method | limit/base | current | history1 | history2 |
|------------------|--------|---------|------------|------------|----------|----------|
| Emulsified Water | scalar | Visual* | >0.2 | NEG | NEG | NEG |
| Free Water | scalar | Visual* | | NEG | NEG | NEG |

| FLUID PROPERTIES | | method | limit/base | current | history1 | history2 |
|------------------|-----|---------------|------------|-------------|----------|----------|
| Visc @ 100°C | cSt | ASTM D7279(m) | 15.4 | 14.3 | 12.9 | ▲ 12.1 |

GRAPHS

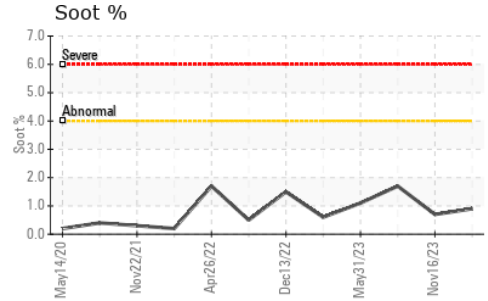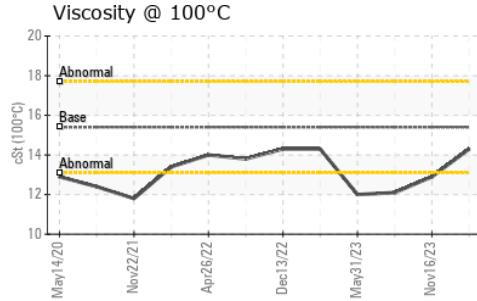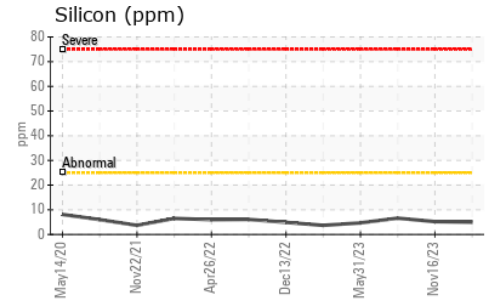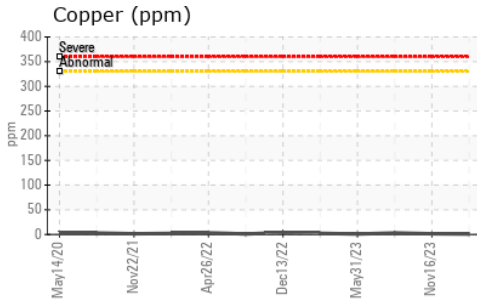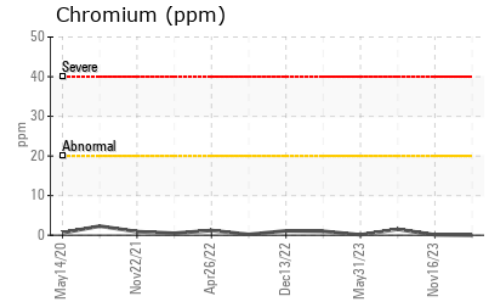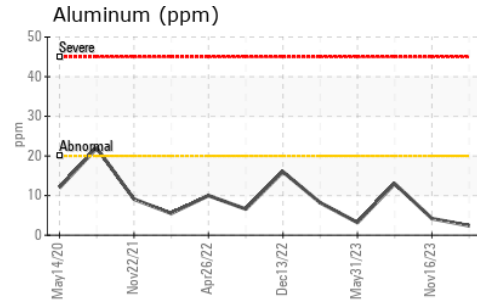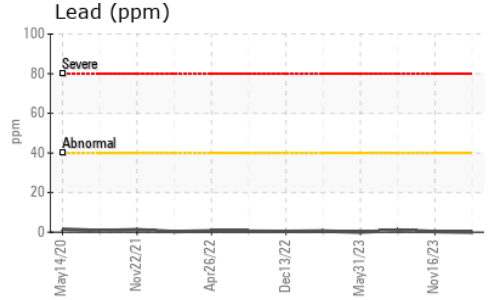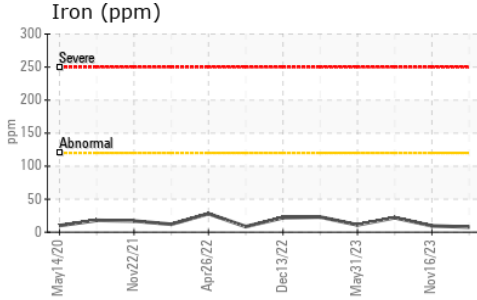

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0113200
Lab Number : 02631543
Unique Number : 5772696
Test Package : MOB 1
Received : 26 Apr 2024
Tested : 26 Apr 2024
Diagnosed : 26 Apr 2024 - Wes Davis

GFL Environmental - 246 - Windsor
 2700 Deziel Dr
 Windsor, ON
 CA N8W 5H8
 Contact: Dave Varga
 dvarga@gflenv.com
 T: (519)944-8009
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.