




# OIL ANALYSIS REPORT



Machine Id  
**OR896**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (--- GAL)**

### Sample Rating Trend

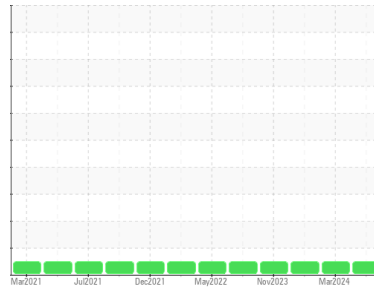

**NORMAL**



### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The condition of the oil is acceptable for the time in service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0112561</b>	GFL0102611	GFL0102623
Sample Date	Client Info		<b>17 Apr 2024</b>	04 Mar 2024	25 Jan 2024
Machine Age	hrs	Client Info	<b>1261253</b>	22143	21724
Oil Age	hrs	Client Info	<b>0</b>	469	500
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

### CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >100	<b>5</b>	16	22
Chromium	ppm	ASTM D5185(m) >20	<b>0</b>	0	<1
Nickel	ppm	ASTM D5185(m) >2	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185(m) >2	<b>0</b>	0	0
Silver	ppm	ASTM D5185(m) >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m) >25	<b>&lt;1</b>	1	2
Lead	ppm	ASTM D5185(m) >40	<b>0</b>	0	<1
Copper	ppm	ASTM D5185(m) >330	<b>&lt;1</b>	1	2
Tin	ppm	ASTM D5185(m) >15	<b>0</b>	0	0
Antimony	ppm	ASTM D5185(m)	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	0	0

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 2	<b>3</b>	<1	2
Barium	ppm	ASTM D5185(m) 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m) 50	<b>59</b>	60	60
Manganese	ppm	ASTM D5185(m) 0	<b>0</b>	0	0
Magnesium	ppm	ASTM D5185(m) 950	<b>946</b>	947	935
Calcium	ppm	ASTM D5185(m) 1050	<b>1036</b>	1043	1069
Phosphorus	ppm	ASTM D5185(m) 995	<b>978</b>	959	972
Zinc	ppm	ASTM D5185(m) 1180	<b>1143</b>	1146	1151
Sulfur	ppm	ASTM D5185(m) 2600	<b>2554</b>	2432	2635
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	<1

### CONTAMINANTS



	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >25	<b>1</b>	1	3
Sodium	ppm	ASTM D5185(m)	<b>20</b>	44	41
Potassium	ppm	ASTM D5185(m) >20	<b>2</b>	4	4

### INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844* >3	<b>0.2</b>	0.6	0.9
Nitration	Abs/cm	ASTM D7624* >20	<b>4.7</b>	5.7	6.4
Sulfation	Abs/.1mm	ASTM D7415* >30	<b>18.1</b>	18.5	19.4



# OIL ANALYSIS REPORT







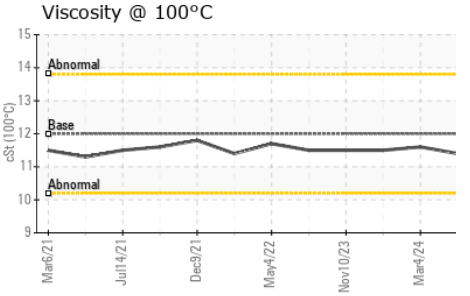
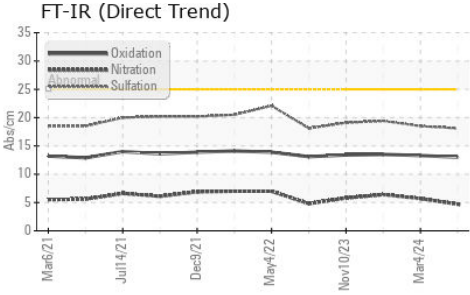


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	<b>13.0</b>	13.3	13.5

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	<b>11.4</b>	11.6	11.5

## GRAPHS

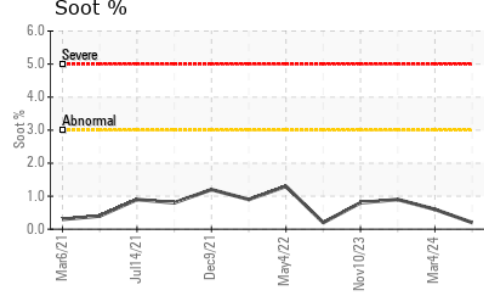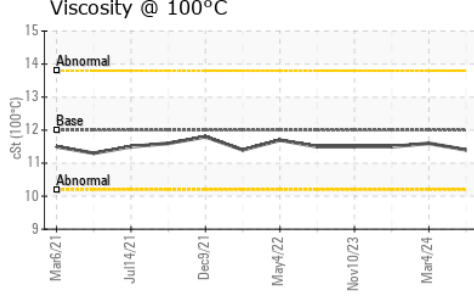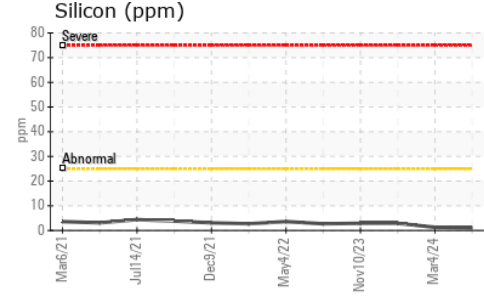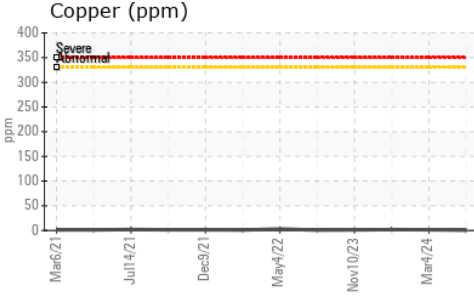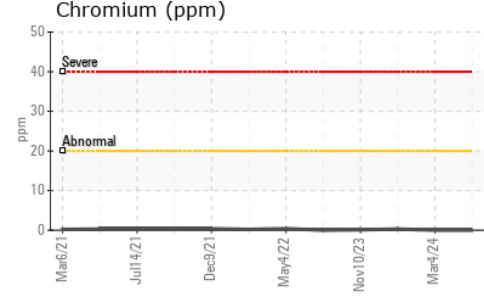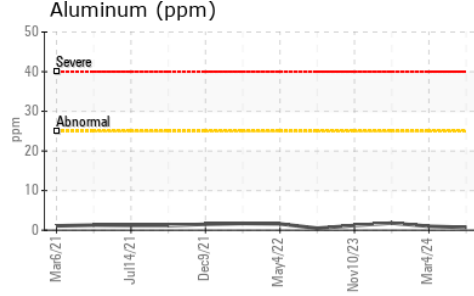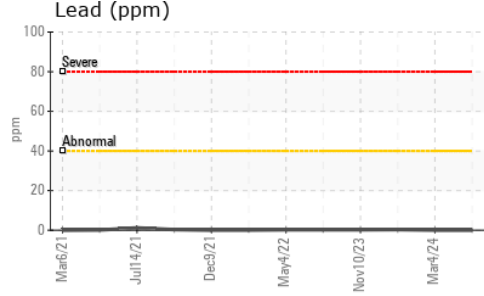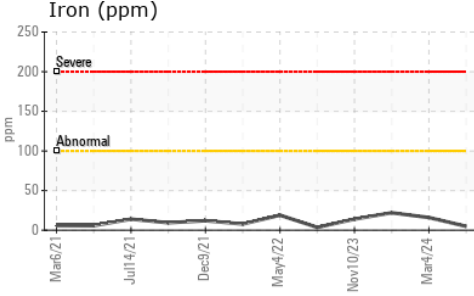

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **GFL Environmental - 554 - Edmonton SW**  
**Sample No.** : GFL0112561 **Received** : 26 Apr 2024 **8409 -15th Street NW**  
**Lab Number** : **02631566** **Tested** : 26 Apr 2024 **Edmonton, AB**  
**Unique Number** : 5772719 **Diagnosed** : 26 Apr 2024 - Wes Davis **CA T6P 0B8**  
**Test Package** : MOB 1 **Contact:** Tim Greig **tgreg@gflenv.com**

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.