

Area

**Turret [450296480]**

Machine Id


**Reservoir Tank Heat Transfer Fluid (WH-167804) (S/N Sample Tag: TB-16601 WH-167804)**

Component

**Heat Transfer Fluid**

Fluid

**PETRO CANADA TURBOFLO EP 46 (800 LTR)**

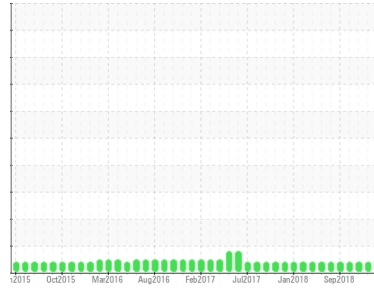

**DIAGNOSIS**

**Recommendation**

Resample at the next service interval to monitor. LUBE360 Oil Diagnostics recommends using HTTFL sample kits for heat transfer fluids. Please contact us at 1-800-268-2131 and provide a purchase order for \$245 + HST in order to conduct additional testing (boiling points @ 10%, 50%, and 90%, percent boiling < 335°C, and solids) to determine the suitability for continued use. Please contact your representative for information regarding the proper sampling kits for your service.

**Wear**

All component wear rates are normal.

**Contamination**

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

**Fluid Condition**

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

**SAMPLE INFORMATION** method limit/base current history1 history2

Sample Number	Client Info		<b>PC0080349</b>	PC0006472	PC412524
Sample Date	Client Info		<b>09 Apr 2024</b>	11 Apr 2019	28 Jan 2019
Machine Age	hrs	Client Info	<b>0</b>	0	0
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed		Client Info	<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	ATTENTION	ATTENTION

**CONTAMINATION** method limit/base current history1 history2

Water	WC Method	>0.0601	<b>NEG</b>	NEG	NEG
-------	-----------	---------	------------	-----	-----

**WEAR METALS** method limit/base current history1 history2

Iron	ppm	ASTM D5185(m)	>200	<b>0</b>	0	0
Chromium	ppm	ASTM D5185(m)	>21	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m)	>21	<b>0</b>	0	0
Titanium	ppm	ASTM D5185(m)	>21	<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>21	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>21	<b>0</b>	0	0
Lead	ppm	ASTM D5185(m)	>21	<b>0</b>	0	<1
Copper	ppm	ASTM D5185(m)	>21	<b>0</b>	<1	<1
Tin	ppm	ASTM D5185(m)	>21	<b>0</b>	0	0
Antimony	ppm	ASTM D5185(m)	>21	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	<1	<1

**ADDITIVES** method limit/base current history1 history2

Boron	ppm	ASTM D5185(m)		<b>0</b>	<1	0
Barium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)		<b>0</b>	0	0
Manganese	ppm	ASTM D5185(m)		<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185(m)		<b>0</b>	<1	<1
Calcium	ppm	ASTM D5185(m)		<b>0</b>	<1	<1
Phosphorus	ppm	ASTM D5185(m)	280	<b>266</b>	240	231
Zinc	ppm	ASTM D5185(m)	0.0	<b>1</b>	2	2
Sulfur	ppm	ASTM D5185(m)		<b>692</b>	593	563
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	0	0





**CONTAMINANTS** method limit/base current history1 history2

Silicon	ppm	ASTM D5185(m)	>25	<b>0</b>	<1	<1
Sodium	ppm	ASTM D5185(m)	>21	<b>&lt;1</b>	0	0
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	0	<1

**FLUID CLEANLINESS** method limit/base current history1 history2

Particles >4µm	ASTM D7647	>1300	<b>441</b>	● 1922	● 1761
Particles >6µm	ASTM D7647	>320	<b>132</b>	99	143
Particles >14µm	ASTM D7647	>40	<b>17</b>	2	11
Particles >21µm	ASTM D7647	>10	<b>8</b>	0	5
Particles >38µm	ASTM D7647	>3	<b>1</b>	0	0
Particles >71µm	ASTM D7647	>3	<b>0</b>	0	0
Oil Cleanliness	ISO 4406 (c)	>17/15/12	<b>16/14/11</b>	● 18/14/9	● 18/14/11

# OIL ANALYSIS REPORT

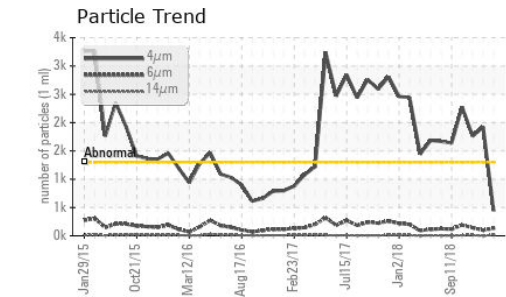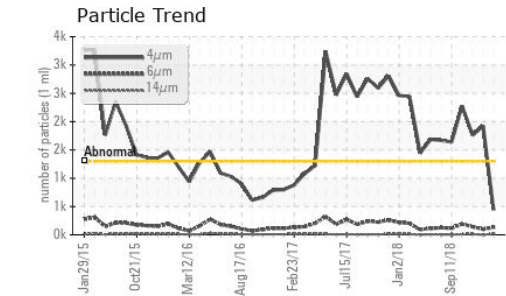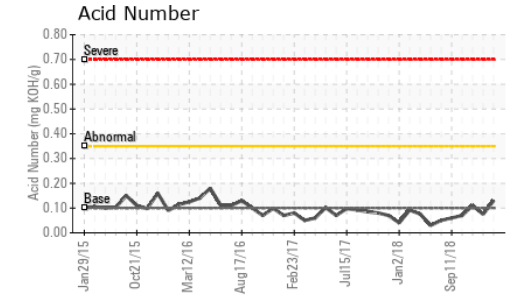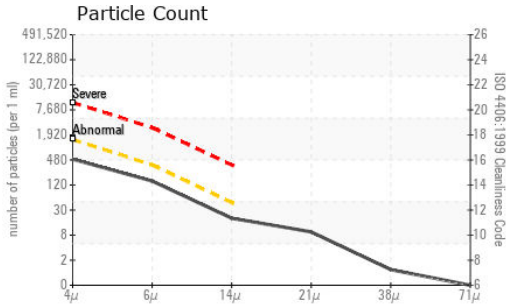

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	.10	<b>0.13</b>	0.075	0.111


VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>0.0601	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	46.37	<b>45.7</b>	45.2	45.4

## SAMPLE IMAGES



## GRAPHS

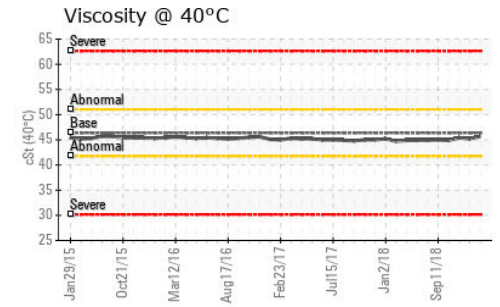

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0080349 **Received** : 26 Apr 2024  
**Lab Number** : **02631635** **Tested** : 29 Apr 2024  
**Unique Number** : 5772788 **Diagnosed** : 29 Apr 2024 - Kevin Marson  
**Test Package** : MAR 2 ( Additional Tests: PrtCount, TAN Man )

**Suncor - Terra Nova Projects**  
 Scotia Centre, 235 Water Street  
 St. John's, NL  
 CA A1C 1B6  
 Contact: Josh Hynes  
 joshynes@suncor.com  
 T: (709)778-3575  
 F: (709)724-2835

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.