

OIL ANALYSIS REPORT

Area Aft Machinery Space [450296544]

Thruster Aft Starboard - Lubrication System (S/N Sample Tag CL-06003-S1)

Sealing System

Fluid PETRO CANADA ENERGOL GR-XP ISO 150 (5000 LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using MAR 3 test kits, this testkit includes Analytical Ferrography which provides a detailed morphological analysis of wear particles present in the fluid.

Wear


Component wear rates appear to be normal (unconfirmed).

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.






NORMAL


| SAMPLE INFOR | MATION | method | limit/base | current | history1 | history2 |
|---|---|---|---|---|---|--|
| Sample Number | | Client Info | | PC | | |
| Sample Date | | Client Info | | 30 Mar 2024 | | |
| Machine Age | hrs | Client Info | | 0 | | |
| Oil Age | hrs | Client Info | | 0 | | |
| Oil Changed | | Client Info | | N/A | | |
| Sample Status | | | | NORMAL | | |
| CONTAMINAT | ION | method | limit/base | current | history1 | history2 |
| Water | | WC Method | | NEG | | |
| WEAR METAL | S | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185(m) | >100 | 1 | | |
| Chromium | ppm | ASTM D5185(m) | >3 | 0 | | |
| Nickel | ppm | ASTM D5185(m) | >8 | 0 | | |
| Titanium | ppm | ASTM D5185(m) | | 0 | | |
| Silver | ppm | ASTM D5185(m) | | 0 | | |
| Aluminum | ppm | ASTM D5185(m) | >3 | 0 | | |
| Lead | ppm | ASTM D5185(m) | | 0 | | |
| Copper | ppm | ASTM D5185(m) | >3 | 0 | | |
| Tin | ppm | ASTM D5185(m) | | 0 | | |
| Antimony | ppm | ASTM D5185(m) | | 0 | | |
| Vanadium | ppm | ASTM D5185(m) | | 0 | | |
| Beryllium | ppm | ASTM D5185(m) | | 0 | | |
| Cadmium | ppm | ASTM D5185(m) | | 0 | | |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | | | | 2 | | |
| Boron | ppm | ASTM D5185(m) | | 2 | | |
| Barium | ppm ppm | ASTM D5185(m) ASTM D5185(m) | | 2 <1 | | |
| | | . / | | | | |
| Barium | ppm | ASTM D5185(m) | | <1 | | |
| Barium Molybdenum | ppm ppm | ASTM D5185(m) ASTM D5185(m) | | <1 0 | | |
| Barium Molybdenum Manganese | ppm ppm ppm | ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) | | <1 0 0 | | |
| Barium Molybdenum Manganese Magnesium | ppm ppm ppm ppm | ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) | | <1 0 0 <1 | | |
| Barium Molybdenum Manganese Magnesium Calcium | ppm ppm ppm ppm ppm | ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) | | <1 0 0 <1 2 | | |
| Barium Molybdenum Manganese Magnesium Calcium Phosphorus | ppm ppm ppm ppm ppm ppm | ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) | | <1 0 0 <1 2 261 | | |
| Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc | ppm ppm ppm ppm ppm ppm | ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) | | <1 0 0 <1 2 261 4 | | |
| Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur | ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) | limit/base | <1 0 <1 2 261 4 10541 | | |
| Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium | ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) | limit/base | <1 0 ((1) 2 261 4 10541 <1 | | |
| Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINAN | ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) | | <1 0 0 <1 2 261 4 10541 <1 current | history1 | history2 |
| Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINAN Silicon | ppm ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) | >25 | <1 0 0 <1 2 261 4 10541 <1 current 0 | history1 | history2 |
| Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINAN Silicon Sodium | ppm ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185(m) ASTM D5185(m) | >25 | <1 0 0 <1 2 261 4 10541 <1 current 0 0 | history1 | history2 |
| Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINAN Silicon Sodium Potassium | ppm ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185(m) ASTM D5185(m) | >25 >20 | <1 0 0 <1 2 261 4 10541 <1 current 0 0 0 <1 | history1 | history2 |
| Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINAN Silicon Sodium Potassium FLUID CLEAN | ppm ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185(m) ASTM D5185(m) | >25 >20 limit/base >5000 | <1 0 0 <1 2 261 4 10541 <1 current 0 0 <1 current | history1 history1 | history2 history2 |
| Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINAN Silicon Sodium Potassium FLUID CLEAN Particles >4µm | ppm ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185(m) ASTM D5185(m) | >25 >20 limit/base >5000 | <1 0 0 <1 2 261 4 10541 <1 current 0 0 <1 current 409 | history1 history1 | history2 history2 |
| Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINAN Silicon Sodium Potassium FLUID CLEAN Particles >4µm Particles >6µm Particles >14µm | ppm ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185(m) ASTM D5185(m) | >25 >20 limit/base >5000 >1300 >160 | <1 0 0 <1 2 261 4 10541 <1 current 0 0 0 <1 current 409 101 | history1 history1 | history2 history2 history2 |
| Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINAN Silicon Sodium Potassium FLUID CLEAN Particles >6µm | ppm ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185(m) ASTM D7647 ASTM D7647 ASTM D7647 | >25 >20 limit/base >5000 >1300 >160 | <1 0 0 <1 2 261 4 10541 <1 current 0 0 0 <1 current 409 101 6 | history1 history1 | history2 history2 |
| Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINAN Silicon Sodium Potassium FLUID CLEAN Particles >4µm Particles >14µm Particles >21µm | ppm ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185(m) ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 | >25 >20 limit/base >5000 >1300 >160 >40 >10 | <1 0 0 <1 2 261 4 10541 <1 current 0 0 0 <1 current 409 101 6 1 | history1 history1 | history2 history2 |


Contact/Location: Josh Hynes - TERHAM Page 1 of 2

Sample Rating Trend





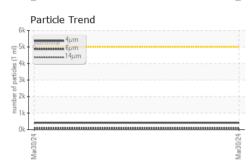

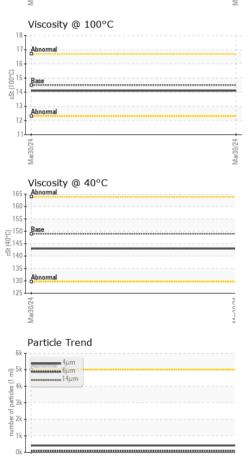

Mar30/24

OIL ANALYSIS REPORT

| | FLUID DEGRA | DATION | method | limit/base | current | history1 | history2 |
|-----------|----------------------|-----------|----------------|---|----------------|---|-------------------|
| | Acid Number (AN) | mg KOH/g | ASTM D974* | 0.9 | 0.52 | | |
| | VISUAL | | method | limit/base | current | history1 | history2 |
| | White Metal | scalar | Visual* | NONE | NONE | | |
| | Yellow Metal | scalar | Visual* | NONE | NONE | | |
| | Precipitate | scalar | Visual* | NONE | NONE | | |
| | Silt | scalar | Visual* | NONE | NONE | | |
| Mar30/24 | Debris | scalar | Visual* | NONE | NONE | | |
| | Sand/Dirt | scalar | Visual* | NONE | NONE | | |
| | Appearance | scalar | Visual* | NORML | NORML | | |
| | Odor | scalar | Visual* | NORML | NORML | | |
| | Emulsified Water | scalar | Visual* | | NEG | | |
| | Free Water | scalar | Visual* | | NEG | | |
| | FLUID PROPE | RTIES | method | limit/base | current | history1 | history2 |
| | Visc @ 40°C | cSt | ASTM D7279(m) | 149 | 143 | | |
| 24 | Visc @ 100°C | cSt | ASTM D7279(m) | 14.5 | 14.1 | | |
| Mar30/24 | Viscosity Index (VI) | Scale | ASTM D2270* | | 95 | | |
| | SAMPLE IMAG | GES | method | limit/base | current | history1 | history2 |
| | Color | | | | | no image | no image |
| Mai30/24 | Bottom | | | | | no image | no image |
| Marc | GRAPHS | | | | | | |
| | Ferrous Alloys | | | 401 52 | Particle Count | - | 2 |
| | 10 iron | | | 491,52 | | | 2 |
| | E. 5 - nickel | | | 122,880 | Severe | | -2 |
| | 0 | **** | | 30,72 | | | -2 |
| | Mar30/24 | | | s0/2 | Abnormal | | +2 |
| | Mar | | | W say | | ••••••••••••••••••••••••••••••••••••••• | -20 -18 -16 |
| | Non-ferrous Metal | S | | ojture d | | | -14 |
| 100 | copper | | | 121 raquine 31 | | | -1 |
| VC/UC~~₽₩ | E. 5 - tin | | | | | | -1 |
| | 0 | | | | 1+ | | -1 |
| | Mar30/24 | | | Mar30/24 | - | | -8 |
| | | | | Mar N | 4μ 6μ | 14µ 21µ | 38µ 71µ |
| | Viscosity @ 40°C | | | (B/H | Acid Number | | |
| | Abnormal | | | 0 I.U | Base | | |
| | 중 140 - Abnormal | | | 늘 0.50 | + | | |
| | Abnormal | | | 0.01(g) 90.01 (mg KOH/g) 10.02 (mg KOH/g) | | | |
| 5 | | | | Acid | 0/24 | | |
| در ۱۵۰۰ ا | Mar30/24 | | | Mar30/24 | Mar30/24 | | |
| al. | | 5 Annlehy | / Line, Burlin | gton, ON L7 | _ 5H9 | Suncor - Terra | Nova Proiec |

Validity of results and interpretation are based on the sample and information as supplied. Report Id: TERHAM [WCAMIS] 02631767 (Generated: 04/29/2024 11:28:05) Rev: 1

Contact/Location: Josh Hynes - TERHAM

Page 2 of 2

F: (709)724-2835