


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Area  
[450328977]  
Machine Id  
**CG-71001B**  
Component  
**Unknown Component**  
Fluid  
**{not provided} (--- GAL)**

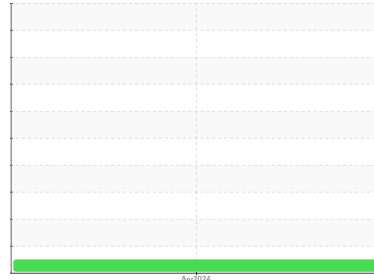

## DIAGNOSIS

**Recommendation**  
Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample. Please provide more complete information on your next sample.

**Wear**  
All component wear rates are normal.

**Contamination**  
There is no indication of any contamination in the component(unconfirmed).

**Fluid Condition**  
The condition of the sample is acceptable for the time in service.

## SAMPLE INFORMATION

| method        | limit/base      | current            | history1 | history2 |
|---------------|-----------------|--------------------|----------|----------|
| Sample Number | Client Info     | <b>PC0080796</b>   | ---      | ---      |
| Sample Date   | Client Info     | <b>09 Apr 2024</b> | ---      | ---      |
| Machine Age   | hrs Client Info | <b>0</b>           | ---      | ---      |
| Oil Age       | hrs Client Info | <b>0</b>           | ---      | ---      |
| Oil Changed   | Client Info     | <b>N/A</b>         | ---      | ---      |
| Sample Status |                 | <b>NORMAL</b>      | ---      | ---      |

## CONTAMINATION

| method | limit/base | current    | history1 | history2 |
|--------|------------|------------|----------|----------|
| Water  | WC Method  | <b>NEG</b> | ---      | ---      |

## WEAR METALS

| method    | limit/base        | current      | history1 | history2 |
|-----------|-------------------|--------------|----------|----------|
| PQ        | ASTM D8184*       | <b>0</b>     | ---      | ---      |
| Iron      | ppm ASTM D5185(m) | <b>0</b>     | ---      | ---      |
| Chromium  | ppm ASTM D5185(m) | <b>0</b>     | ---      | ---      |
| Nickel    | ppm ASTM D5185(m) | <b>0</b>     | ---      | ---      |
| Titanium  | ppm ASTM D5185(m) | <b>0</b>     | ---      | ---      |
| Silver    | ppm ASTM D5185(m) | <b>0</b>     | ---      | ---      |
| Aluminum  | ppm ASTM D5185(m) | <b>0</b>     | ---      | ---      |
| Lead      | ppm ASTM D5185(m) | <b>0</b>     | ---      | ---      |
| Copper    | ppm ASTM D5185(m) | <b>&lt;1</b> | ---      | ---      |
| Tin       | ppm ASTM D5185(m) | <b>0</b>     | ---      | ---      |
| Antimony  | ppm ASTM D5185(m) | <b>0</b>     | ---      | ---      |
| Vanadium  | ppm ASTM D5185(m) | <b>0</b>     | ---      | ---      |
| Beryllium | ppm ASTM D5185(m) | <b>0</b>     | ---      | ---      |
| Cadmium   | ppm ASTM D5185(m) | <b>0</b>     | ---      | ---      |

## ADDITIVES

| method     | limit/base        | current      | history1 | history2 |
|------------|-------------------|--------------|----------|----------|
| Boron      | ppm ASTM D5185(m) | <b>&lt;1</b> | ---      | ---      |
| Barium     | ppm ASTM D5185(m) | <b>0</b>     | ---      | ---      |
| Molybdenum | ppm ASTM D5185(m) | <b>0</b>     | ---      | ---      |
| Manganese  | ppm ASTM D5185(m) | <b>0</b>     | ---      | ---      |
| Magnesium  | ppm ASTM D5185(m) | <b>&lt;1</b> | ---      | ---      |
| Calcium    | ppm ASTM D5185(m) | <b>3</b>     | ---      | ---      |
| Phosphorus | ppm ASTM D5185(m) | <b>12</b>    | ---      | ---      |
| Zinc       | ppm ASTM D5185(m) | <b>3</b>     | ---      | ---      |
| Sulfur     | ppm ASTM D5185(m) | <b>1614</b>  | ---      | ---      |
| Lithium    | ppm ASTM D5185(m) | <b>&lt;1</b> | ---      | ---      |





## CONTAMINANTS

| method    | limit/base            | current      | history1 | history2 |
|-----------|-----------------------|--------------|----------|----------|
| Silicon   | ppm ASTM D5185(m)     | <b>0</b>     | ---      | ---      |
| Sodium    | ppm ASTM D5185(m)     | <b>&lt;1</b> | ---      | ---      |
| Potassium | ppm ASTM D5185(m) >20 | <b>&lt;1</b> | ---      | ---      |

## FLUID DEGRADATION

| method           | limit/base          | current     | history1 | history2 |
|------------------|---------------------|-------------|----------|----------|
| Acid Number (AN) | mg KOH/g ASTM D974* | <b>0.12</b> | ---      | ---      |

# OIL ANALYSIS REPORT

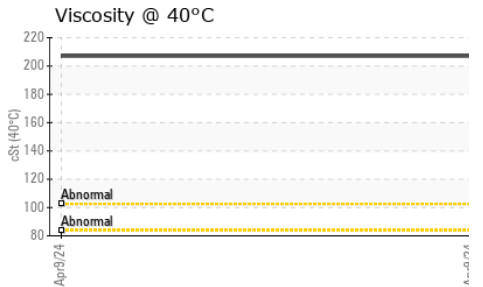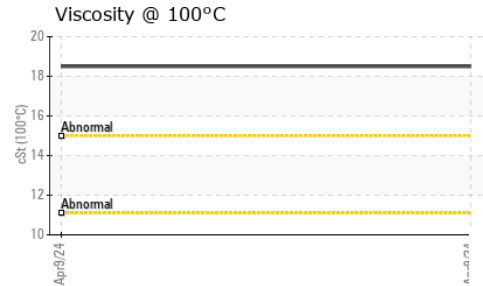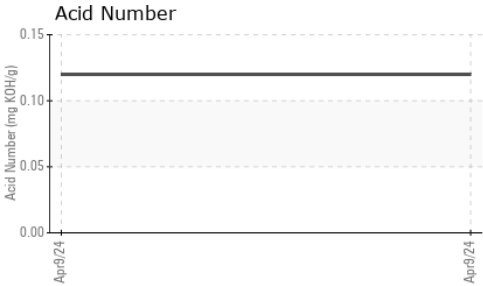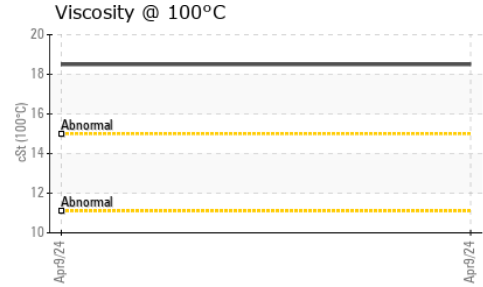






| VISUAL           | method | limit/base | current | history1     | history2 |     |
|------------------|--------|------------|---------|--------------|----------|-----|
| White Metal      | scalar | Visual*    | NONE    | <b>NONE</b>  | ---      | --- |
| Yellow Metal     | scalar | Visual*    | NONE    | <b>NONE</b>  | ---      | --- |
| Precipitate      | scalar | Visual*    | NONE    | <b>NONE</b>  | ---      | --- |
| Silt             | scalar | Visual*    | NONE    | <b>NONE</b>  | ---      | --- |
| Debris           | scalar | Visual*    | NONE    | <b>NONE</b>  | ---      | --- |
| Sand/Dirt        | scalar | Visual*    | NONE    | <b>NONE</b>  | ---      | --- |
| Appearance       | scalar | Visual*    | NORML   | <b>NORML</b> | ---      | --- |
| Odor             | scalar | Visual*    | NORML   | <b>NORML</b> | ---      | --- |
| Emulsified Water | scalar | Visual*    |         | <b>NEG</b>   | ---      | --- |
| Free Water       | scalar | Visual*    |         | <b>NEG</b>   | ---      | --- |

| FLUID PROPERTIES     | method | limit/base    | current     | history1 | history2 |
|----------------------|--------|---------------|-------------|----------|----------|
| Visc @ 40°C          | cSt    | ASTM D7279(m) | <b>207</b>  | ---      | ---      |
| Visc @ 100°C         | cSt    | ASTM D7279(m) | <b>18.5</b> | ---      | ---      |
| Viscosity Index (VI) | Scale  | ASTM D2270*   | <b>98</b>   | ---      | ---      |

### SAMPLE IMAGES

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
| Color         |        |            |         | no image | no image |
| Bottom        |        |            |         | no image | no image |

### GRAPHS

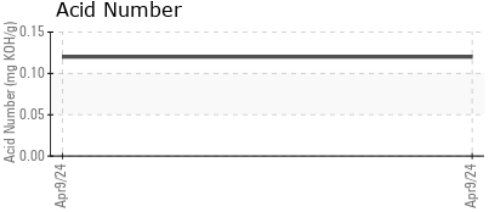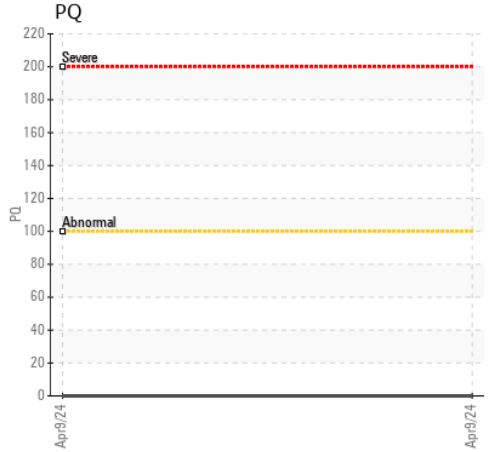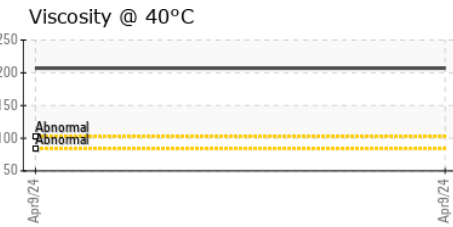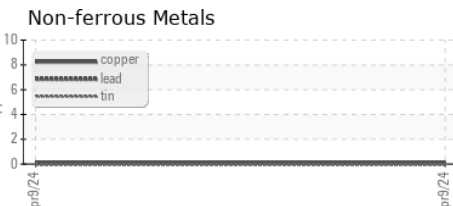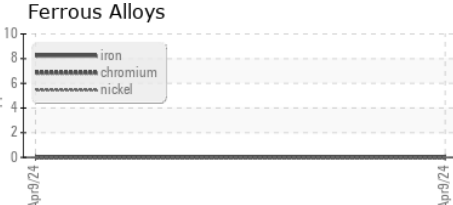

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0080796 **Received** : 26 Apr 2024  
**Lab Number** : **02631769** **Tested** : 26 Apr 2024  
**Unique Number** : 5772922 **Diagnosed** : 01 May 2024 - Kevin Marson  
**Test Package** : MAR 2 ( Additional Tests: KV100, TAN Man, VI )

**Suncor - Terra Nova Projects**  
 Scotia Centre, 235 Water Street  
 St. John's, NL  
 CA A1C 1B6  
 Contact: Josh Hynes  
 joshynes@suncor.com  
 T: (709)778-3575  
 F: (709)724-2835

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.