


# PROBLEM SUMMARY


Area  
**[450296514]**  
 Machine Id  
**EG-80201 EQ MPG**  
 Component  
**Port Turbine**  
 Fluid  
**TURBINE OIL ISO 32 (--- GAL)**

Sample Rating Trend

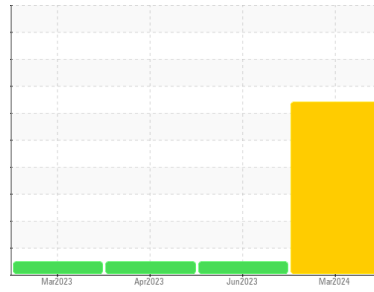

## COMPONENT CONDITION SUMMARY

▲ Particle Trend

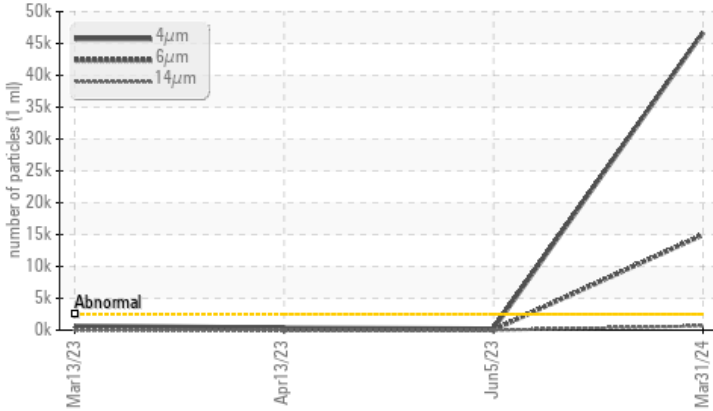

## RECOMMENDATION

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. We advise that you check all areas where contaminants can enter the system. We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. Resample in 30-45 days to monitor this situation. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

## PROBLEMATIC TEST RESULTS

Sample Status			SEVERE	NORMAL	NORMAL
Particles >4µm	ASTM D7647	>2500	▲ 46712	223	383
Particles >6µm	ASTM D7647	>640	▲ 14966	57	76
Particles >14µm	ASTM D7647	>80	▲ 654	6	5
Particles >21µm	ASTM D7647	>20	▲ 115	2	2
Oil Cleanliness	ISO 4406 (c)	>18/16/13	▲ 23/21/17	15/13/10	16/13/10

Customer Id: TERHAM  
 Sample No.: PC0080236  
 Lab Number: 02631968  
 Test Package: MAR 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Kevin Marson +1 (289)291-4644 x4644  
[Kevin.Marson@wearcheck.com](mailto:Kevin.Marson@wearcheck.com)

To change component or sample information:  
 Gloria Gonzalez +1 (289)291-4643 x4643  
[gloria.gonzalez@wearcheck.com](mailto:gloria.gonzalez@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid.
Resample	---	---	?	Resample in 30-45 days to monitor this situation.
Alert	---	---	?	Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment.
Information Required	---	---	?	Please specify the brand, type, and viscosity of the oil on your next sample. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.
Check Breathers	---	---	?	The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather.
Check Dirt Access	---	---	?	We advise that you check all areas where contaminants can enter the system.
Filter Fluid	---	---	?	We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid.

## HISTORICAL DIAGNOSIS

NORMAL



### 05 Jun 2023 Diag: Kevin Marson

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample. All component wear rates are normal. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



NORMAL



### 13 Apr 2023 Diag: Kevin Marson

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample. All component wear rates are normal. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



NORMAL



### 13 Mar 2023 Diag: Kevin Marson


Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) TURBINE OIL ISO 32. Please confirm. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. All component wear rates are normal. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report





Area  
**[450296514]**  
 Machine Id  
**EG-80201 EQ MPG**  
 Component  
**Port Turbine**  
 Fluid  
**TURBINE OIL ISO 32 (--- GAL)**

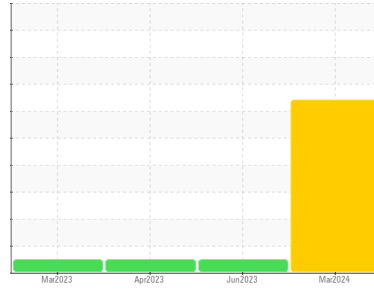

## DIAGNOSIS

### Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. We advise that you check all areas where contaminants can enter the system. We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. Resample in 30-45 days to monitor this situation. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of particulates (2 to 100 microns in size) present in the oil. The water content is negligible.

### Fluid Condition

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PC0080236</b>	PC	PC
Sample Date	Client Info	<b>31 Mar 2024</b>	05 Jun 2023	13 Apr 2023
Machine Age	hrs	Client Info	0	0
Oil Age	hrs	Client Info	0	0
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>SEVERE</b>	NORMAL	NORMAL

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m) >15	<b>0</b>	<1	<1
Chromium	ppm	ASTM D5185(m) >4	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m) >2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m) >10	<b>0</b>	<1	<1
Lead	ppm	ASTM D5185(m)	<b>0</b>	0	0
Copper	ppm	ASTM D5185(m) >5	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185(m) >5	<b>0</b>	1	1
Antimony	ppm	ASTM D5185(m)	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m) 5	<b>0</b>	<1	<1
Barium	ppm	ASTM D5185(m) 5	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m) 5	<b>0</b>	0	0
Manganese	ppm	ASTM D5185(m)	<b>0</b>	0	0
Magnesium	ppm	ASTM D5185(m) 5	<b>&lt;1</b>	<1	<1
Calcium	ppm	ASTM D5185(m) 10	<b>0</b>	<1	3
Phosphorus	ppm	ASTM D5185(m) 275	<b>268</b>	268	275
Zinc	ppm	ASTM D5185(m) 7	<b>1</b>	2	2
Sulfur	ppm	ASTM D5185(m) 400	<b>690</b>	506	505
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	<1






## CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m) >15	<b>0</b>	<1	<1
Sodium	ppm	ASTM D5185(m)	<b>0</b>	0	<1
Potassium	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	0	0
Water	%	ASTM D6304* >0.03	<b>0.001</b>	---	---
ppm Water	ppm	ASTM D6304* >300	<b>7</b>	---	---

## FLUID CLEANLINESS

method	limit/base	current	history1	history2	
Particles >4µm	ASTM D7647	>2500	<b>▲ 46712</b>	223	383
Particles >6µm	ASTM D7647	>640	<b>▲ 14966</b>	57	76
Particles >14µm	ASTM D7647	>80	<b>▲ 654</b>	6	5
Particles >21µm	ASTM D7647	>20	<b>▲ 115</b>	2	2
Particles >38µm	ASTM D7647	>4	<b>● 8</b>	0	0
Particles >71µm	ASTM D7647	>3	<b>0</b>	0	0
Oil Cleanliness	ISO 4406 (c)	>18/16/13	<b>▲ 23/21/17</b>	15/13/10	16/13/10

# OIL ANALYSIS REPORT

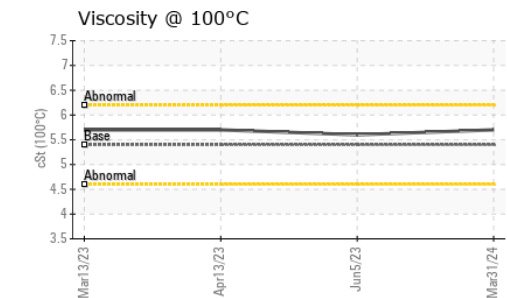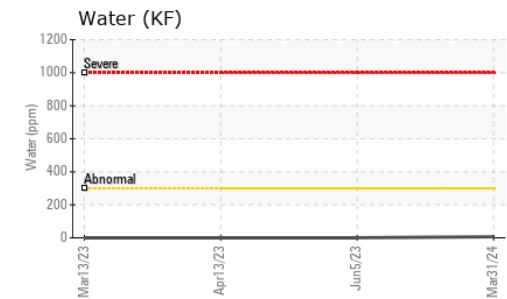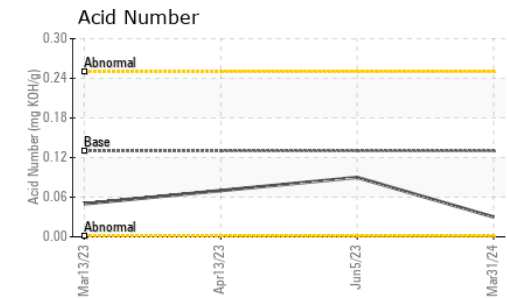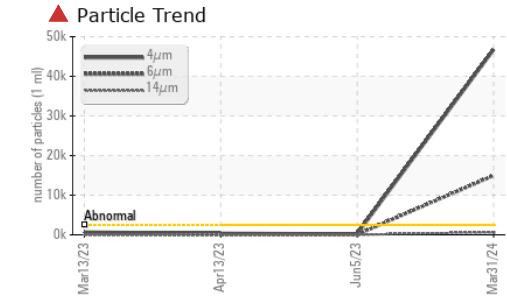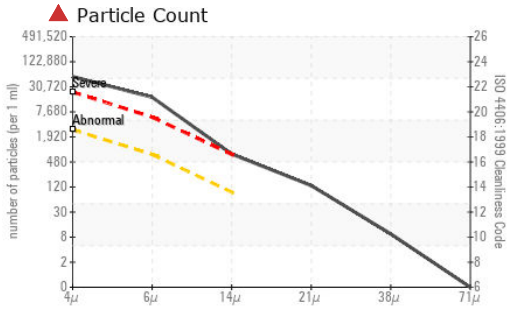


FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.13	<b>0.03</b>	0.09	0.07

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>0.03	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	32	<b>33.6</b>	33.6	33.6
Visc @ 100°C	cSt	ASTM D7279(m)	5.4	<b>5.7</b>	5.6	5.7
Viscosity Index (VI)	Scale	ASTM D2270*	102	<b>109</b>	103	109

## SAMPLE IMAGES

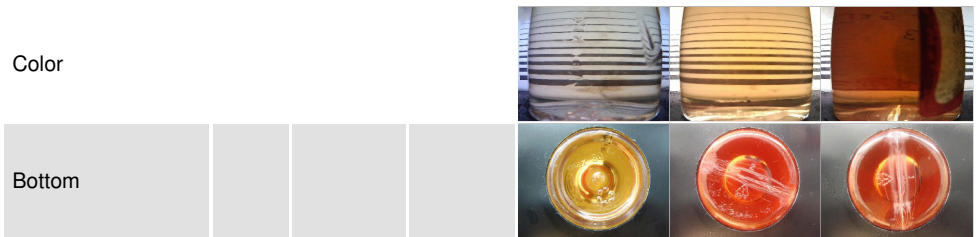

Color

Bottom



**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0080236  
**Lab Number** : **02631968**  
**Unique Number** : 5773121  
**Test Package** : MAR 2 ( Additional Tests: KF, KV100, PrtCount, TAN Man, VI )

**Received** : 29 Apr 2024  
**Tested** : 01 May 2024  
**Diagnosed** : 01 May 2024 - Kevin Marson

**Suncor - Terra Nova Projects**  
 Scotia Centre, 235 Water Street  
 St. John's, NL  
 CA A1C 1B6  
 Contact: Josh Hynes  
 joshynes@suncor.com  
 T: (709)778-3575  
 F: (709)724-2835

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.