




# OIL ANALYSIS REPORT

Sample Rating Trend

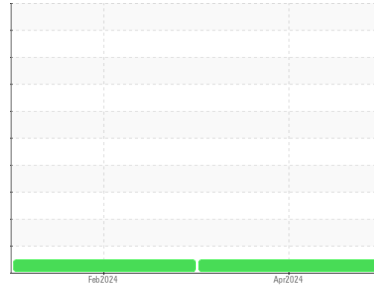

**NORMAL**



Area  
[1264883]

Machine Id  
**101042**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 10W30 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>GFL0116402</b>	GFL0107934	---
Sample Date	Client Info			<b>25 Apr 2024</b>	05 Feb 2024	---
Machine Age	kms	Client Info		<b>362935</b>	21917	---
Oil Age	kms	Client Info		<b>10893</b>	500	---
Oil Changed	Client Info			<b>Changed</b>	Changed	---
Sample Status				<b>NORMAL</b>	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	---
Water	WC Method	>0.2		<b>NEG</b>	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>100	<b>10</b>	15	---
Chromium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	1	---
Nickel	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	<1	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185(m)	>20	<b>2</b>	4	---
Lead	ppm	ASTM D5185(m)	>40	<b>0</b>	0	---
Copper	ppm	ASTM D5185(m)	>330	<b>2</b>	1	---
Tin	ppm	ASTM D5185(m)	>15	<b>0</b>	0	---
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	---




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	2	<b>2</b>	1	---
Barium	ppm	ASTM D5185(m)	0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185(m)	50	<b>61</b>	60	---
Manganese	ppm	ASTM D5185(m)	0	<b>&lt;1</b>	0	---
Magnesium	ppm	ASTM D5185(m)	950	<b>991</b>	978	---
Calcium	ppm	ASTM D5185(m)	1050	<b>1061</b>	1070	---
Phosphorus	ppm	ASTM D5185(m)	995	<b>1027</b>	1040	---
Zinc	ppm	ASTM D5185(m)	1180	<b>1196</b>	1204	---
Sulfur	ppm	ASTM D5185(m)	2600	<b>2525</b>	2772	---
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	<b>2</b>	5	---
Sodium	ppm	ASTM D5185(m)		<b>8</b>	6	---
Potassium	ppm	ASTM D5185(m)	>20	<b>13</b>	12	---
Glycol	%	ASTM D7922*		<b>0.0</b>	NEG	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>3	<b>0</b>	0	---
Nitration	Abs/cm	ASTM D7624*	>20	<b>8.2</b>	8.1	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>19.4</b>	19.4	---



# OIL ANALYSIS REPORT






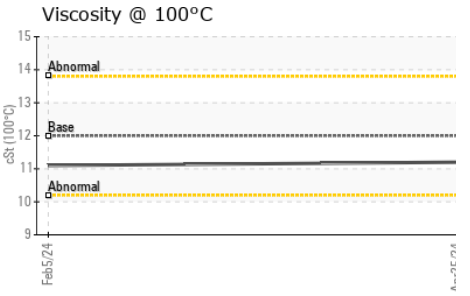
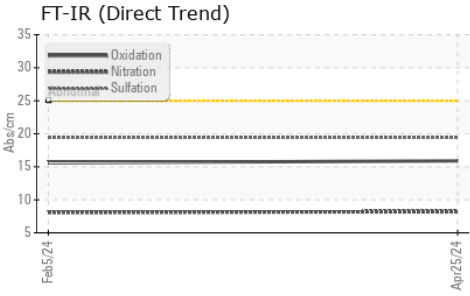
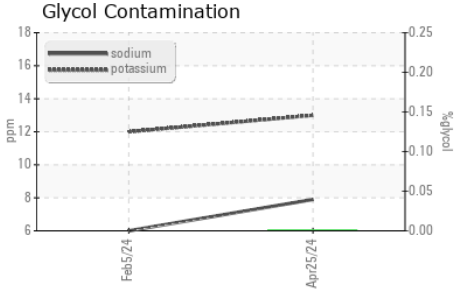


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	<b>15.9</b>	15.6	---

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	---
Free Water	scalar	Visual*		<b>NEG</b>	NEG	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	<b>11.2</b>	11.1	---

## GRAPHS

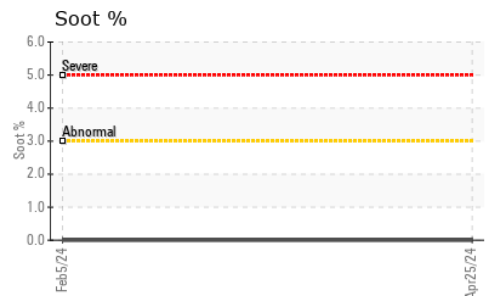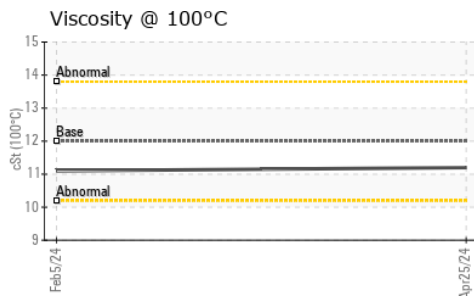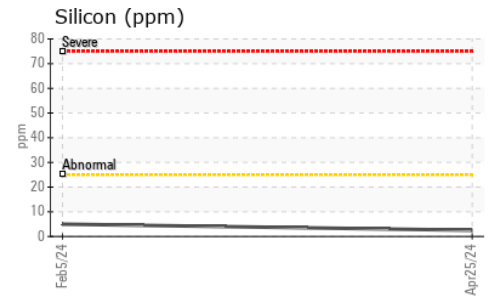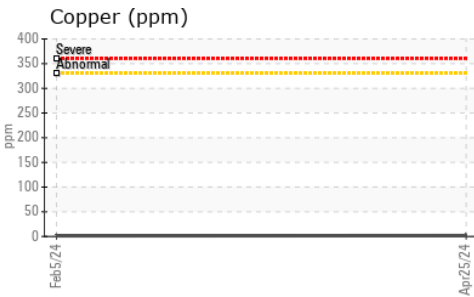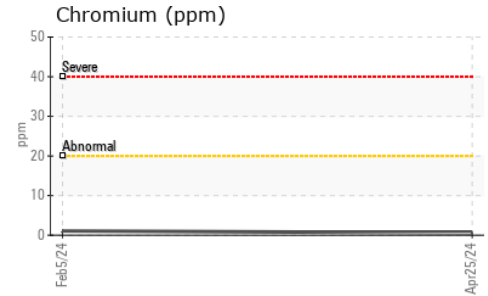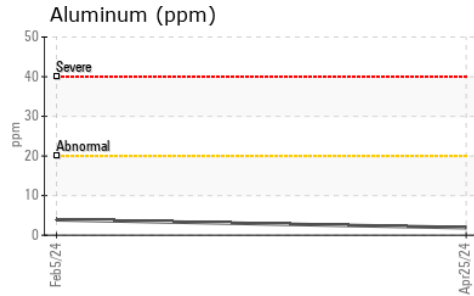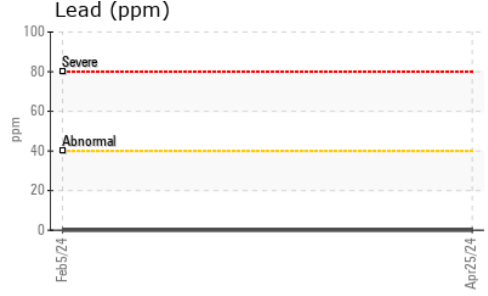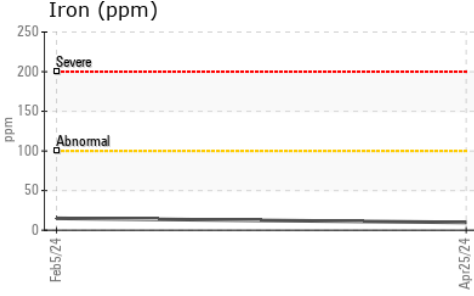

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0116402      **Received** : 01 May 2024  
**Lab Number** : 02632501      **Tested** : 01 May 2024  
**Unique Number** : 5773654      **Diagnosed** : 01 May 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: Glycol )

**GFL Environmental - 350 - Emeral Park Regina**  
 2B Industrial Drive., Great Plains Industrial Park,  
 Emerald Park, SK  
 CA S4L 1B6

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

Contact: Vaughn Hortness  
 vhortness@gflenv.com  
 T: (877)244-9500  
 F: (306)244-9501