




OIL ANALYSIS REPORT

Sample Rating Trend

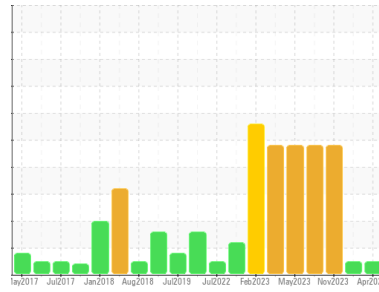

NORMAL



Machine Id

4790

Component

Diesel Engine

Fluid

PETRO CANADA DURON SHP 10W30 (--- LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0112489	GFL0102667	GFL0097606
Sample Date	Client Info		25 Apr 2024	26 Feb 2024	07 Nov 2023
Machine Age	hrs	Client Info	15709	15314	14799
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		Changed	N/A	N/A
Sample Status			NORMAL	NORMAL	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	0.0	▲ 0.026

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>110	46	47	23
Chromium	ppm	ASTM D5185(m)	>4	2	2	1
Nickel	ppm	ASTM D5185(m)	>2	<1	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>2	0	0	<1
Aluminum	ppm	ASTM D5185(m)	>25	5	7	3
Lead	ppm	ASTM D5185(m)	>45	<1	1	<1
Copper	ppm	ASTM D5185(m)	>85	20	6	8
Tin	ppm	ASTM D5185(m)	>4	<1	<1	0
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	2	3	7	1
Barium	ppm	ASTM D5185(m)	0	0	0	<1
Molybdenum	ppm	ASTM D5185(m)	50	57	57	87
Manganese	ppm	ASTM D5185(m)	0	<1	<1	0
Magnesium	ppm	ASTM D5185(m)	950	903	845	902
Calcium	ppm	ASTM D5185(m)	1050	1031	1020	990
Phosphorus	ppm	ASTM D5185(m)	995	931	923	912
Zinc	ppm	ASTM D5185(m)	1180	1122	1072	1094
Sulfur	ppm	ASTM D5185(m)	2600	2228	2481	2310
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS



	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>30	7	7	7
Sodium	ppm	ASTM D5185(m)		39	54	● 636
Potassium	ppm	ASTM D5185(m)	>20	2	5	▲ 20

INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>3	0.7	0.6	0.3
Nitration	Abs/cm	ASTM D7624*	>20	10.8	10.3	11.3
Sulfation	Abs/.1mm	ASTM D7415*	>30	22.2	19.9	21.2



OIL ANALYSIS REPORT

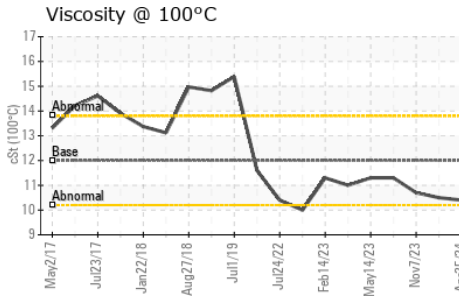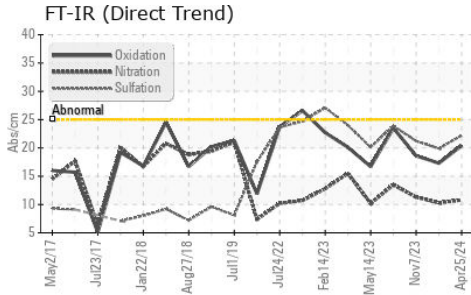

FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs./1mm ASTM D7414*	>25	20.4	17.3	18.6









VISUAL

method	limit/base	current	history1	history2	
Emulsified Water	scalar Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar Visual*	NEG	NEG	NEG	

FLUID PROPERTIES

method	limit/base	current	history1	history2	
Visc @ 100°C	cSt ASTM D7279(m)	12.00	10.4	10.5	10.7

GRAPHS

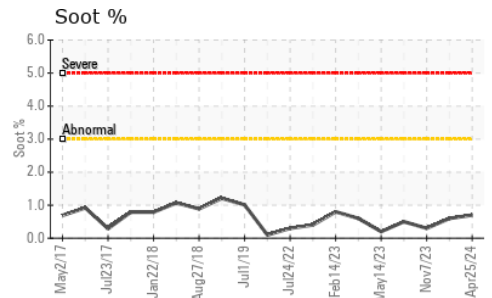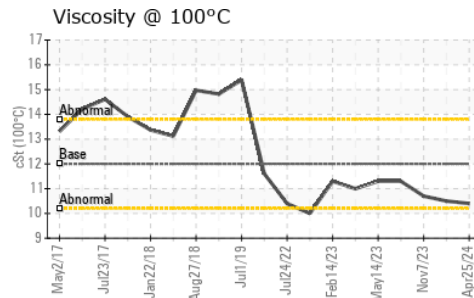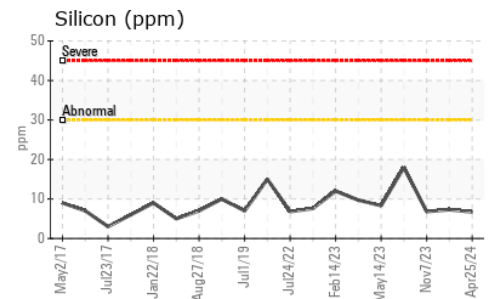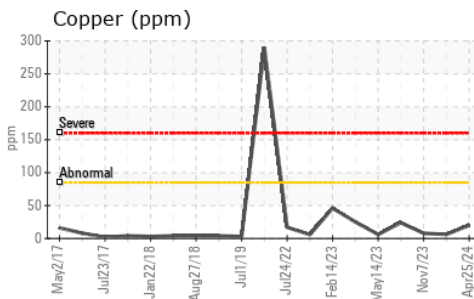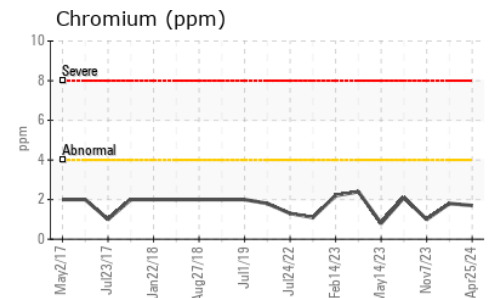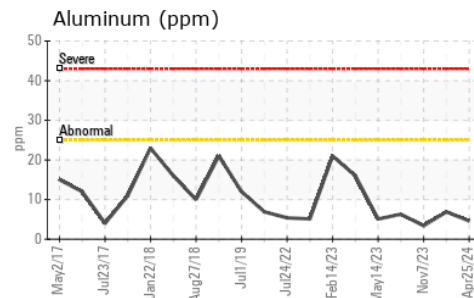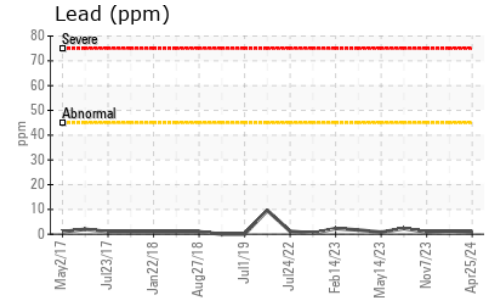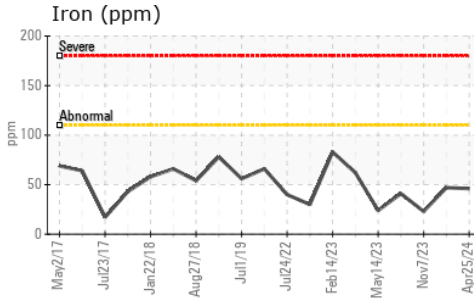

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0112489
Lab Number : 02634075
Unique Number : 5775228
Test Package : MOB 1
Received : 08 May 2024
Tested : 08 May 2024
Diagnosed : 08 May 2024 - Kevin Marson

GFL Environmental - 554 - Edmonton SW
 8409 -15th Street NW
 Edmonton, AB
 CA T6P 0B8
 Contact: Tim Greig
 tgreig@gflenv.com
 T: (780)231-0521
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.