




OIL ANALYSIS REPORT

Sample Rating Trend

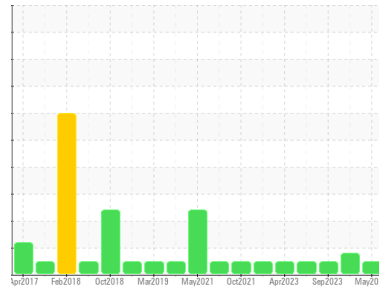

NORMAL



Machine Id

9131

Component

Diesel Engine

Fluid

PETRO CANADA DURON SHP 10W30 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0118960	GFL0102669	GFL0093915
Sample Date	Client Info		03 May 2024	05 Mar 2024	21 Sep 2023
Machine Age	kms	Client Info	21574	0	0
Oil Age	kms	Client Info	0	0	0
Oil Changed	Client Info		Changed	N/A	N/A
Sample Status			NORMAL	ABNORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>110	64	61	51
Chromium	ppm	ASTM D5185(m)	>4	4	4	2
Nickel	ppm	ASTM D5185(m)	>2	1	1	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>2	0	0	0
Aluminum	ppm	ASTM D5185(m)	>25	8	8	8
Lead	ppm	ASTM D5185(m)	>45	0	<1	<1
Copper	ppm	ASTM D5185(m)	>85	17	3	5
Tin	ppm	ASTM D5185(m)	>4	0	<1	<1
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	2	3	2	1
Barium	ppm	ASTM D5185(m)	0	<1	0	0
Molybdenum	ppm	ASTM D5185(m)	50	60	58	58
Manganese	ppm	ASTM D5185(m)	0	<1	<1	<1
Magnesium	ppm	ASTM D5185(m)	950	977	930	961
Calcium	ppm	ASTM D5185(m)	1050	1095	1036	1046
Phosphorus	ppm	ASTM D5185(m)	995	965	950	975
Zinc	ppm	ASTM D5185(m)	1180	1155	1124	1171
Sulfur	ppm	ASTM D5185(m)	2600	2281	2448	2343
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>30	14	16	9
Sodium	ppm	ASTM D5185(m)		8	10	9
Potassium	ppm	ASTM D5185(m)	>20	3	3	0

INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>3	0.8	1.8	1.1
Nitration	Abs/cm	ASTM D7624*	>20	9.9	11.8	11.9
Sulfation	Abs/.1mm	ASTM D7415*	>30	21.9	24.4	25.4

