




OIL ANALYSIS REPORT

Sample Rating Trend

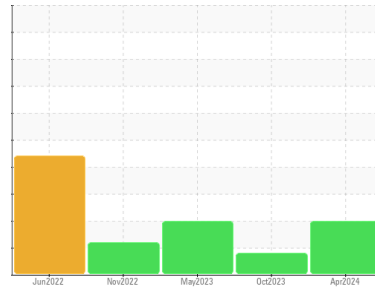

ISO



Machine Id
411010
 Component
Hydraulic System
 Fluid
AW HYDRAULIC OIL ISO 32 (--- GAL)

DIAGNOSIS

Recommendation

Nous vous recommandons de remplacer le filtre et d'utiliser un système de filtrage hors-ligne afin d'améliorer la propreté du fluide. Nous vous recommandons d'échantillonner de nouveau dès que possible afin de contrôler la situation.

Wear

Les taux d'usure de tous les composants sont normaux.

Contamination

Il y a une quantité modérée de matières particulaires (2 à 100 µm de taille) présente dans l'huile.

Fluid Condition

l'huile peut encore servir si la contamination peut être réduite à un niveau acceptable.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0111793	GFL0063129	GFL0063108
Sample Date	Client Info		15 Apr 2024	31 Oct 2023	19 May 2023
Machine Age	hrs	Client Info	7569	6655	5722
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		N/A	Not Changd	Not Changd
Sample Status			ABNORMAL	ABNORMAL	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >50	8	6	6
Chromium	ppm	ASTM D5185(m) >10	<1	<1	<1
Nickel	ppm	ASTM D5185(m) >4	0	0	<1
Titanium	ppm	ASTM D5185(m)	0	0	<1
Silver	ppm	ASTM D5185(m)	0	<1	0
Aluminum	ppm	ASTM D5185(m) >5	<1	<1	<1
Lead	ppm	ASTM D5185(m) >4	0	<1	<1
Copper	ppm	ASTM D5185(m) >15	6	5	5
Tin	ppm	ASTM D5185(m) >4	0	0	0
Antimony	ppm	ASTM D5185(m)	0	0	<1
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 5	<1	<1	<1
Barium	ppm	ASTM D5185(m) 5	0	<1	0
Molybdenum	ppm	ASTM D5185(m) 5	0	0	0
Manganese	ppm	ASTM D5185(m)	0	0	0
Magnesium	ppm	ASTM D5185(m) 25	2	2	2
Calcium	ppm	ASTM D5185(m) 200	571	593	663
Phosphorus	ppm	ASTM D5185(m) 300	219	199	217
Zinc	ppm	ASTM D5185(m) 370	104	72	47
Sulfur	ppm	ASTM D5185(m) 2500	1011	1018	1108
Lithium	ppm	ASTM D5185(m)	<1	<1	<1

CONTAMINANTS




	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >15	<1	<1	<1
Sodium	ppm	ASTM D5185(m)	3	3	3
Potassium	ppm	ASTM D5185(m) >20	<1	<1	<1

FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	▲ 32494	▲ 10476	▲ 27412
Particles >6µm	ASTM D7647	>1300	▲ 7790	729	▲ 3591
Particles >14µm	ASTM D7647	>160	▲ 535	24	▲ 356
Particles >21µm	ASTM D7647	>40	▲ 109	5	▲ 107
Particles >38µm	ASTM D7647	>10	10	1	6
Particles >71µm	ASTM D7647	>3	1	0	1
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ 22/20/16	▲ 21/17/12	▲ 22/19/16




OIL ANALYSIS REPORT

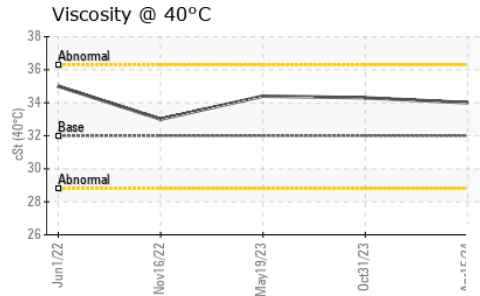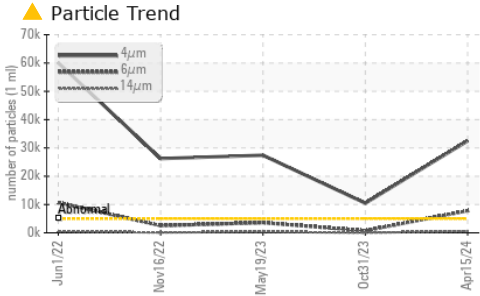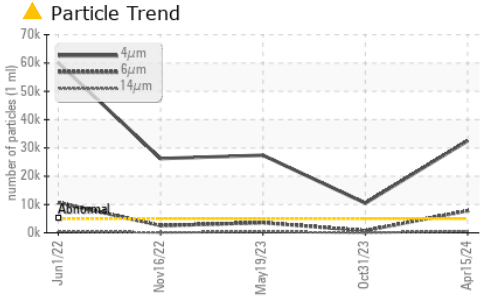





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	VLITE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	32	34.0	34.3

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

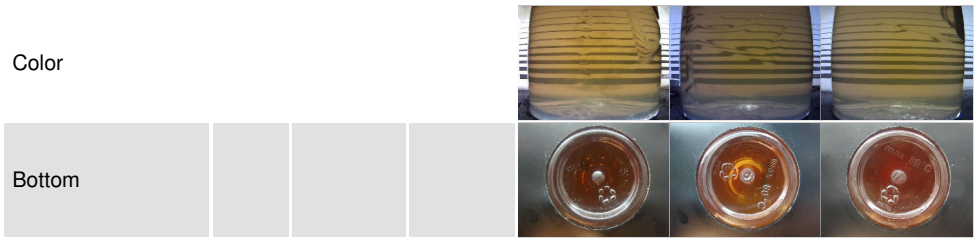

GRAPHS

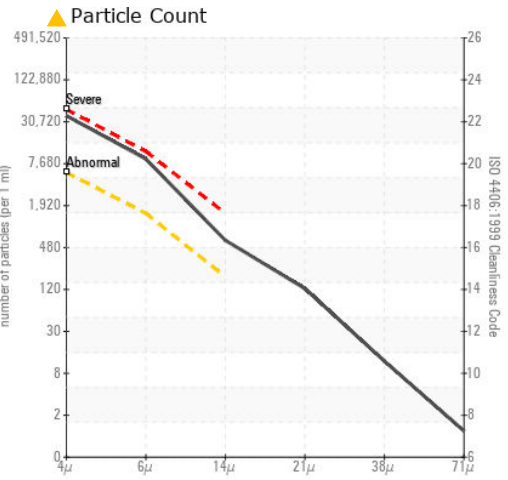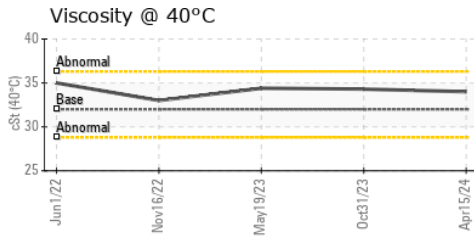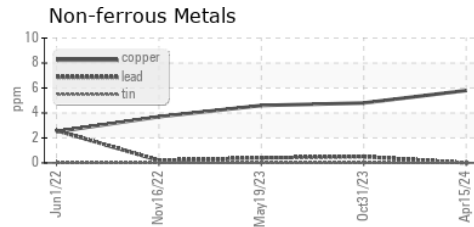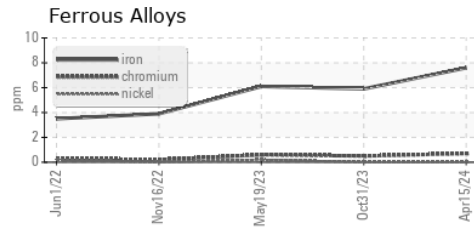

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **GFL Environmental - 769 - Drummondville QC**
Sample No. : GFL0111793 **Received** : 08 May 2024 1005 rue Rhea
Lab Number : 02634137 **Tested** : 09 May 2024 Drummondville, QC
Unique Number : 5775290 **Diagnosed** : 09 May 2024 - Kevin Marson CA J2B 8A9
Test Package : MOB 1 (Additional Tests: PrtCount) Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.