


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

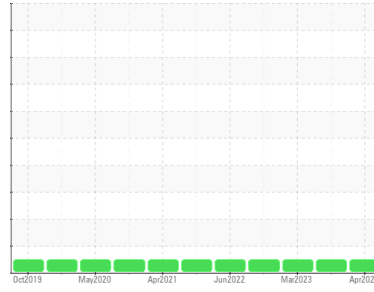

Machine Id
CR253
Component
Diesel Engine
Fluid
PETRO CANADA DURON UHP 5W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PC0088294	PC0078370	PC0072038
Sample Date	Client Info			26 Apr 2024	10 Nov 2023	28 Mar 2023
Machine Age	hrs	Client Info		8766	8197	7010
Oil Age	hrs	Client Info		0	250	500
Oil Changed	Client Info			Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG




WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>100	6	5	6
Chromium	ppm	ASTM D5185(m)	>20	0	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	0	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	<1
Silver	ppm	ASTM D5185(m)	>3	0	<1	0
Aluminum	ppm	ASTM D5185(m)	>20	2	3	4
Lead	ppm	ASTM D5185(m)	>40	0	0	0
Copper	ppm	ASTM D5185(m)	>330	<1	1	8
Tin	ppm	ASTM D5185(m)	>15	0	0	0
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	65	43	34	52
Barium	ppm	ASTM D5185(m)	0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	65	56	54	63
Manganese	ppm	ASTM D5185(m)	0	0	0	<1
Magnesium	ppm	ASTM D5185(m)	1160	1048	1032	1104
Calcium	ppm	ASTM D5185(m)	820	813	778	839
Phosphorus	ppm	ASTM D5185(m)	1160	950	952	1086
Zinc	ppm	ASTM D5185(m)	1260	1159	1133	1177
Sulfur	ppm	ASTM D5185(m)	3000	2644	2719	2878
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	1	2	3
Sodium	ppm	ASTM D5185(m)		5	6	6
Potassium	ppm	ASTM D5185(m)	>20	3	5	6

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>3	0	0	0
Nitration	Abs/cm	ASTM D7624*	>20	10.1	10.1	9.5
Sulfation	Abs/.1mm	ASTM D7415*	>30	20.5	20.7	22.9

OIL ANALYSIS REPORT






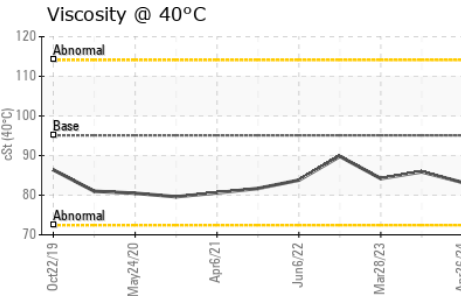
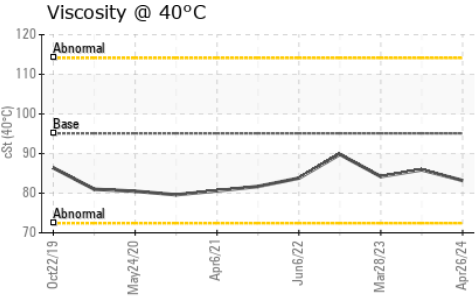
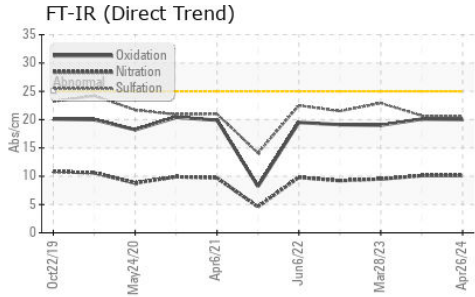


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	20.0	20.1	19.0

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	95.1	83.2	85.9	84.2
Visc @ 100°C	cSt	ASTM D7279(m)	14.3	13.6	13.9	13.8
Viscosity Index (VI)	Scale	ASTM D2270*	169	167	166	168

GRAPHS

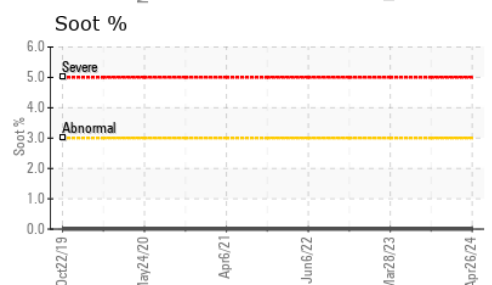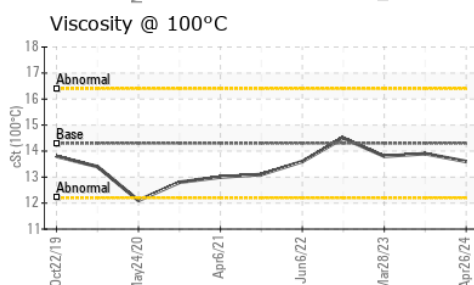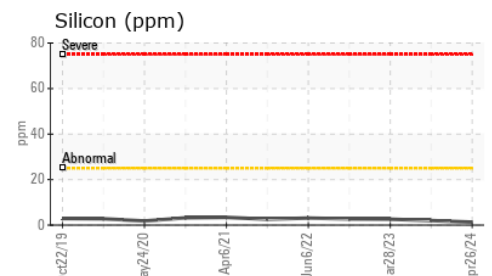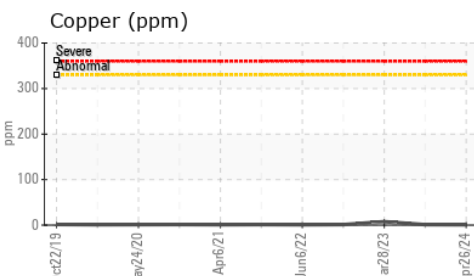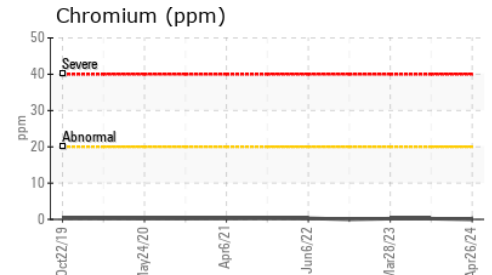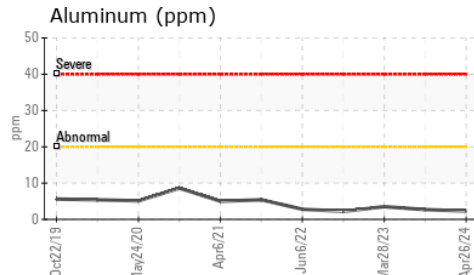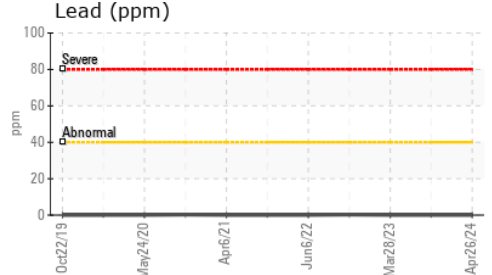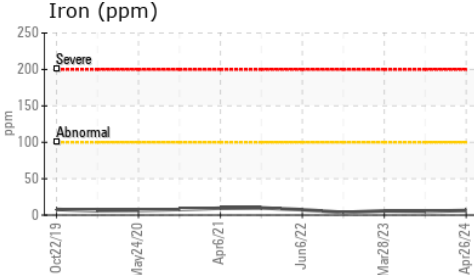

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Green Infrastructure and Partners Inc (GIPI) - 286 - Shoring & Foundations
Sample No. : PC0088294 **Received** : 10 May 2024
Lab Number : **02634525** **Tested** : 13 May 2024
Unique Number : 5775678 **Diagnosed** : 13 May 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: KV40, VI) 151 Ram Forest Rd,
Stouffville, ON
CA L4A 2G8
Contact: Shannon Abbott
sabbott@gipi.com
T: (905)750-5900
F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.