




# OIL ANALYSIS REPORT

Sample Rating Trend

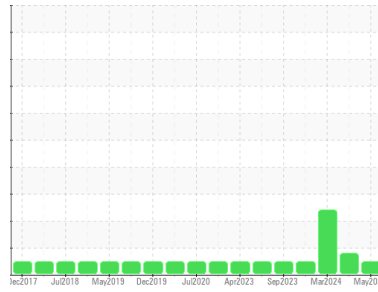

**NORMAL**



Machine Id  
**701026**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (25 LTR)**

## DIAGNOSIS

### Recommendation

Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

Additive levels indicate the addition of a different brand, or type of oil. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0122313</b>	GFL0111739	GFL0111720
Sample Date	Client Info		<b>15 May 2024</b>	19 Mar 2024	08 Mar 2024
Machine Age	hrs	Client Info	<b>13226</b>	13226	13226
Oil Age	hrs	Client Info	<b>600</b>	600	0
Oil Changed	Client Info		<b>Changed</b>	Not Changd	Changed
Sample Status			<b>NORMAL</b>	MARGINAL	SEVERE

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	▲ 4.6	▲ 11.7
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>80	<b>4</b>	1	5
Chromium	ppm	ASTM D5185(m)	>5	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m)	>2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185(m)		<b>2</b>	0	0
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>30	<b>2</b>	0	2
Lead	ppm	ASTM D5185(m)	>30	<b>0</b>	0	<1
Copper	ppm	ASTM D5185(m)	>150	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185(m)	>5	<b>0</b>	0	0
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	0	<b>39</b>	7	7
Barium	ppm	ASTM D5185(m)	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	60	<b>79</b>	54	50
Manganese	ppm	ASTM D5185(m)	0	<b>0</b>	0	0
Magnesium	ppm	ASTM D5185(m)	1010	<b>241</b>	895	811
Calcium	ppm	ASTM D5185(m)	1070	<b>1846</b>	989	906
Phosphorus	ppm	ASTM D5185(m)	1150	<b>963</b>	940	890
Zinc	ppm	ASTM D5185(m)	1270	<b>1110</b>	1092	1011
Sulfur	ppm	ASTM D5185(m)	2060	<b>2856</b>	2460	2398
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

## CONTAMINANTS


	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>20	<b>2</b>	2	3
Sodium	ppm	ASTM D5185(m)		<b>1</b>	2	3
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	0	1

## INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>3	<b>0.1</b>	0	0.1
Nitration	Abs/cm	ASTM D7624*	>20	<b>8.8</b>	4.9	7.5
Sulfation	Abs./1mm	ASTM D7415*	>30	<b>18.4</b>	17.6	18.7



# OIL ANALYSIS REPORT










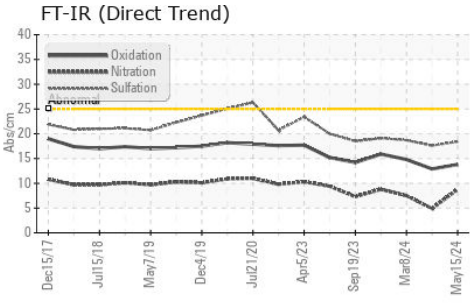


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	<b>13.8</b>	12.9	14.8

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	<b>13.1</b>	12.9	▲ 11.1

## GRAPHS

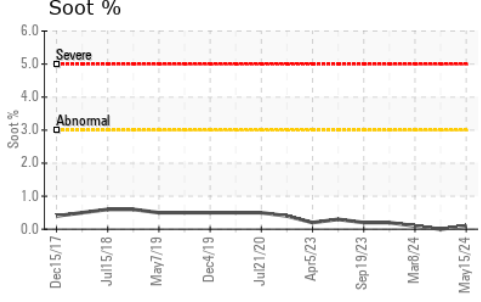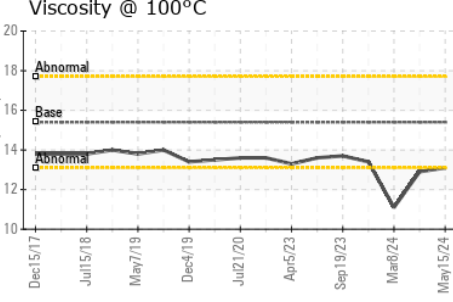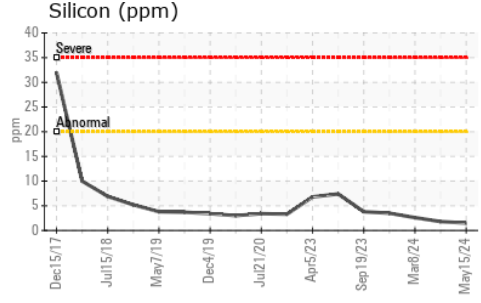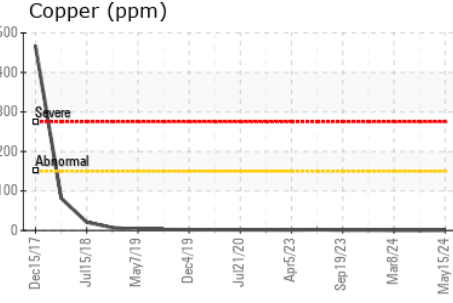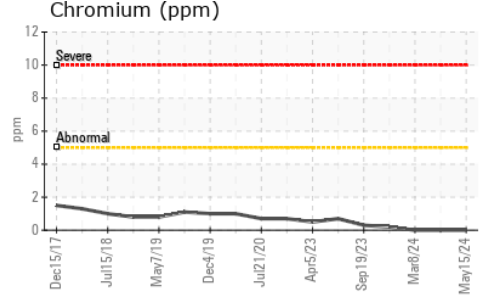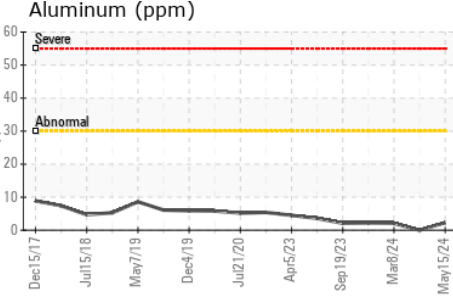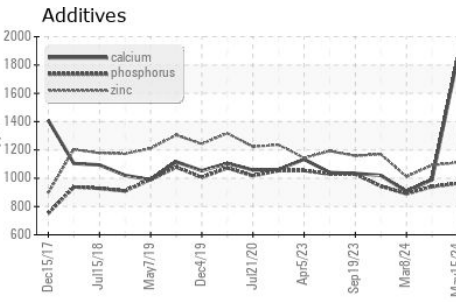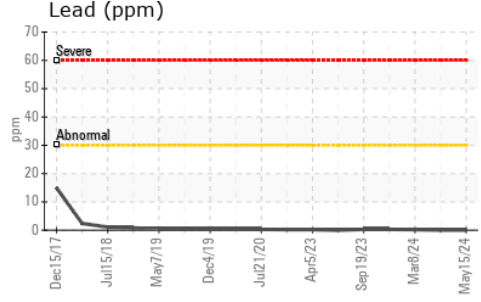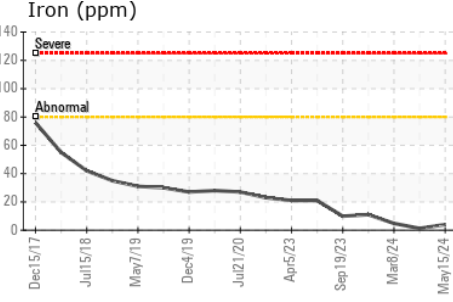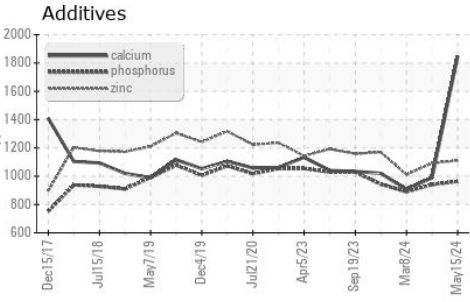

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0122313  
**Lab Number** : 02636275  
**Unique Number** : 5785437  
**Test Package** : MOB 1  
**Received** : 17 May 2024  
**Tested** : 17 May 2024  
**Diagnosed** : 17 May 2024 - Wes Davis

**GFL Environmental - 217 - Aurora**  
 14131 BAYVIEW AVE, AURORA YARD  
 AURORA, ON  
 CA L4G 0K6  
 Contact: Mike Havens  
 MHavens@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T:  
 F: (905)713-2445