




OIL ANALYSIS REPORT

Sample Rating Trend

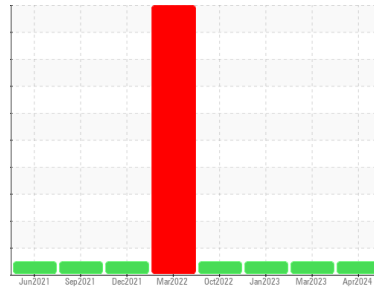

NORMAL



Machine Id
425005
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0080093	GFL0044765	GFL0044756
Sample Date	Client Info		04 Apr 2024	14 Mar 2023	09 Jan 2023
Machine Age	hrs	Client Info	24095	21569	21036
Oil Age	hrs	Client Info	600	600	600
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>6.0	<1.0	0.5	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >100	17	4	14
Chromium	ppm	ASTM D5185(m) >20	0	0	0
Nickel	ppm	ASTM D5185(m) >2	<1	<1	1
Titanium	ppm	ASTM D5185(m)	0	<1	<1
Silver	ppm	ASTM D5185(m) >2	0	0	0
Aluminum	ppm	ASTM D5185(m) >25	1	<1	2
Lead	ppm	ASTM D5185(m) >40	0	0	1
Copper	ppm	ASTM D5185(m) >330	2	<1	6
Tin	ppm	ASTM D5185(m) >15	<1	0	1
Antimony	ppm	ASTM D5185(m)	0	<1	0
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 0	28	8	2
Barium	ppm	ASTM D5185(m) 0	0	0	0
Molybdenum	ppm	ASTM D5185(m) 60	25	49	58
Manganese	ppm	ASTM D5185(m) 0	<1	<1	<1
Magnesium	ppm	ASTM D5185(m) 1010	750	779	977
Calcium	ppm	ASTM D5185(m) 1070	1360	901	1120
Phosphorus	ppm	ASTM D5185(m) 1150	817	952	1090
Zinc	ppm	ASTM D5185(m) 1270	956	1022	1219
Sulfur	ppm	ASTM D5185(m) 2060	2549	2404	2544
Lithium	ppm	ASTM D5185(m)	<1	<1	<1

CONTAMINANTS



	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >25	3	4	4
Sodium	ppm	ASTM D5185(m)	4	2	4
Potassium	ppm	ASTM D5185(m) >20	3	<1	1

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844* >3	0.3	0	0
Nitration	Abs/cm	ASTM D7624* >20	9.5	4.6	9.4
Sulfation	Abs/.1mm	ASTM D7415* >30	22.4	20.4	21.5



OIL ANALYSIS REPORT







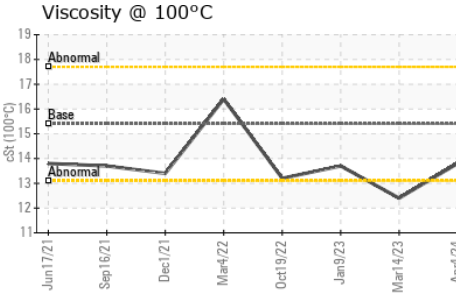
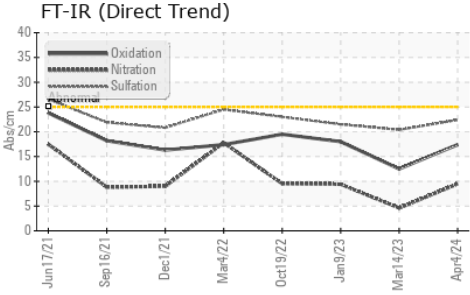


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	17.4	12.5	18.0

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	13.8	12.4	13.7

GRAPHS

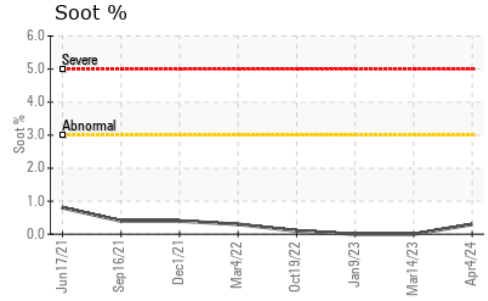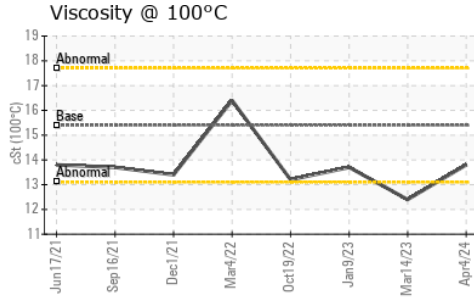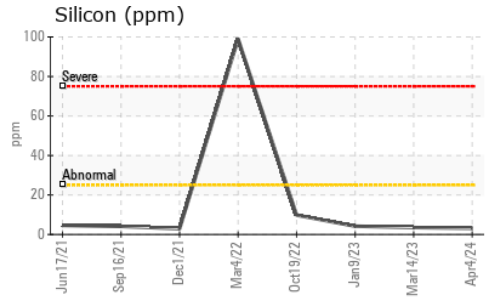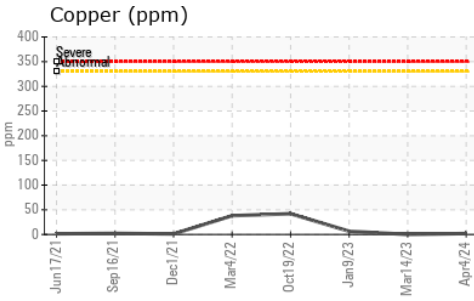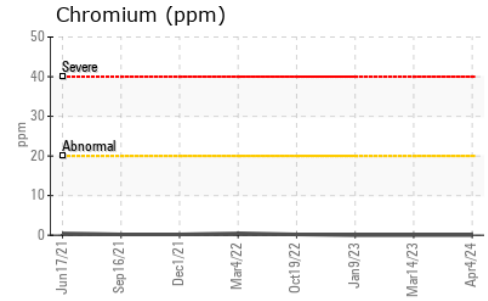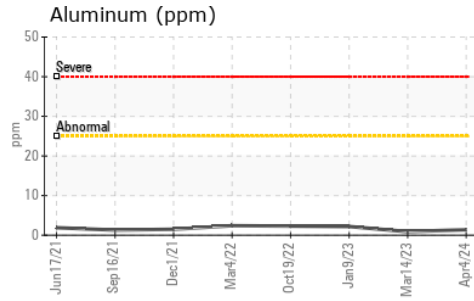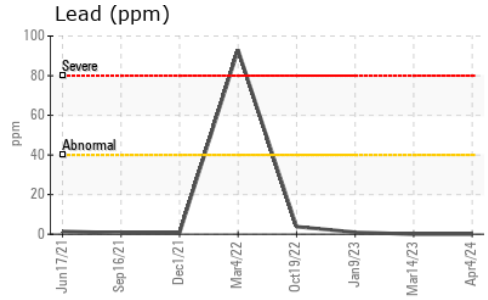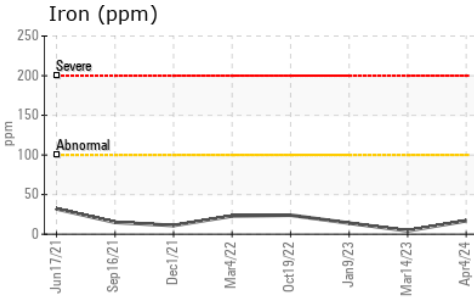

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0080093
Lab Number : 02636837
Unique Number : 5785999
Test Package : MOB 1
Received : 22 May 2024
Tested : 22 May 2024
Diagnosed : 22 May 2024 - Wes Davis

GFL Environmental - 577 - First Class
 8540 Chilliwack Mountain Rd,
 Chilliwack, BC
 CA V2R 3W8
 Contact: Derek Jessop
 djessop@gflenv.com
 T: (604)798-5301
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.