




# OIL ANALYSIS REPORT

## Sample Rating Trend

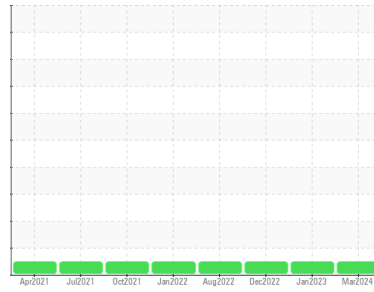

**NORMAL**



Machine Id

**710029**

Component

**Diesel Engine**

Fluid

**PETRO CANADA DURON SHP 15W40 (--- LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2    |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info |             | <b>GFL0080089</b>  | GFL0044754  | GFL0044759  |
| Sample Date   | Client Info |             | <b>21 Mar 2024</b> | 12 Jan 2023 | 19 Dec 2022 |
| Machine Age   | hrs         | Client Info | <b>7352</b>        | 4636        | 4507        |
| Oil Age       | hrs         | Client Info | <b>600</b>         | 600         | 600         |
| Oil Changed   | Client Info |             | <b>Changed</b>     | Changed     | Changed     |
| Sample Status |             |             | <b>NORMAL</b>      | NORMAL      | NORMAL      |

## CONTAMINATION

|        | method    | limit/base | current        | history1 | history2 |
|--------|-----------|------------|----------------|----------|----------|
| Fuel   | WC Method | >5         | <b>&lt;1.0</b> | <1.0     | <1.0     |
| Water  | WC Method | >0.2       | <b>NEG</b>     | NEG      | NEG      |
| Glycol | WC Method |            | <b>NEG</b>     | NEG      | NEG      |

## WEAR METALS

|           | method | limit/base    | current | history1     | history2 |    |
|-----------|--------|---------------|---------|--------------|----------|----|
| Iron      | ppm    | ASTM D5185(m) | >80     | <b>22</b>    | 5        | 22 |
| Chromium  | ppm    | ASTM D5185(m) | >5      | <b>&lt;1</b> | 0        | <1 |
| Nickel    | ppm    | ASTM D5185(m) | >2      | <b>&lt;1</b> | <1       | <1 |
| Titanium  | ppm    | ASTM D5185(m) |         | <b>0</b>     | 0        | <1 |
| Silver    | ppm    | ASTM D5185(m) | >3      | <b>0</b>     | 0        | 0  |
| Aluminum  | ppm    | ASTM D5185(m) | >30     | <b>2</b>     | 2        | 3  |
| Lead      | ppm    | ASTM D5185(m) | >30     | <b>0</b>     | 0        | 0  |
| Copper    | ppm    | ASTM D5185(m) | >150    | <b>&lt;1</b> | <1       | 2  |
| Tin       | ppm    | ASTM D5185(m) | >5      | <b>0</b>     | 0        | <1 |
| Antimony  | ppm    | ASTM D5185(m) |         | <b>0</b>     | 0        | 0  |
| Vanadium  | ppm    | ASTM D5185(m) |         | <b>0</b>     | 0        | 0  |
| Beryllium | ppm    | ASTM D5185(m) |         | <b>0</b>     | 0        | 0  |
| Cadmium   | ppm    | ASTM D5185(m) |         | <b>0</b>     | 0        | 0  |

## ADDITIVES

|            | method | limit/base    | current | history1     | history2 |      |
|------------|--------|---------------|---------|--------------|----------|------|
| Boron      | ppm    | ASTM D5185(m) | 0       | <b>1</b>     | 4        | 2    |
| Barium     | ppm    | ASTM D5185(m) | 0       | <b>0</b>     | 0        | 0    |
| Molybdenum | ppm    | ASTM D5185(m) | 60      | <b>57</b>    | 57       | 58   |
| Manganese  | ppm    | ASTM D5185(m) | 0       | <b>&lt;1</b> | <1       | <1   |
| Magnesium  | ppm    | ASTM D5185(m) | 1010    | <b>920</b>   | 931      | 922  |
| Calcium    | ppm    | ASTM D5185(m) | 1070    | <b>980</b>   | 1049     | 1063 |
| Phosphorus | ppm    | ASTM D5185(m) | 1150    | <b>920</b>   | 1058     | 1015 |
| Zinc       | ppm    | ASTM D5185(m) | 1270    | <b>1128</b>  | 1148     | 1171 |
| Sulfur     | ppm    | ASTM D5185(m) | 2060    | <b>2307</b>  | 2626     | 2428 |
| Lithium    | ppm    | ASTM D5185(m) |         | <b>&lt;1</b> | <1       | <1   |

## CONTAMINANTS


|           | method | limit/base    | current | history1 | history2 |   |
|-----------|--------|---------------|---------|----------|----------|---|
| Silicon   | ppm    | ASTM D5185(m) | >20     | <b>6</b> | 4        | 8 |
| Sodium    | ppm    | ASTM D5185(m) |         | <b>6</b> | 2        | 2 |
| Potassium | ppm    | ASTM D5185(m) | >20     | <b>3</b> | 0        | 0 |

## INFRA-RED

|           | method   | limit/base  | current | history1    | history2 |      |
|-----------|----------|-------------|---------|-------------|----------|------|
| Soot %    | %        | ASTM D7844* | >3      | <b>0.4</b>  | 0        | 0.1  |
| Nitration | Abs/cm   | ASTM D7624* | >20     | <b>9.6</b>  | 5.8      | 5.9  |
| Sulfation | Abs/.1mm | ASTM D7415* | >30     | <b>21.6</b> | 19.8     | 17.6 |



# OIL ANALYSIS REPORT

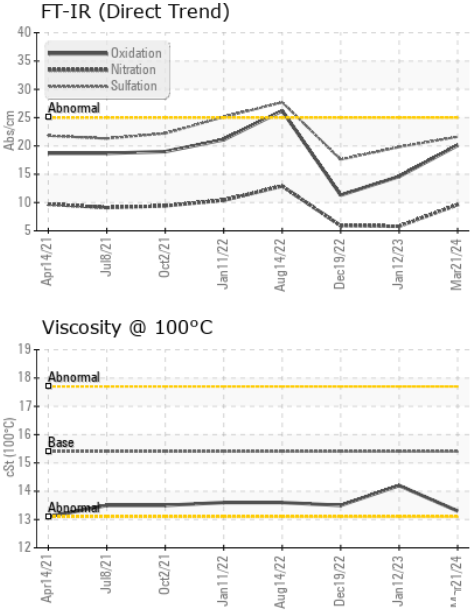


| FLUID DEGRADATION |          | method      | limit/base | current     | history1 | history2 |
|-------------------|----------|-------------|------------|-------------|----------|----------|
| Oxidation         | Abs./1mm | ASTM D7414* | >25        | <b>20.1</b> | 14.6     | 11.3     |

| VISUAL           |        | method  | limit/base | current      | history1 | history2 |
|------------------|--------|---------|------------|--------------|----------|----------|
| White Metal      | scalar | Visual* | NONE       | <b>NONE</b>  | ---      | ---      |
| Yellow Metal     | scalar | Visual* | NONE       | <b>NONE</b>  | ---      | ---      |
| Precipitate      | scalar | Visual* | NONE       | <b>NONE</b>  | ---      | ---      |
| Silt             | scalar | Visual* | NONE       | <b>VLITE</b> | ---      | ---      |
| Debris           | scalar | Visual* | NONE       | <b>VLITE</b> | ---      | ---      |
| Sand/Dirt        | scalar | Visual* | NONE       | <b>NONE</b>  | ---      | ---      |
| Appearance       | scalar | Visual* | NORML      | <b>NORML</b> | ---      | ---      |
| Odor             | scalar | Visual* | NORML      | <b>NORML</b> | NORML    | NORML    |
| Emulsified Water | scalar | Visual* | >0.2       | <b>NEG</b>   | NEG      | NEG      |
| Free Water       | scalar | Visual* |            | <b>NEG</b>   | NEG      | NEG      |

| FLUID PROPERTIES |     | method        | limit/base | current     | history1 | history2 |
|------------------|-----|---------------|------------|-------------|----------|----------|
| Visc @ 100°C     | cSt | ASTM D7279(m) | 15.4       | <b>13.3</b> | 14.2     | 13.5     |

## GRAPHS

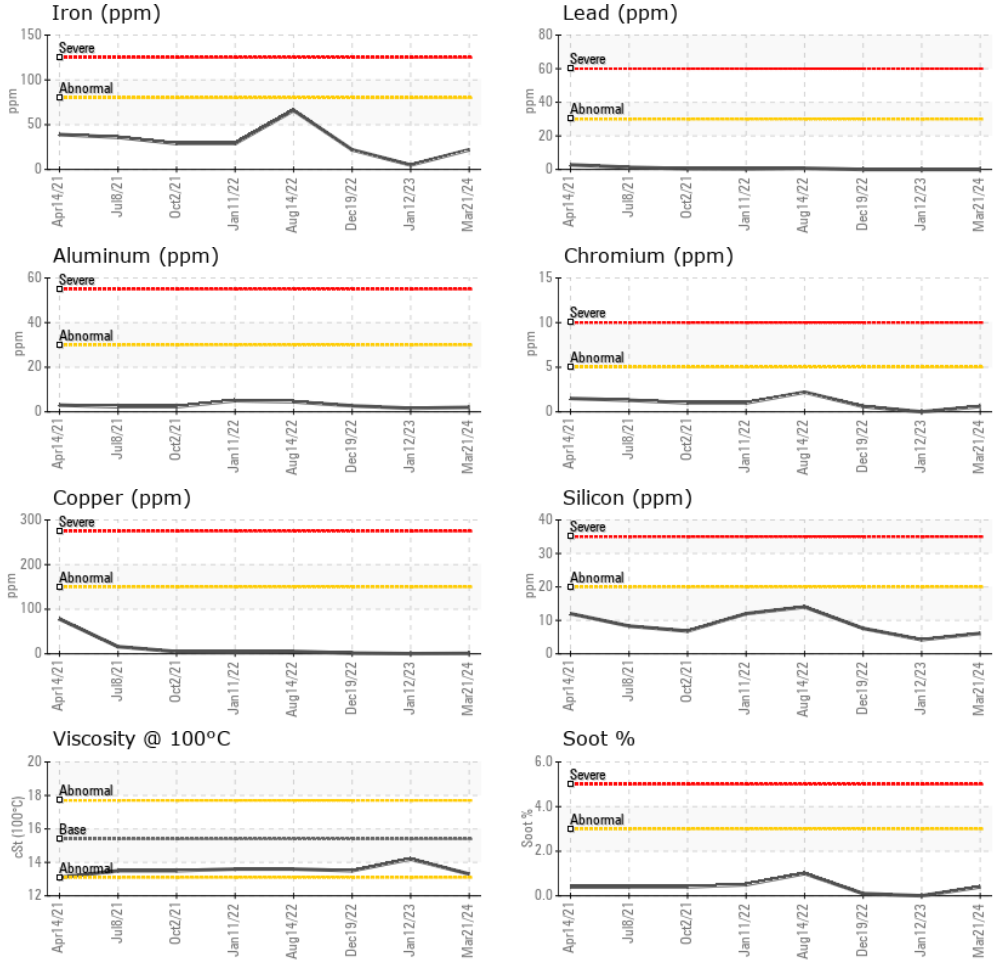

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0080089  
**Lab Number** : **02636847**  
**Unique Number** : 5786009  
**Test Package** : MOB 1 ( Additional Tests: Visual )

**GFL Environmental - 577 - First Class**  
 8540 Chilliwack Mountain Rd,  
 Chilliwack, BC  
 CA V2R 3W8  
 Contact: Derek Jessop  
 djessop@gflenv.com  
 T: (604)798-5301  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.