




# OIL ANALYSIS REPORT

Sample Rating Trend

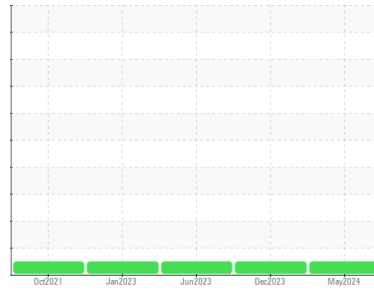

**NORMAL**



Machine Id  
**831015**  
 Component  
**Natural Gas Engine**  
 Fluid  
**CASTROL 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0100749</b>	GFL0100757	GFL0079581
Sample Date	Client Info		<b>16 May 2024</b>	05 Dec 2023	07 Jun 2023
Machine Age	kms	Client Info	<b>97345</b>	80239	26650
Oil Age	kms	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	Changed	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>50	<b>13</b>	16	11
Chromium	ppm	ASTM D5185(m)	>4	<b>1</b>	2	<1
Nickel	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	1	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185(m)	>9	<b>1</b>	2	2
Lead	ppm	ASTM D5185(m)	>30	<b>3</b>	5	<1
Copper	ppm	ASTM D5185(m)	>35	<b>&lt;1</b>	1	1
Tin	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	<1	<1
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)		<b>8</b>	6	7
Barium	ppm	ASTM D5185(m)		<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185(m)		<b>54</b>	56	53
Manganese	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185(m)		<b>555</b>	586	548
Calcium	ppm	ASTM D5185(m)		<b>1697</b>	1709	1600
Phosphorus	ppm	ASTM D5185(m)		<b>730</b>	740	714
Zinc	ppm	ASTM D5185(m)		<b>950</b>	961	897
Sulfur	ppm	ASTM D5185(m)		<b>2007</b>	2006	2020
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>+100	<b>2</b>	4	3
Sodium	ppm	ASTM D5185(m)	>406	<b>2</b>	3	2
Potassium	ppm	ASTM D5185(m)	>20	<b>0</b>	<1	<1

## INFRA-RED



	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*		<b>0</b>	0	0
Nitration	Abs/cm	ASTM D7624*	>20	<b>11.8</b>	12.7	11.3
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>25.5</b>	27.2	22.8

## FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>20.6</b>	23.0	19.2











# OIL ANALYSIS REPORT

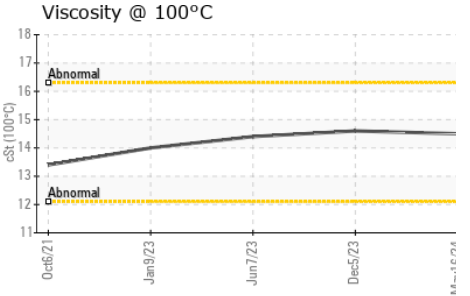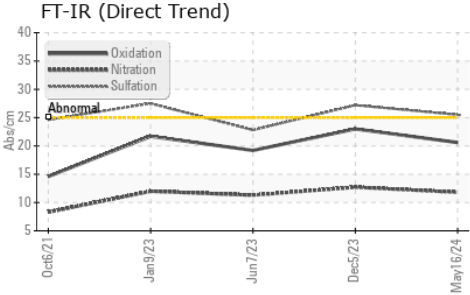

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	14.5	14.6	14.4

## GRAPHS

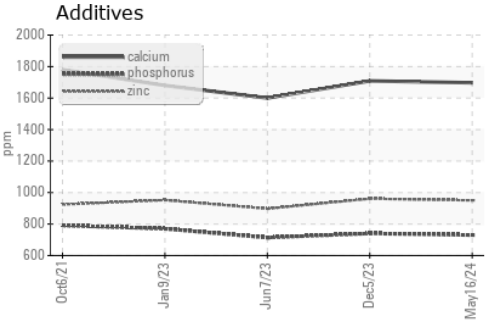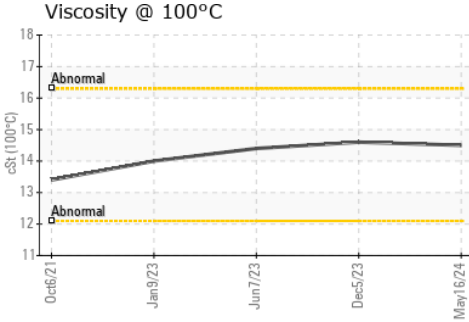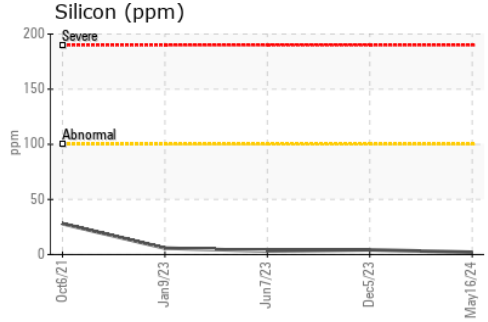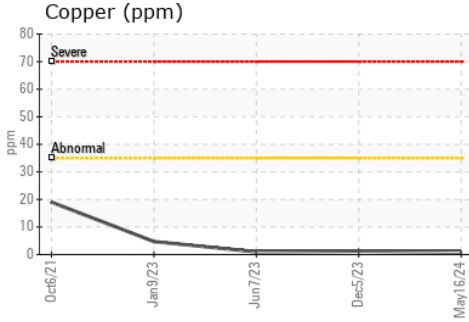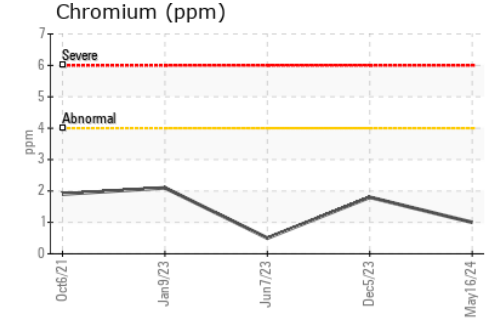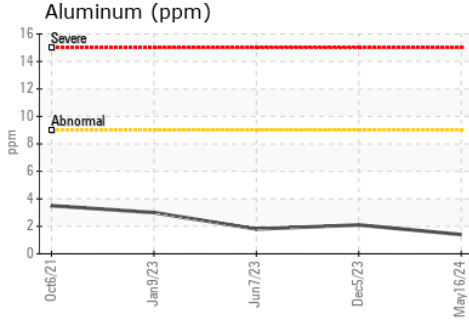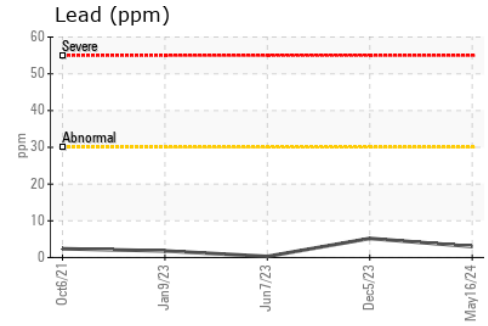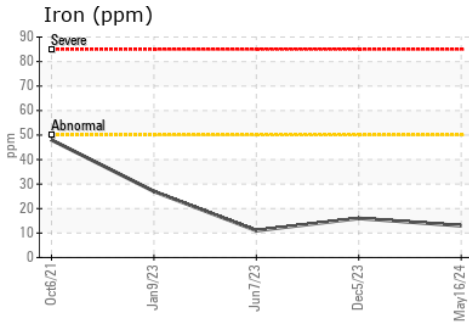

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9    **GFL Environmental - 277 - Niagara Regional**  
**Sample No.** : GFL0100749    **Received** : 22 May 2024    C/O Metro Truck Niagara Inc., 411 Glendale Avenue  
**Lab Number** : 02636858    **Tested** : 22 May 2024    St. Catharines, ON  
**Unique Number** : 5786020    **Diagnosed** : 22 May 2024 - Kevin Marson    CA L2P 3Y1  
**Test Package** : MOB 1

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.