




# OIL ANALYSIS REPORT

Sample Rating Trend

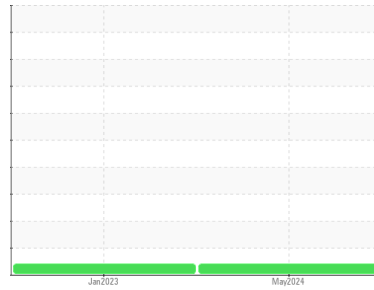

VISCOSITY



Machine Id  
**OR874**  
 Component  
**Transmission (Auto)**  
 Fluid  
**PETRO CANADA DURATRAN (--- GAL)**

## DIAGNOSIS

### ▲ Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the fluid.

### ▲ Fluid Condition

Viscosity of sample indicates oil is within SAE 70W80 range, advise investigate. The condition of the fluid is acceptable for the time in service.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2 |
|---------------|-------------|-------------|--------------------|-------------|----------|
| Sample Number | Client Info |             | <b>GFL0100615</b>  | GFL0054606  | ---      |
| Sample Date   | Client Info |             | <b>19 May 2024</b> | 25 Jan 2023 | ---      |
| Machine Age   | hrs         | Client Info | <b>15203</b>       | 13773       | ---      |
| Oil Age       | hrs         | Client Info | <b>1430</b>        | 1096        | ---      |
| Oil Changed   | Client Info |             | <b>Changed</b>     | Changed     | ---      |
| Sample Status |             |             | <b>ABNORMAL</b>    | ABNORMAL    | ---      |

## CONTAMINATION

|       | method    | limit/base | current    | history1 | history2 |
|-------|-----------|------------|------------|----------|----------|
| Water | WC Method | >0.1       | <b>NEG</b> | NEG      | ---      |

## WEAR METALS

|           | method | limit/base         | current   | history1 | history2 |
|-----------|--------|--------------------|-----------|----------|----------|
| Iron      | ppm    | ASTM D5185(m) >160 | <b>14</b> | 26       | ---      |
| Chromium  | ppm    | ASTM D5185(m) >5   | <b>0</b>  | 0        | ---      |
| Nickel    | ppm    | ASTM D5185(m) >5   | <b>0</b>  | <1       | ---      |
| Titanium  | ppm    | ASTM D5185(m)      | <b>0</b>  | <1       | ---      |
| Silver    | ppm    | ASTM D5185(m) >5   | <b>0</b>  | 0        | ---      |
| Aluminum  | ppm    | ASTM D5185(m) >50  | <b>2</b>  | 2        | ---      |
| Lead      | ppm    | ASTM D5185(m) >50  | <b>0</b>  | <1       | ---      |
| Copper    | ppm    | ASTM D5185(m) >225 | <b>4</b>  | 7        | ---      |
| Tin       | ppm    | ASTM D5185(m) >10  | <b>0</b>  | 0        | ---      |
| Antimony  | ppm    | ASTM D5185(m)      | <b>0</b>  | 0        | ---      |
| Vanadium  | ppm    | ASTM D5185(m)      | <b>0</b>  | 0        | ---      |
| Beryllium | ppm    | ASTM D5185(m)      | <b>0</b>  | 0        | ---      |
| Cadmium   | ppm    | ASTM D5185(m)      | <b>0</b>  | 0        | ---      |

## ADDITIVES

|            | method | limit/base         | current      | history1 | history2 |
|------------|--------|--------------------|--------------|----------|----------|
| Boron      | ppm    | ASTM D5185(m) 110  | <b>83</b>    | 85       | ---      |
| Barium     | ppm    | ASTM D5185(m) 0.0  | <b>0</b>     | 0        | ---      |
| Molybdenum | ppm    | ASTM D5185(m) 0.0  | <b>0</b>     | <1       | ---      |
| Manganese  | ppm    | ASTM D5185(m) 1    | <b>&lt;1</b> | <1       | ---      |
| Magnesium  | ppm    | ASTM D5185(m) 13   | <b>12</b>    | 13       | ---      |
| Calcium    | ppm    | ASTM D5185(m) 3610 | <b>3205</b>  | 3264     | ---      |
| Phosphorus | ppm    | ASTM D5185(m) 1192 | <b>1095</b>  | 1231     | ---      |
| Zinc       | ppm    | ASTM D5185(m) 1455 | <b>1233</b>  | 1311     | ---      |
| Sulfur     | ppm    | ASTM D5185(m) 2641 | <b>2690</b>  | 3016     | ---      |
| Lithium    | ppm    | ASTM D5185(m)      | <b>&lt;1</b> | <1       | ---      |

## CONTAMINANTS

|           | method | limit/base        | current      | history1 | history2 |
|-----------|--------|-------------------|--------------|----------|----------|
| Silicon   | ppm    | ASTM D5185(m) >20 | <b>6</b>     | 8        | ---      |
| Sodium    | ppm    | ASTM D5185(m)     | <b>2</b>     | 4        | ---      |
| Potassium | ppm    | ASTM D5185(m) >20 | <b>&lt;1</b> | <1       | ---      |

