




OIL ANALYSIS REPORT

Sample Rating Trend

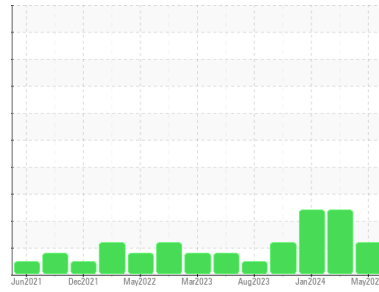

FUEL



Machine Id

816003

Component

Diesel Engine

Fluid

PETRO CANADA DURON SHP 15W40 (20 LTR)

DIAGNOSIS

Recommendation

The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0116856	GFL0116840	GFL0097440
Sample Date	Client Info		21 May 2024	12 Apr 2024	22 Jan 2024
Machine Age	hrs	Client Info	0	0	0
Oil Age	hrs	Client Info	500	500	500
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			ABNORMAL	SEVERE	SEVERE

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>100	22	24	21
Chromium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	<1	0	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>3	0	0	0
Aluminum	ppm	ASTM D5185(m)	>20	1	2	3
Lead	ppm	ASTM D5185(m)	>40	0	0	0
Copper	ppm	ASTM D5185(m)	>330	<1	<1	<1
Tin	ppm	ASTM D5185(m)	>15	0	0	0
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	0	3	2	2
Barium	ppm	ASTM D5185(m)	0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	60	53	50	53
Manganese	ppm	ASTM D5185(m)	0	<1	<1	0
Magnesium	ppm	ASTM D5185(m)	1010	870	815	841
Calcium	ppm	ASTM D5185(m)	1070	946	855	923
Phosphorus	ppm	ASTM D5185(m)	1150	886	836	899
Zinc	ppm	ASTM D5185(m)	1270	1071	987	1035
Sulfur	ppm	ASTM D5185(m)	2060	2140	2012	2280
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS




	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>25	3	3	5
Sodium	ppm	ASTM D5185(m)		2	3	3
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	6
Fuel	%	ASTM D7593*	>5	▲ 6	▲ 10.9	▲ 8.2

INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>3	0.5	0.6	0.5
Nitration	Abs/cm	ASTM D7624*	>20	11.4	12.6	11.5
Sulfation	Abs/.1mm	ASTM D7415*	>30	22.8	24.0	22.8



OIL ANALYSIS REPORT






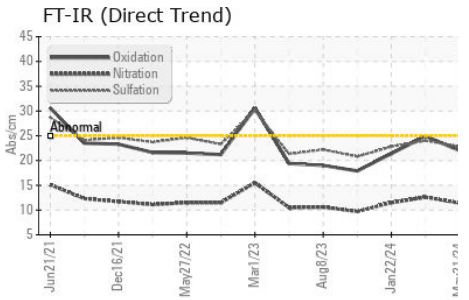
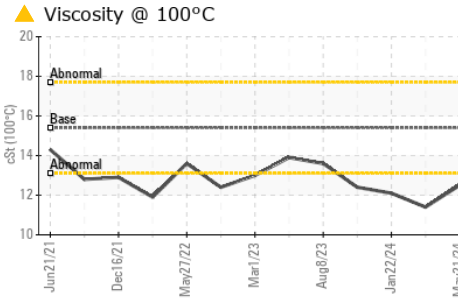
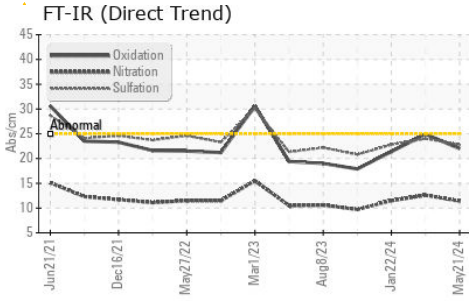


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	22.0	24.9	21.4

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	▲ 12.5	▲ 11.4	▲ 12.1

GRAPHS

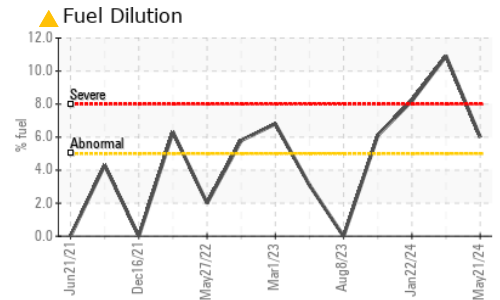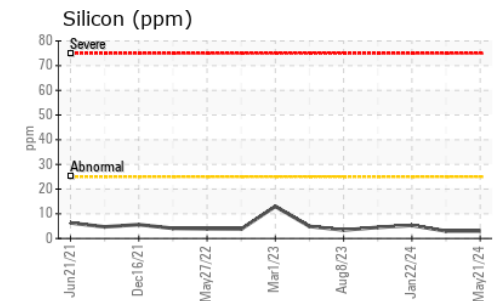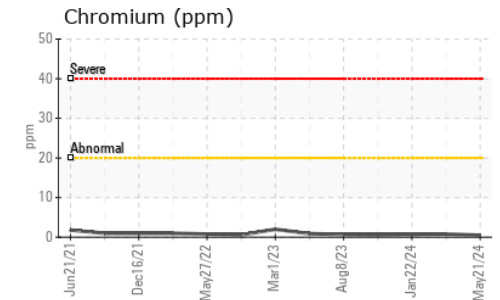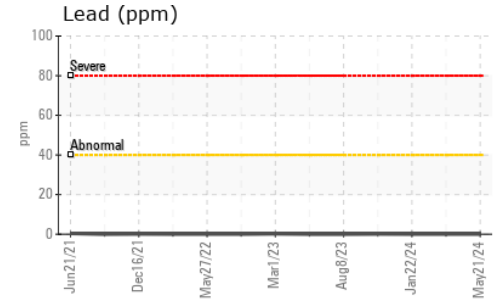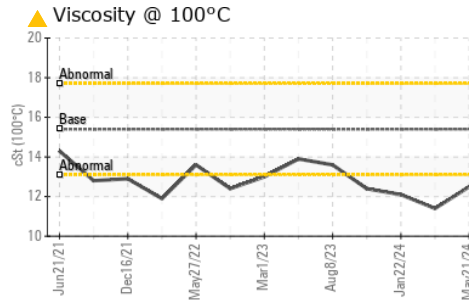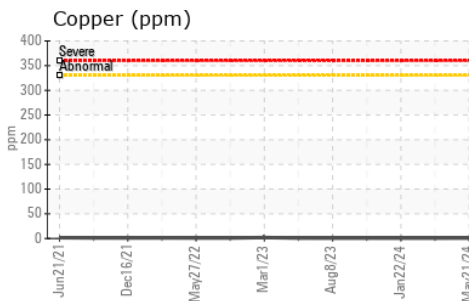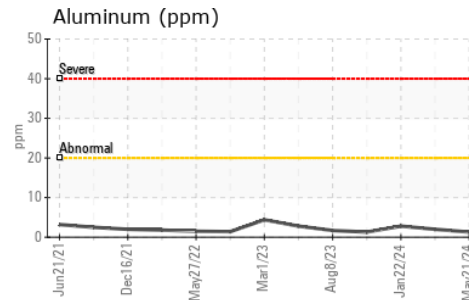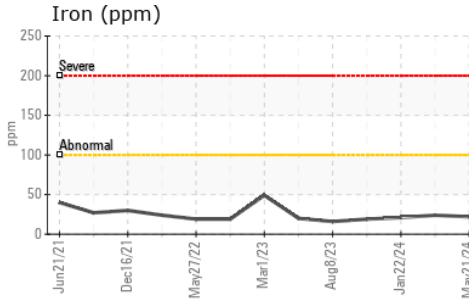

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0116856
Lab Number : 02637083
Unique Number : 5786245
Test Package : MOB 1 (Additional Tests: PercentFuel)

GFL Environmental - 221 - Windsor
 905 Tecumseh Road W
 Windsor, ON
 CA N8W 4J5
 Contact: Pamela-Jean Butler
 pamelajeau.butler@gflenv.com
 T: (519)948-8126
 F:

Received : 23 May 2024
 Tested : 24 May 2024
 Diagnosed : 24 May 2024 - Wes Davis
 To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.