




# OIL ANALYSIS REPORT

Sample Rating Trend

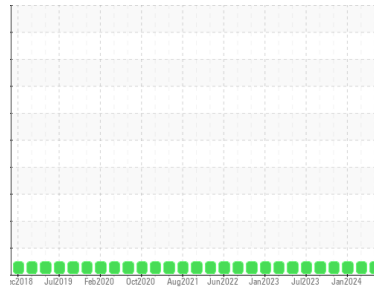

**NORMAL**



Machine Id  
**901090**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (36 LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0113294</b>	GFL0113280	GFL0097588
Sample Date	Client Info		<b>23 May 2024</b>	11 Apr 2024	16 Jan 2024
Machine Age	hrs	Client Info	<b>0</b>	16414	16414
Oil Age	hrs	Client Info	<b>0</b>	16414	592
Oil Changed	Client Info		<b>N/A</b>	N/A	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>120	<b>8</b>	7	6
Chromium	ppm	ASTM D5185(m)	>20	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m)	>5	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185(m)	>2	<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>20	<b>1</b>	2	2
Lead	ppm	ASTM D5185(m)	>40	<b>0</b>	0	<1
Copper	ppm	ASTM D5185(m)	>330	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185(m)	>15	<b>0</b>	0	0
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	0	<b>4</b>	3	3
Barium	ppm	ASTM D5185(m)	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	60	<b>61</b>	61	58
Manganese	ppm	ASTM D5185(m)	0	<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185(m)	1010	<b>990</b>	988	936
Calcium	ppm	ASTM D5185(m)	1070	<b>1064</b>	1066	1055
Phosphorus	ppm	ASTM D5185(m)	1150	<b>1000</b>	1000	1001
Zinc	ppm	ASTM D5185(m)	1270	<b>1197</b>	1201	1144
Sulfur	ppm	ASTM D5185(m)	2060	<b>2513</b>	2500	2633
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

## CONTAMINANTS



	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>25	<b>1</b>	2	2
Sodium	ppm	ASTM D5185(m)		<b>2</b>	2	2
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	2

## INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>4	<b>0.5</b>	0.4	0.5
Nitration	Abs/cm	ASTM D7624*	>20	<b>8.5</b>	9.1	9.2
Sulfation	Abs.1mm	ASTM D7415*	>30	<b>20.0</b>	19.8	20.2



# OIL ANALYSIS REPORT







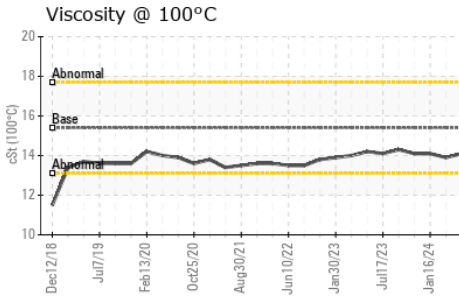
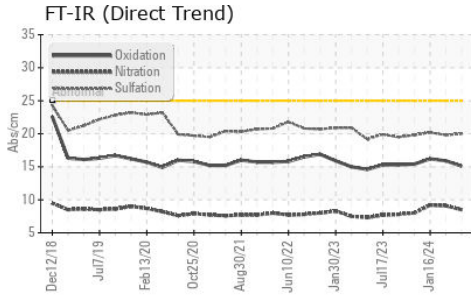


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs./1mm	ASTM D7414*	>25	15.1	15.9	16.2

VISUAL	method	limit/base	current	history1	history2	
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	14.1	13.9	14.1

## GRAPHS

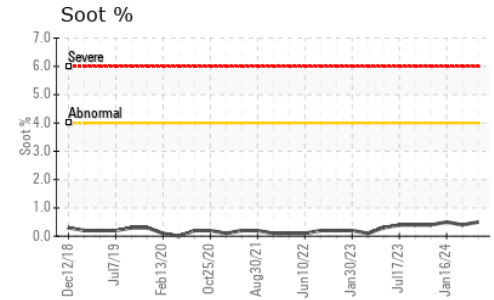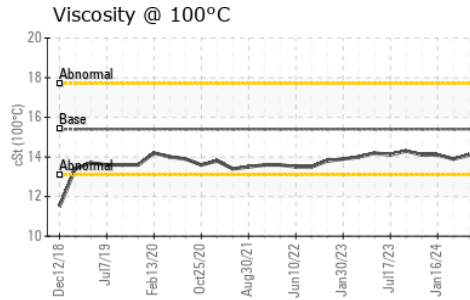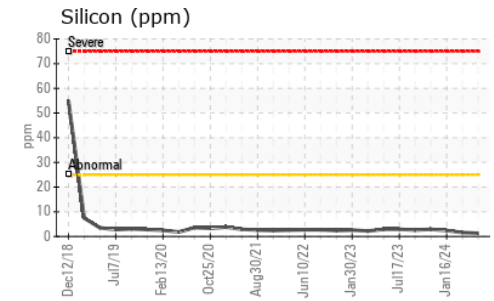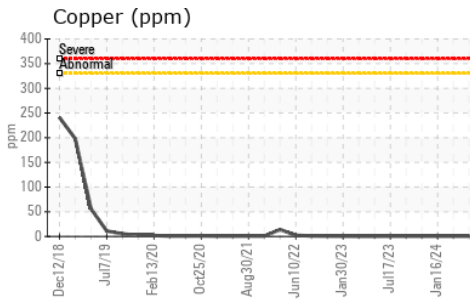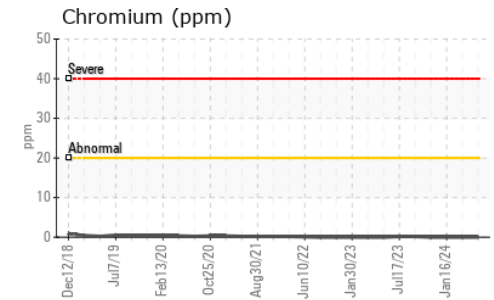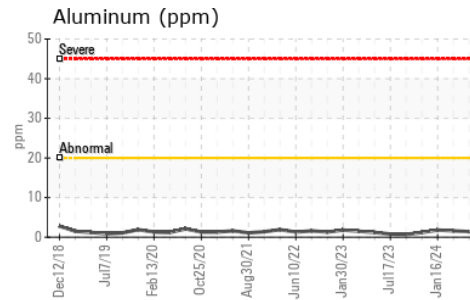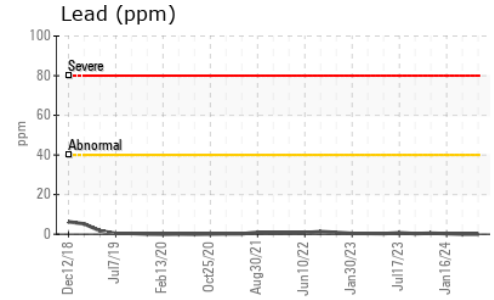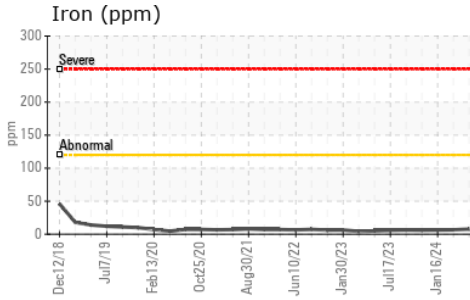

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0113294  
**Lab Number** : 02637419  
**Unique Number** : 5786581  
**Test Package** : MOB 1

**Received** : 24 May 2024  
**Tested** : 24 May 2024  
**Diagnosed** : 24 May 2024 - Wes Davis

**GFL Environmental - 216**  
 15 Bermondsey Road  
 Toronto, ON  
 CA M4B 1Y9

Contact: Tom Hatzioannidis  
 thatzioannidis@gflenv.com  
 T: (416)678-9340  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.