


OIL ANALYSIS REPORT

[450331578]

IH-65205-S1 HP URC HYDRAULIC POWER

Hydraulic System

{not provided} (--- GAL)





DIAGNOSIS

Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PC0080756	PC	PC0080327
Sample Date		Client Info		08 May 2024	10 Apr 2024	19 Jan 2024
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
CONTAMINAT	ION	method	limit/base	current	history1	history2
Water		WC Method	>0.05	NEG	NEG	NEG
WEAR METAL	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	2	2	2
Chromium	ppm	ASTM D5185(m)	>10	0	0	0
Nickel	ppm	ASTM D5185(m)	>10	0	0	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		0	0	0
Aluminum	ppm	ASTM D5185(m)	>10	0	<1	<1
Lead	ppm	ASTM D5185(m)	>20	0	0	<1
Copper	ppm	ASTM D5185(m)	>20	4	4	3
Tin	ppm	ASTM D5185(m)	>10	0	0	0
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<1	<1	0
Barium	ppm	ASTM D5185(m)		<1	<1	0
Molybdenum	ppm	ASTM D5185(m)		0	0	0
Manganese	ppm	ASTM D5185(m)		0	0	0
Magnesium	ppm	ASTM D5185(m)		0	<1	0
Calcium	ppm	ASTM D5185(m)		3	4	5
Phosphorus	ppm	ASTM D5185(m)		318	317	315
Zinc	ppm	ASTM D5185(m)		37	38	40
Sulfur	ppm	ASTM D5185(m)		3113	3101	3228
Lithium	ppm	ASTM D5185(m)		<1	<1	<1
CONTAMINAN	TS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	0	0	<1
Sodium	ppm	ASTM D5185(m)		<1	<1	<1
Potassium	ppm	ASTM D5185(m)	>20	0	<1	<1
FLUID CLEANL	INESS	method	limit/base	current	history1	history2
Particles >4μm		ASTM D7647	>5000	1448	1082	2552
Particles >6μm		ASTM D7647		187	242	494
Particles >14µm		ASTM D7647	>160	8	31	32
· · · · · · · · · · · · · · · · · · ·				-		
Particles >21um		ASTM D7647	>40	2	11	9
Particles >21µm Particles >38um		ASTM D7647 ASTM D7647		2 0	11 1	9
Particles >21μm Particles >38μm Particles >71μm		ASTM D7647 ASTM D7647 ASTM D7647	>10	2 0 0	11 1 0	9 2 1

ISO 4406 (c) >19/17/14

Oil Cleanliness


19/16/12

17/15/12

Contact/Location: Josh Hynes - TERHAM



OIL ANALYSIS REPORT

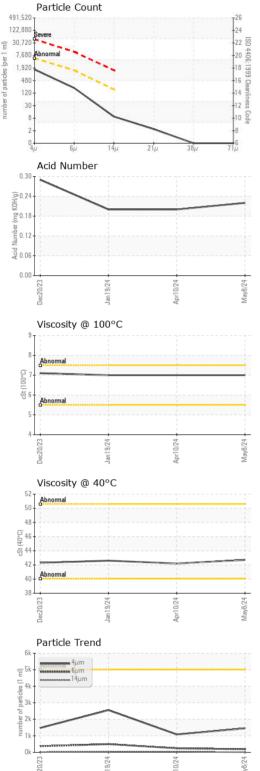

FLUID DEGRAD	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		0.22	0.20	0.20
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	VLITE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.05	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG
FLUID PROPE	RTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)		42.7	42.2	42.6
Visc @ 100°C	cSt	ASTM D7279(m)		7.0	7.0	7
Viscosity Index (VI)	Scale	ASTM D2270*		123	125	123
SAMPLE IMAG	iES	method	limit/base	current	history1	history2
Color						
Bottom						The second secon



CALA ISO 17025:2017 Accredited Laboratory

Laboratory

Sample No. Lab Number : 02638303 Unique Number : 5787465

: PC0080756

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9

Received : 28 May 2024 **Tested** : 30 May 2024 Diagnosed : 30 May 2024 - Kevin Marson

Test Package : MAR 2 (Additional Tests: KV100, TAN Man, VI) To discuss this sample report, contact Customer Service at 1-800-268-2131.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

Suncor - Terra Nova Projects Scotia Centre, 235 Water Strret

St. John's, NL CA A1C 1B6

Contact: Josh Hynes joshynes@suncor.com T: (709)778-3575

F: (709)724-2835

Report Id: TERHAM [WCAMIS] 02638303 (Generated: 05/30/2024 10:33:31) Rev: 1

Contact/Location: Josh Hynes - TERHAM