




# OIL ANALYSIS REPORT

Sample Rating Trend

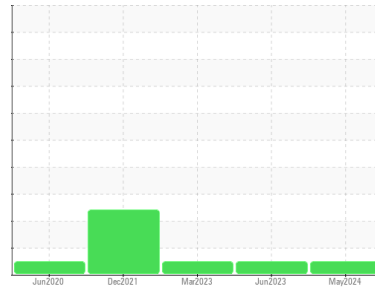

**NORMAL**



Machine Id  
**Or562**  
 Component  
**Transmission (Auto)**  
 Fluid  
**PETRO CANADA DURATRAN (--- GAL)**

## DIAGNOSIS

### Recommendation

Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the fluid.

### Fluid Condition

Additive levels indicate the addition of a different brand, or type of fluid. Viscosity of sample indicates oil is within SAE 10W range, advise investigate. The condition of the fluid is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>GFL0113401</b>	GFL0056410	GFL0064904
Sample Date	Client Info			<b>28 May 2024</b>	14 Jun 2023	16 Mar 2023
Machine Age	hrs	Client Info		<b>22198</b>	20535	19981
Oil Age	hrs	Client Info		<b>22198</b>	1554	1000
Oil Changed	Client Info			<b>N/A</b>	Not Changd	Not Changd
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.1	<b>NEG</b>	NEG	NEG



WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>160	<b>58</b>	38	33
Chromium	ppm	ASTM D5185(m)	>5	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m)	>5	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>5	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>50	<b>46</b>	31	28
Lead	ppm	ASTM D5185(m)	>50	<b>0</b>	<1	0
Copper	ppm	ASTM D5185(m)	>225	<b>4</b>	4	3
Tin	ppm	ASTM D5185(m)	>10	<b>2</b>	1	1
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	110	<b>121</b>	121	123
Barium	ppm	ASTM D5185(m)	0.0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	0.0	<b>0</b>	1	1
Manganese	ppm	ASTM D5185(m)	1	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185(m)	13	<b>16</b>	15	15
Calcium	ppm	ASTM D5185(m)	3610	<b>1089</b>	1122	1117
Phosphorus	ppm	ASTM D5185(m)	1192	<b>502</b>	559	563
Zinc	ppm	ASTM D5185(m)	1455	<b>388</b>	378	374
Sulfur	ppm	ASTM D5185(m)	2641	<b>1390</b>	1476	1455
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>20	<b>7</b>	7	6
Sodium	ppm	ASTM D5185(m)		<b>1</b>	1	1
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	0	<1




# OIL ANALYSIS REPORT

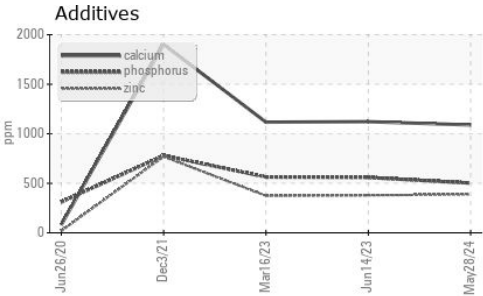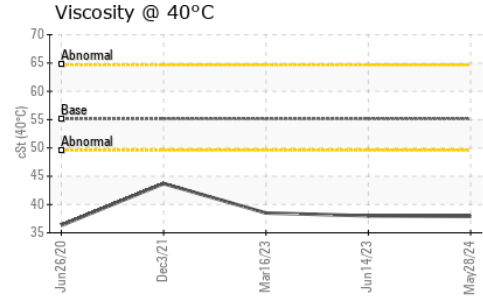



VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D7279(m)	55.14	<b>37.9</b>	38.0	38.5

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

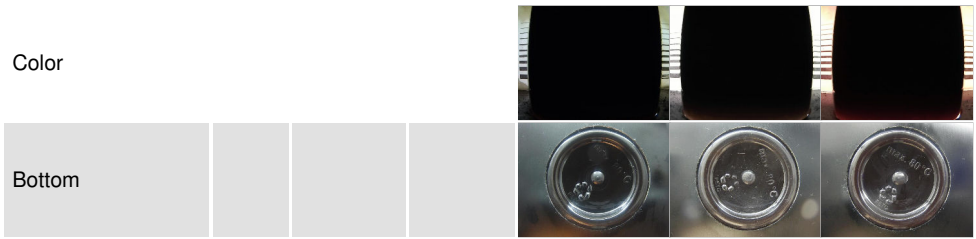

## GRAPHS

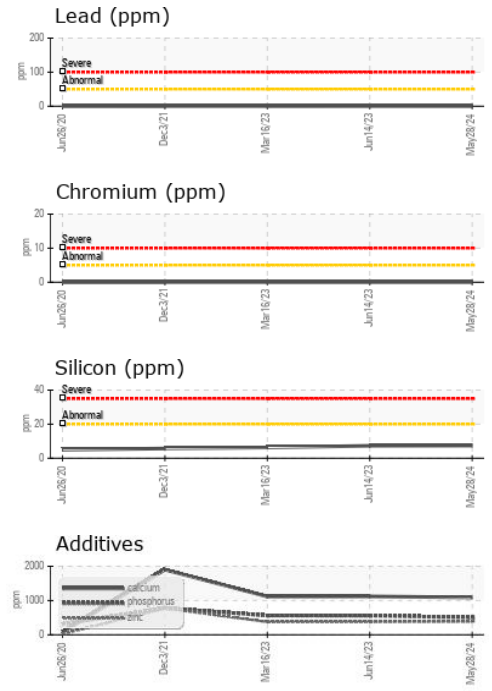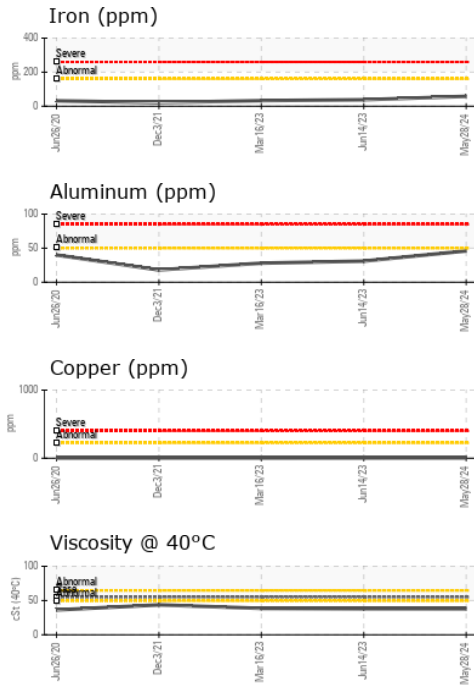

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0113401  
**Lab Number** : 02639207  
**Unique Number** : 5788369  
**Test Package** : MOB 1

**GFL Environmental - 720 - Lafleche - Landfill**  
 17125 Lafleche Road,  
 Moose Creek, ON  
 CA K0C 1W0  
 Contact: Charles Bergeron  
 cbergeron@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.