




# OIL ANALYSIS REPORT

Sample Rating Trend

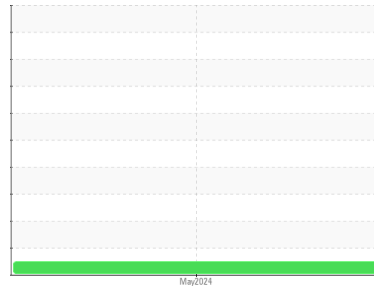

**NORMAL**



Machine Id

**PETERBILT 126055**

Component

**Diesel Engine**

Fluid

**SHELL ROTELLA T 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0109555</b>	---	---
Sample Date	Client Info		<b>28 May 2024</b>	---	---
Machine Age	hrs	Client Info	<b>11646</b>	---	---
Oil Age	hrs	Client Info	<b>600</b>	---	---
Oil Changed	Client Info		<b>Changed</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	---	---
Water	WC Method	>0.2	<b>NEG</b>	---	---
Glycol	WC Method		<b>NEG</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >110	<b>10</b>	---	---
Chromium	ppm	ASTM D5185(m) >4	<b>0</b>	---	---
Nickel	ppm	ASTM D5185(m) >2	<b>0</b>	---	---
Titanium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Silver	ppm	ASTM D5185(m) >2	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m) >25	<b>7</b>	---	---
Lead	ppm	ASTM D5185(m) >45	<b>0</b>	---	---
Copper	ppm	ASTM D5185(m) >85	<b>&lt;1</b>	---	---
Tin	ppm	ASTM D5185(m) >4	<b>0</b>	---	---
Antimony	ppm	ASTM D5185(m)	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 35	<b>128</b>	---	---
Barium	ppm	ASTM D5185(m) 0	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185(m) 0	<b>0</b>	---	---
Manganese	ppm	ASTM D5185(m) 0	<b>0</b>	---	---
Magnesium	ppm	ASTM D5185(m) 10	<b>14</b>	---	---
Calcium	ppm	ASTM D5185(m) 2340	<b>2319</b>	---	---
Phosphorus	ppm	ASTM D5185(m) 1110	<b>996</b>	---	---
Zinc	ppm	ASTM D5185(m) 1210	<b>1186</b>	---	---
Sulfur	ppm	ASTM D5185(m) 3890	<b>2823</b>	---	---
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >30	<b>2</b>	---	---
Sodium	ppm	ASTM D5185(m)	<b>2</b>	---	---
Potassium	ppm	ASTM D5185(m) >20	<b>24</b>	---	---

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844* >3	<b>0</b>	---	---
Nitration	Abs/cm	ASTM D7624* >20	<b>8.5</b>	---	---
Sulfation	Abs/.1mm	ASTM D7415* >30	<b>22.8</b>	---	---

