




OIL ANALYSIS REPORT



Machine Id
412029
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (36 LTR)

Sample Rating Trend

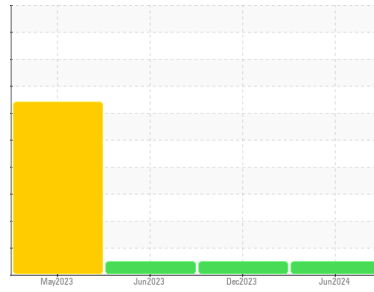

NORMAL



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | GFL0118950 | GFL0094385 | GFL0055421 |
| Sample Date | Client Info | | 05 Jun 2024 | 15 Dec 2023 | 02 Jun 2023 |
| Machine Age | hrs | Client Info | 1654 | 2751 | 1620 |
| Oil Age | hrs | Client Info | 1654 | 2751 | 0 |
| Oil Changed | Client Info | | Changed | Changed | Changed |
| Sample Status | | | NORMAL | NORMAL | NORMAL |

CONTAMINATION

| | method | limit/base | current | history1 | history2 |
|--------|-----------|------------|----------------|----------|----------|
| Fuel | WC Method | >3.0 | <1.0 | <1.0 | <1.0 |
| Water | WC Method | >0.2 | NEG | NEG | NEG |
| Glycol | WC Method | | NEG | NEG | NEG |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|--------------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185(m) >120 | 24 | 13 | 9 |
| Chromium | ppm | ASTM D5185(m) >20 | <1 | <1 | 0 |
| Nickel | ppm | ASTM D5185(m) >5 | 2 | 2 | <1 |
| Titanium | ppm | ASTM D5185(m) >2 | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185(m) >2 | 0 | <1 | <1 |
| Aluminum | ppm | ASTM D5185(m) >20 | 6 | 5 | 2 |
| Lead | ppm | ASTM D5185(m) >40 | 1 | 2 | 1 |
| Copper | ppm | ASTM D5185(m) >330 | 8 | 21 | 25 |
| Tin | ppm | ASTM D5185(m) >15 | 1 | <1 | <1 |
| Antimony | ppm | ASTM D5185(m) | 0 | 0 | <1 |
| Vanadium | ppm | ASTM D5185(m) | 0 | 0 | 0 |
| Beryllium | ppm | ASTM D5185(m) | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185(m) | 0 | 0 | 0 |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|--------|--------------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185(m) 0 | 4 | 6 | 12 |
| Barium | ppm | ASTM D5185(m) 0 | 0 | <1 | 0 |
| Molybdenum | ppm | ASTM D5185(m) 60 | 62 | 61 | 58 |
| Manganese | ppm | ASTM D5185(m) 0 | <1 | 0 | <1 |
| Magnesium | ppm | ASTM D5185(m) 1010 | 904 | 954 | 886 |
| Calcium | ppm | ASTM D5185(m) 1070 | 1113 | 1110 | 1123 |
| Phosphorus | ppm | ASTM D5185(m) 1150 | 920 | 987 | 1031 |
| Zinc | ppm | ASTM D5185(m) 1270 | 1174 | 1167 | 1114 |
| Sulfur | ppm | ASTM D5185(m) 2060 | 2393 | 2566 | 2583 |
| Lithium | ppm | ASTM D5185(m) | <1 | <1 | <1 |

CONTAMINANTS



| | method | limit/base | current | history1 | history2 |
|-----------|--------|-------------------|-----------|----------|----------|
| Silicon | ppm | ASTM D5185(m) >25 | 2 | 3 | 4 |
| Sodium | ppm | ASTM D5185(m) | 2 | 2 | 1 |
| Potassium | ppm | ASTM D5185(m) >20 | 15 | 9 | 4 |

INFRA-RED

| | method | limit/base | current | history1 | history2 |
|-----------|----------|-----------------|-------------|----------|----------|
| Soot % | % | ASTM D7844* >4 | 0.3 | 0.2 | 0 |
| Nitration | Abs/cm | ASTM D7624* >20 | 10.2 | 8.4 | 5.4 |
| Sulfation | Abs./1mm | ASTM D7415* >30 | 20.8 | 18.9 | 18.3 |



OIL ANALYSIS REPORT

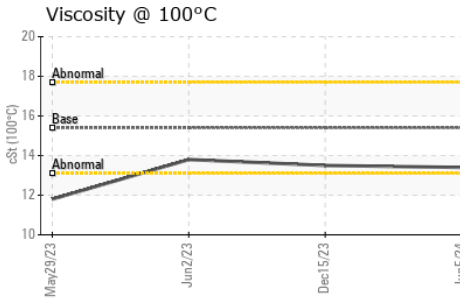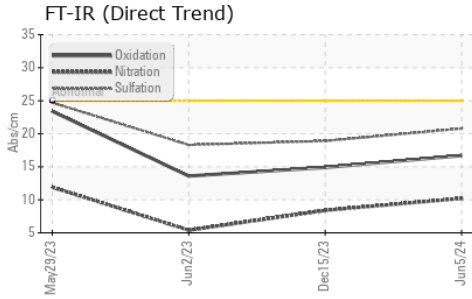

FLUID DEGRADATION

| | method | limit/base | current | history1 | history2 | |
|-----------|----------|-------------|---------|-------------|----------|------|
| Oxidation | Abs./1mm | ASTM D7414* | >25 | 16.7 | 14.9 | 13.6 |









VISUAL

| | method | limit/base | current | history1 | history2 | |
|------------------|--------|------------|---------|------------|----------|-----|
| Emulsified Water | scalar | Visual* | >0.2 | NEG | NEG | NEG |
| Free Water | scalar | Visual* | | NEG | NEG | NEG |

FLUID PROPERTIES

| | method | limit/base | current | history1 | history2 | |
|--------------|--------|---------------|---------|-------------|----------|------|
| Visc @ 100°C | cSt | ASTM D7279(m) | 15.4 | 13.4 | 13.5 | 13.8 |

GRAPHS

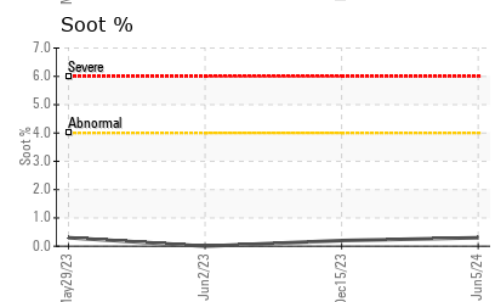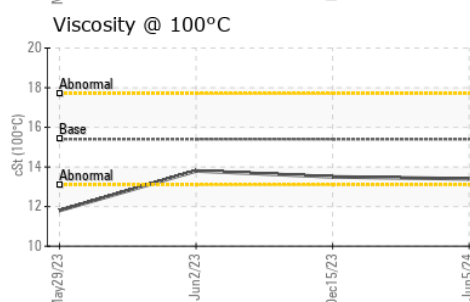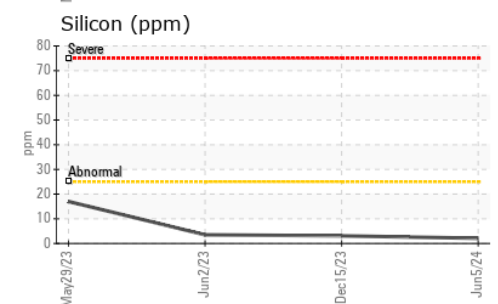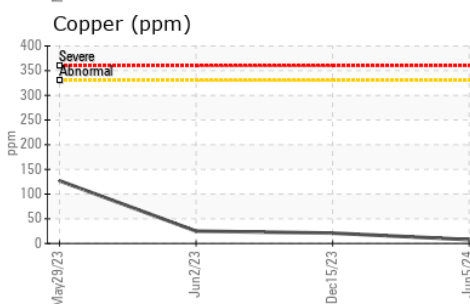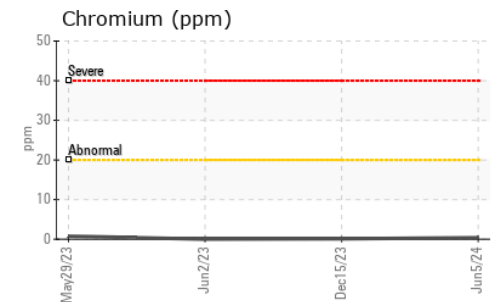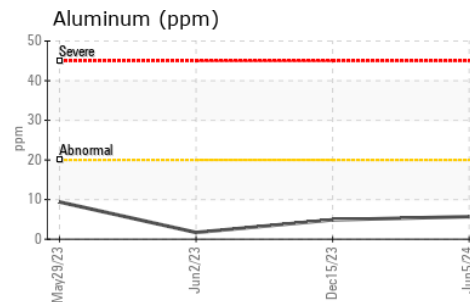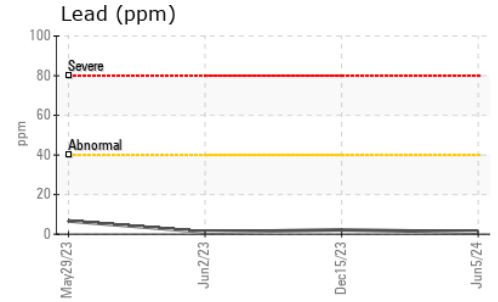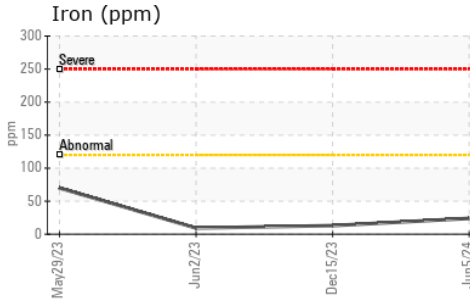

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0118950
Lab Number : **02640081**
Unique Number : 5789243
Test Package : MOB 1

GFL Environmental - 222 - Sandhill
 SANDHILL DISPOSAL & RECYCLING DIVIS, 19 COMMERCE ROAD
 ORANGEVILLE, ON
 CA L9W 3X5
 Contact: GLENN COOK
 gcook@gflenv.com
 T: (519)940-4167
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.