




OIL ANALYSIS REPORT

Sample Rating Trend

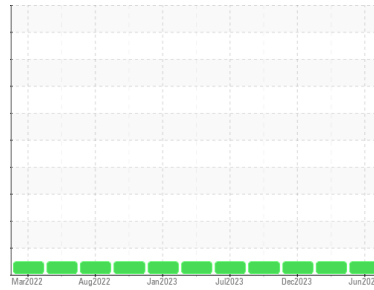

NORMAL



Machine Id

115002

Component

Diesel Engine

Fluid

PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0118538	GFL0110666	GFL0094551
Sample Date	Client Info		05 Jun 2024	22 Mar 2024	13 Dec 2023
Machine Age	hrs	Client Info	7647	7139	6602
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		Changed	N/A	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>100	19	14	17
Chromium	ppm	ASTM D5185(m)	>20	<1	<1	1
Nickel	ppm	ASTM D5185(m)	>4	0	0	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>3	0	0	<1
Aluminum	ppm	ASTM D5185(m)	>20	4	3	3
Lead	ppm	ASTM D5185(m)	>40	18	8	8
Copper	ppm	ASTM D5185(m)	>330	2	1	2
Tin	ppm	ASTM D5185(m)	>15	0	0	<1
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	0	2	3	3
Barium	ppm	ASTM D5185(m)	0	0	0	<1
Molybdenum	ppm	ASTM D5185(m)	60	66	63	65
Manganese	ppm	ASTM D5185(m)	0	<1	0	0
Magnesium	ppm	ASTM D5185(m)	1010	1084	1043	1055
Calcium	ppm	ASTM D5185(m)	1070	1168	1126	1206
Phosphorus	ppm	ASTM D5185(m)	1150	1067	1056	1049
Zinc	ppm	ASTM D5185(m)	1270	1315	1280	1320
Sulfur	ppm	ASTM D5185(m)	2060	2586	2553	2578
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS


	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>25	2	2	4
Sodium	ppm	ASTM D5185(m)		5	4	5
Potassium	ppm	ASTM D5185(m)	>20	8	4	6

INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>3	0.1	0.1	0.1
Nitration	Abs/cm	ASTM D7624*	>20	12.7	11.5	12.2
Sulfation	Abs./1mm	ASTM D7415*	>30	26.0	24.1	24.8



OIL ANALYSIS REPORT

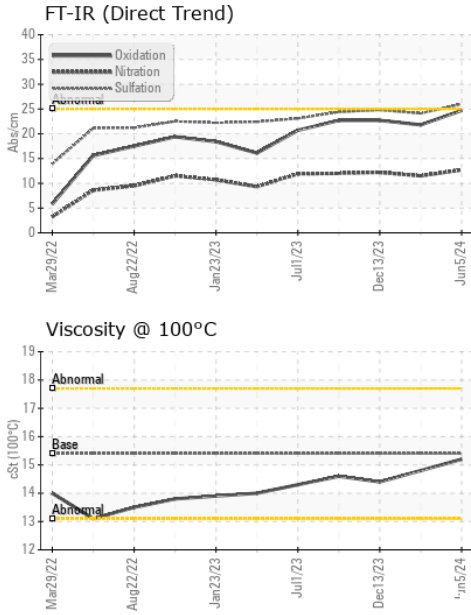

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs./1mm ASTM D7414*	>25	21.8	22.7


VISUAL

method	limit/base	current	history1	history2
White Metal	scalar Visual*	NONE	---	---
Yellow Metal	scalar Visual*	NONE	---	---
Precipitate	scalar Visual*	NONE	---	---
Silt	scalar Visual*	NONE	---	---
Debris	scalar Visual*	NONE	---	---
Sand/Dirt	scalar Visual*	NONE	---	---
Appearance	scalar Visual*	NORML	---	---
Odor	scalar Visual*	NORML	NORML	NORML
Emulsified Water	scalar Visual*	>0.2	NEG	NEG
Free Water	scalar Visual*		NEG	NEG

FLUID PROPERTIES

method	limit/base	current	history1	history2
Visc @ 100°C	cSt ASTM D7279(m)	15.4	15.2	14.8

GRAPHS

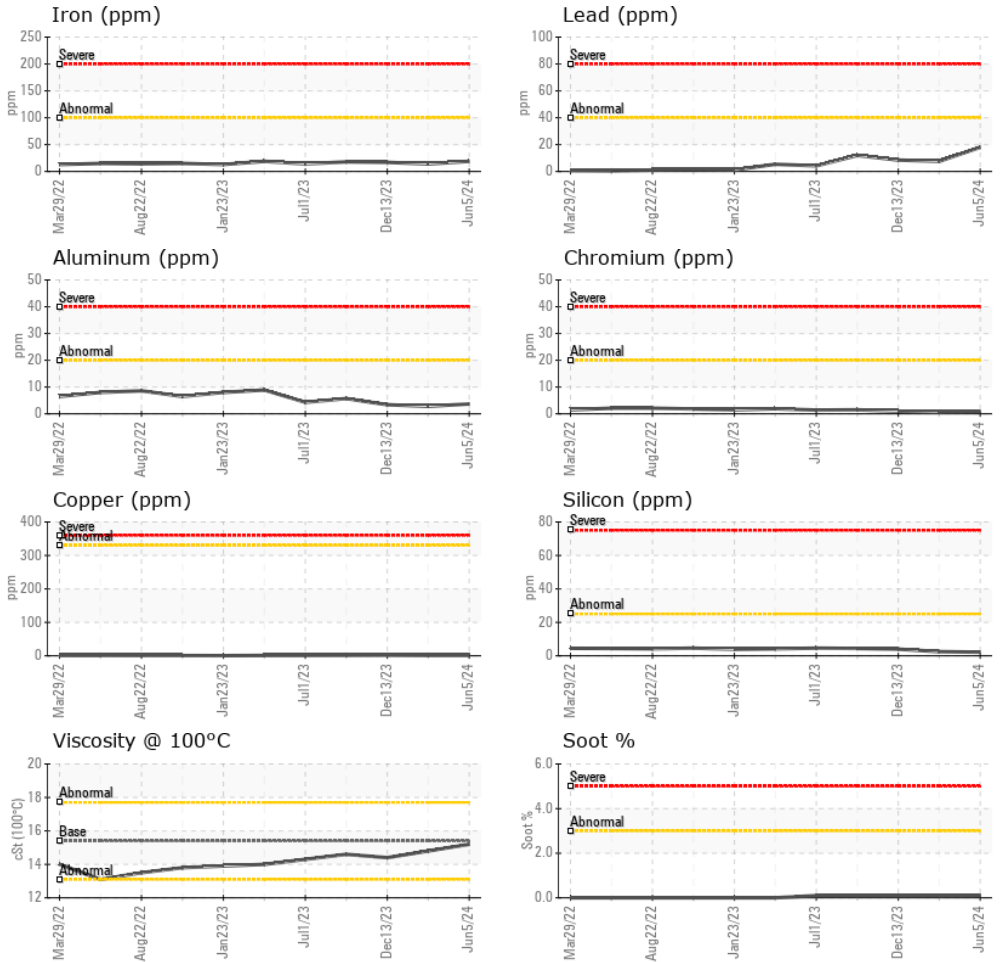

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0118538
Lab Number : 02640439
Unique Number : 5789601
Test Package : MOB 1 (Additional Tests: Visual)
Received : 07 Jun 2024
Tested : 07 Jun 2024
Diagnosed : 07 Jun 2024 - Wes Davis

GFL Environmental - 207 - Pickering SW
 1034 TOY AVENUE, PICKERING YARD
 PICKERING, ON
 CA L1W 3P1
 Contact: Ian Patton
 ipatton@gflenv.com
 T: (905)831-6297
 F: (905)426-3577

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.