


# OIL ANALYSIS REPORT

Area  
**TEAM 3**  
Machine Id  
**166195**  
Component  
**Hydraulic System**  
Fluid  
**PETRO CANADA HYDREX AW 46 (150 LTR)**

Sample Rating Trend

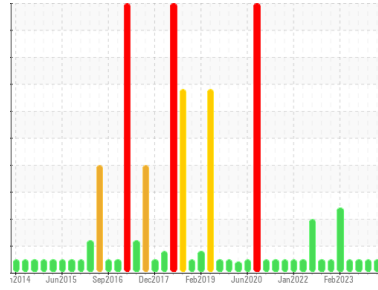

**NORMAL**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PC0078756</b>	PC0076969	PC0074802
Sample Date	Client Info			<b>25 May 2024</b>	14 Jan 2024	08 Aug 2023
Machine Age	mths	Client Info		<b>0</b>	0	0
Oil Age	mths	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.05	<b>NEG</b>	NEG	NEG





WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>30	<b>2</b>	0	<1
Chromium	ppm	ASTM D5185(m)	>2	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m)	>2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>2	<b>0</b>	<1	<1
Lead	ppm	ASTM D5185(m)	>10	<b>0</b>	0	0
Copper	ppm	ASTM D5185(m)	>25	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185(m)	>20	<b>0</b>	0	0
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	0	<b>0</b>	0	0
Barium	ppm	ASTM D5185(m)	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	0	<b>0</b>	0	0
Manganese	ppm	ASTM D5185(m)	0	<b>0</b>	0	0
Magnesium	ppm	ASTM D5185(m)	0	<b>&lt;1</b>	<1	<1
Calcium	ppm	ASTM D5185(m)	50	<b>48</b>	51	47
Phosphorus	ppm	ASTM D5185(m)	330	<b>330</b>	328	348
Zinc	ppm	ASTM D5185(m)	430	<b>415</b>	416	413
Sulfur	ppm	ASTM D5185(m)	760	<b>921</b>	764	738
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	<b>0</b>	0	0
Sodium	ppm	ASTM D5185(m)		<b>&lt;1</b>	0	<1
Potassium	ppm	ASTM D5185(m)	>20	<b>0</b>	<1	<1

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	<b>2647</b>	509	---
Particles >6µm		ASTM D7647	>1300	<b>718</b>	120	---
Particles >14µm		ASTM D7647	>160	<b>45</b>	17	---
Particles >21µm		ASTM D7647	>40	<b>10</b>	7	---
Particles >38µm		ASTM D7647	>10	<b>1</b>	2	---
Particles >71µm		ASTM D7647	>3	<b>0</b>	1	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<b>19/17/13</b>	16/14/11	---


# OIL ANALYSIS REPORT

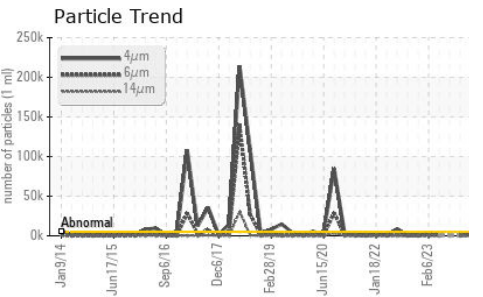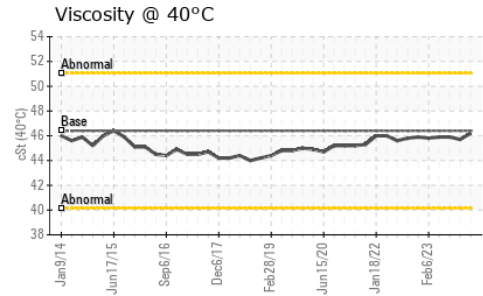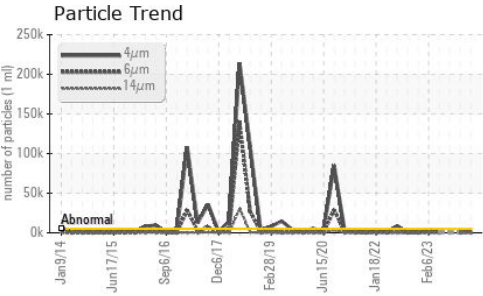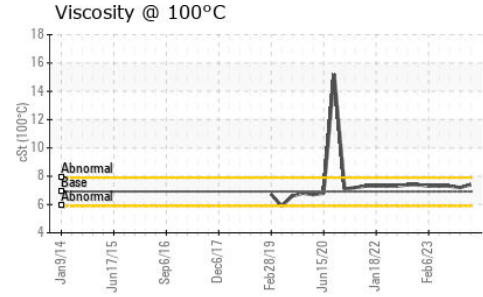





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.05	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D7279(m)	46.4	<b>46.2</b>	45.7	45.9
Visc @ 100°C	cSt	ASTM D7279(m)	6.92	<b>7.4</b>	7.2	7.3
Viscosity Index (VI)	Scale	ASTM D2270*	104	<b>123</b>	117	120

## SAMPLE IMAGES

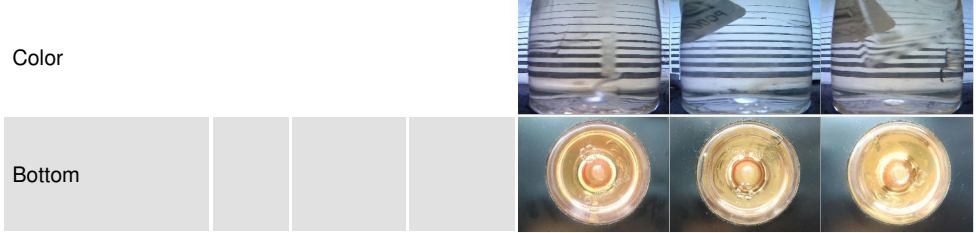

## GRAPHS

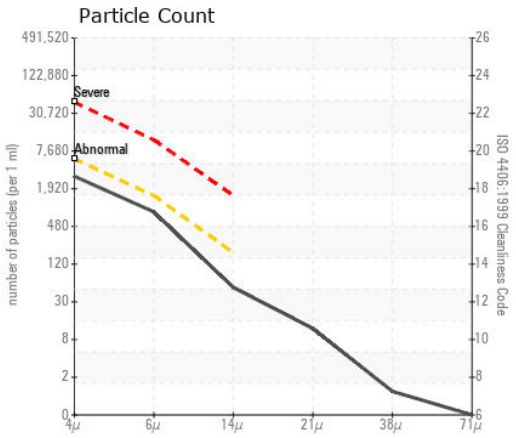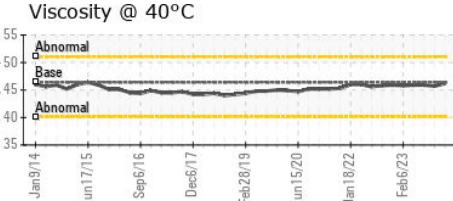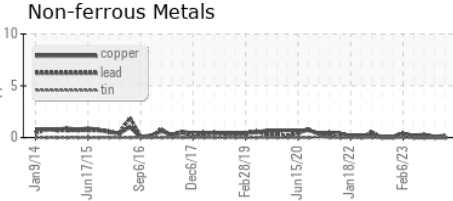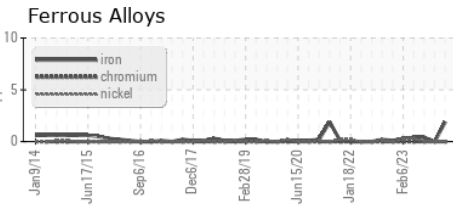

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0078756 **Received** : 07 Jun 2024  
**Lab Number** : **02640506** **Tested** : 07 Jun 2024  
**Unique Number** : 5789668 **Diagnosed** : 07 Jun 2024 - Wes Davis  
**Test Package** : MOB 2 ( Additional Tests: KV100, VI )

**Dryden Fibre**  
 Box 3001, 1 Duke Street  
 Dryden, ON  
 CA P8N 2Z7  
 Contact: Adebukola Adekanye  
 aadekanye@drydenfibre.ca  
 T: (807)223-9950  
 F: (807)223-9176

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.