


OIL ANALYSIS REPORT

Area
TEAM 3
Machine Id
166122
Component
Hydraulic System
Fluid
PETRO CANADA HYDREX AW 46 (10 GAL)

Sample Rating Trend

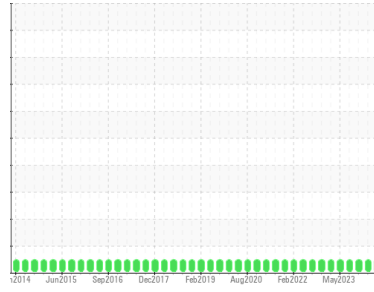

DIAGNOSIS

Recommendation
Resample at the next service interval to monitor.

Wear
All component wear rates are normal.

Contamination
The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition
The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | PC0078754 | PC0076963 | PC0069856 |
| Sample Date | Client Info | | 28 May 2024 | 14 Jan 2024 | 20 Oct 2023 |
| Machine Age | mths | Client Info | 0 | 0 | 0 |
| Oil Age | mths | Client Info | 0 | 0 | 0 |
| Oil Changed | Client Info | | N/A | N/A | N/A |
| Sample Status | | | NORMAL | NORMAL | NORMAL |

CONTAMINATION

| | method | limit/base | current | history1 | history2 |
|-------|-----------|------------|------------|----------|----------|
| Water | WC Method | >0.05 | NEG | NEG | NEG |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|-------------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185(m) >20 | 4 | 4 | 4 |
| Chromium | ppm | ASTM D5185(m) >20 | <1 | <1 | <1 |
| Nickel | ppm | ASTM D5185(m) >20 | 0 | <1 | 0 |
| Titanium | ppm | ASTM D5185(m) | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185(m) | 0 | 0 | <1 |
| Aluminum | ppm | ASTM D5185(m) >20 | 0 | <1 | 0 |
| Lead | ppm | ASTM D5185(m) >20 | 0 | <1 | <1 |
| Copper | ppm | ASTM D5185(m) >20 | 3 | 3 | 3 |
| Tin | ppm | ASTM D5185(m) >20 | 0 | 0 | 0 |
| Antimony | ppm | ASTM D5185(m) | 0 | 0 | 0 |
| Vanadium | ppm | ASTM D5185(m) | 0 | 0 | 0 |
| Beryllium | ppm | ASTM D5185(m) | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185(m) | 0 | 0 | 0 |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|--------|-------------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185(m) 0 | <1 | 0 | <1 |
| Barium | ppm | ASTM D5185(m) 0 | 0 | 0 | <1 |
| Molybdenum | ppm | ASTM D5185(m) 0 | 0 | 0 | 0 |
| Manganese | ppm | ASTM D5185(m) 0 | 0 | 0 | 0 |
| Magnesium | ppm | ASTM D5185(m) 0 | 8 | 9 | 8 |
| Calcium | ppm | ASTM D5185(m) 50 | 30 | 30 | 30 |
| Phosphorus | ppm | ASTM D5185(m) 330 | 316 | 317 | 313 |
| Zinc | ppm | ASTM D5185(m) 430 | 379 | 375 | 383 |
| Sulfur | ppm | ASTM D5185(m) 760 | 1648 | 1804 | 1688 |
| Lithium | ppm | ASTM D5185(m) | <1 | <1 | <1 |





CONTAMINANTS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|-------------------|--------------|----------|----------|
| Silicon | ppm | ASTM D5185(m) >15 | <1 | 1 | 1 |
| Sodium | ppm | ASTM D5185(m) | 6 | 6 | 7 |
| Potassium | ppm | ASTM D5185(m) >20 | 1 | 1 | 0 |

FLUID CLEANLINESS

| | method | limit/base | current | history1 | history2 |
|-----------------|--------------|------------|-----------------|----------|----------|
| Particles >4µm | ASTM D7647 | | 2624 | 767 | 235 |
| Particles >6µm | ASTM D7647 | >1300 | 575 | 209 | 83 |
| Particles >14µm | ASTM D7647 | >160 | 34 | 15 | 9 |
| Particles >21µm | ASTM D7647 | >40 | 12 | 6 | 3 |
| Particles >38µm | ASTM D7647 | >10 | 3 | 1 | 1 |
| Particles >71µm | ASTM D7647 | >3 | 1 | 1 | 0 |
| Oil Cleanliness | ISO 4406 (c) | >--/17/14 | 19/16/12 | 17/15/11 | 15/14/10 |


OIL ANALYSIS REPORT

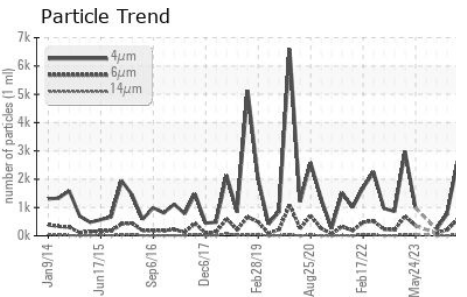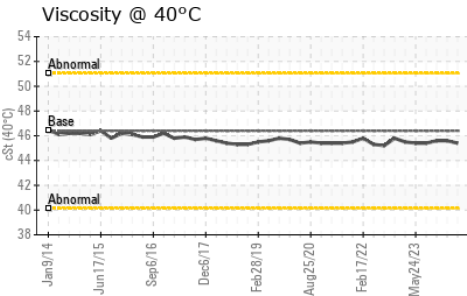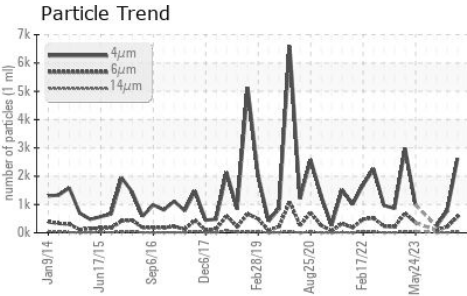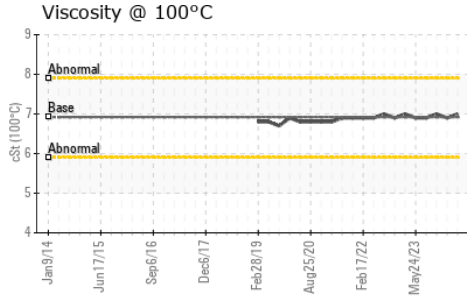





| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | Visual* | NONE | NONE | NONE |
| Yellow Metal | scalar | Visual* | NONE | NONE | NONE |
| Precipitate | scalar | Visual* | NONE | NONE | NONE |
| Silt | scalar | Visual* | NONE | NONE | NONE |
| Debris | scalar | Visual* | NONE | NONE | NONE |
| Sand/Dirt | scalar | Visual* | NONE | NONE | NONE |
| Appearance | scalar | Visual* | NORML | NORML | NORML |
| Odor | scalar | Visual* | NORML | NORML | NORML |
| Emulsified Water | scalar | Visual* | >0.05 | NEG | NEG |
| Free Water | scalar | Visual* | | NEG | NEG |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|----------------------|--------|---------------|---------|----------|----------|
| Visc @ 40°C | cSt | ASTM D7279(m) | 46.4 | 45.6 | 45.6 |
| Visc @ 100°C | cSt | ASTM D7279(m) | 6.92 | 7.0 | 7 |
| Viscosity Index (VI) | Scale | ASTM D2270* | 104 | 111 | 110 |

SAMPLE IMAGES

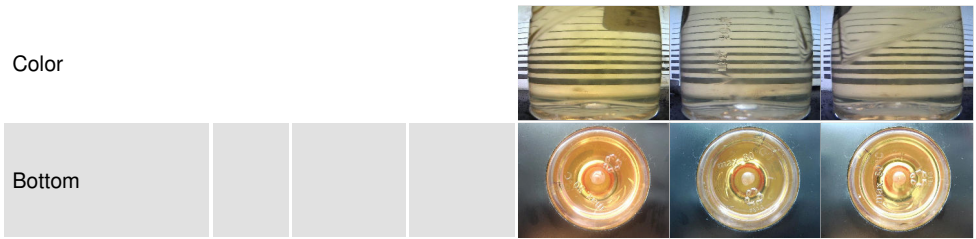

GRAPHS

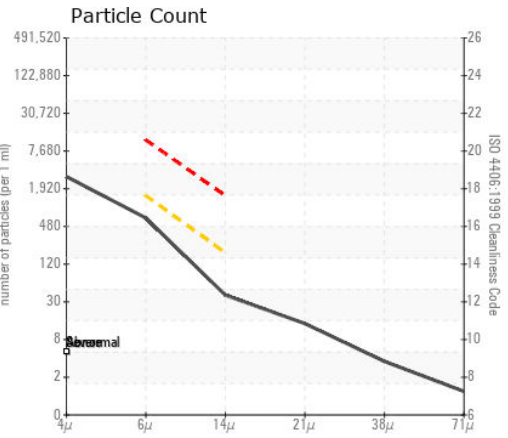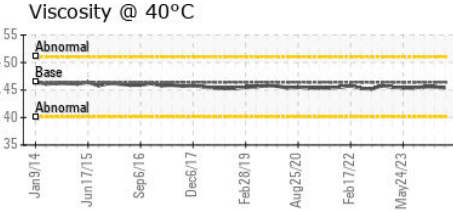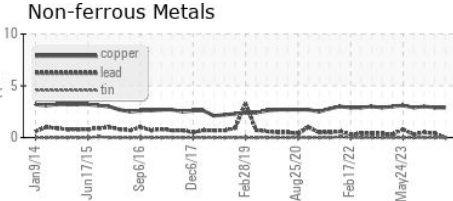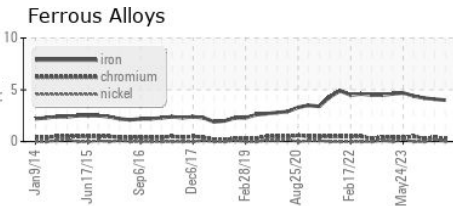

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0078754 **Received** : 07 Jun 2024
Lab Number : 02640509 **Tested** : 07 Jun 2024
Unique Number : 5789671 **Diagnosed** : 07 Jun 2024 - Wes Davis
Test Package : MOB 2 (Additional Tests: KV100, VI)

Dryden Fibre
 Box 3001, 1 Duke Street
 Dryden, ON
 CA P8N 2Z7
 Contact: Adebukola Adekanye
 aadekanye@drydenfibre.ca
 T: (807)223-9950
 F: (807)223-9176

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.