

Machine Id
FREIGHTLINER 15-01
Component
Hydraulic System
Fluid
PETRO CANADA ENVIRON MV R 46 (--- GAL)

DIAGNOSIS

Recommendation

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition. À NOTER: S.V.P. inclure, avec le prochain échantillon, des détails de la capacité du réservoir et le type et le degré de filtration. Veuillez noter qu'il s'agit d'une copie corrigée pour les mises à jour de saisie de données. (Customer Sample Comment: 3rd new batch)

Wear

Les taux d'usure de tous les composants sont normaux.

Contamination

La propreté du système est acceptable pour votre objectif de propreté ISO 4406. La propreté du système et du fluide est acceptable.

Fluid Condition

Le AN est acceptable pour ce fluide. L'état de l'huile permet d'en prolonger l'utilisation.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PC0087950	PC0087983	PC0087974
Sample Date	Client Info			07 Jun 2024	17 Apr 2024	17 Apr 2024
Machine Age	hrs	Client Info		8034	8034	8034
Oil Age	hrs	Client Info		8034	2	0
Oil Changed	Client Info			N/A	Changed	Not Changd
Sample Status				NORMAL	NORMAL	ABNORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.05	NEG	NEG	NEG






WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	0	<1	4
Chromium	ppm	ASTM D5185(m)	>20	0	0	0
Nickel	ppm	ASTM D5185(m)	>20	0	0	0
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		0	0	0
Aluminum	ppm	ASTM D5185(m)	>20	0	0	<1
Lead	ppm	ASTM D5185(m)	>20	0	0	0
Copper	ppm	ASTM D5185(m)	>20	0	3	15
Tin	ppm	ASTM D5185(m)	>20	0	0	0
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	<1	<1	<1	<1
Barium	ppm	ASTM D5185(m)	<1	0	<1	1
Molybdenum	ppm	ASTM D5185(m)	<1	0	0	0
Manganese	ppm	ASTM D5185(m)	<1	0	0	0
Magnesium	ppm	ASTM D5185(m)	<1	0	2	12
Calcium	ppm	ASTM D5185(m)		0	10	48
Phosphorus	ppm	ASTM D5185(m)	626	584	550	301
Zinc	ppm	ASTM D5185(m)		<1	60	320
Sulfur	ppm	ASTM D5185(m)	1236	1293	1226	885
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	0	0	1
Sodium	ppm	ASTM D5185(m)		0	0	0
Potassium	ppm	ASTM D5185(m)	>20	<1	0	0

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	3170	4501	● 5536
Particles >6µm		ASTM D7647	>1300	884	124	226
Particles >14µm		ASTM D7647	>160	46	13	15
Particles >21µm		ASTM D7647	>40	10	4	5
Particles >38µm		ASTM D7647	>10	0	1	1
Particles >71µm		ASTM D7647	>3	0	1	1
Oil Cleanliness		ISO 4406 (c)	>19/17/14	19/17/13	19/14/11	● 20/15/11

OIL ANALYSIS REPORT

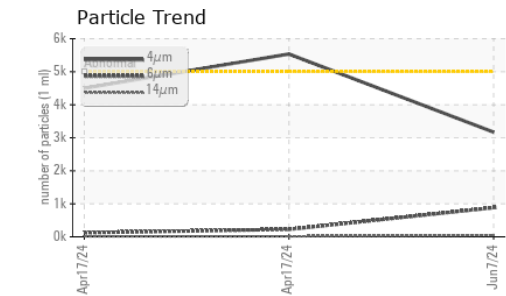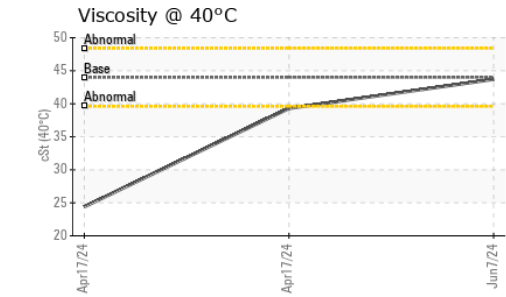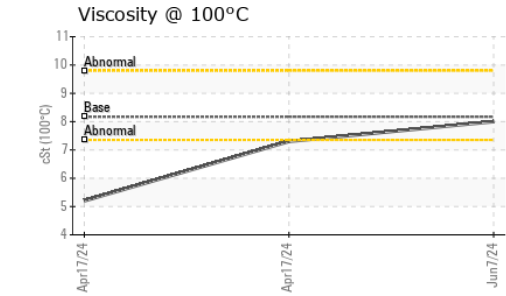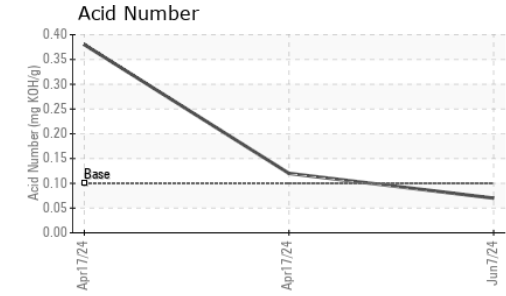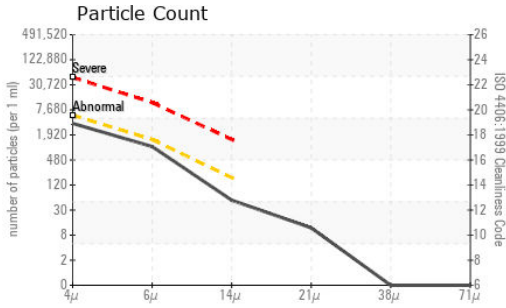


FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.1	0.07	0.12	0.38

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	HAZY	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.05	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	43.99	43.7	39.3	▲ 24.4
Visc @ 100°C	cSt	ASTM D7279(m)	8.17	8.0	7.3	▲ 5.2
Viscosity Index (VI)	Scale	ASTM D2270*	162	157	152	150

SAMPLE IMAGES

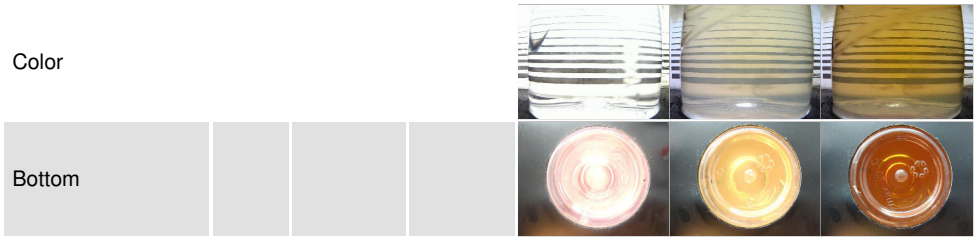

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0087950 **Received** : 10 Jun 2024
Lab Number : **02640783** **Tested** : 14 Jun 2024
Unique Number : 5789945 **Diagnosed** : 14 Jun 2024 - Kevin Marson
Test Package : IND 2 (Additional Tests: KV100, VI)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

Sema
 125 Rue de l'Expansion
 Sainte-Flavie, QC
 CA G0J 2L0
 Contact: Vincent Gagne
 vincent.gagne@sema.ca
 T: (866)775-7141
 F: