


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

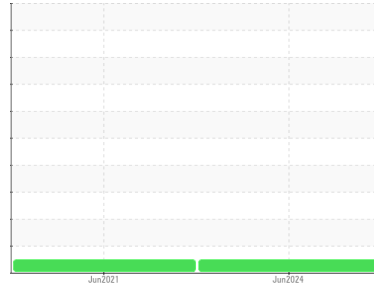

Machine Id
SP-01-0155-HYD HPU KICKER SORTIE 17
Component
Hydraulic System
Fluid
PETRO CANADA HYDREX XV ALL SEASON HYDRAULIC OIL (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using MOB 2 test kits, this testkit includes Particle Count to determine the ISO cleanliness of the fluid.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the component(unconfirmed).

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PC0088486	PC0036913	---
Sample Date	Client Info		06 Jun 2024	20 Jun 2021	---
Machine Age	yrs	Client Info	9	7	---
Oil Age	yrs	Client Info	6	2	---
Oil Changed	Client Info		N/A	Not Changd	---
Sample Status			NORMAL	NORMAL	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184*		4	---	---
Iron	ppm	ASTM D5185(m) >20	22	14	---
Chromium	ppm	ASTM D5185(m) >10	0	0	---
Nickel	ppm	ASTM D5185(m) >10	0	<1	---
Titanium	ppm	ASTM D5185(m)	0	0	---
Silver	ppm	ASTM D5185(m)	0	0	---
Aluminum	ppm	ASTM D5185(m) >10	0	0	---
Lead	ppm	ASTM D5185(m) >10	0	0	---
Copper	ppm	ASTM D5185(m) >75	<1	<1	---
Tin	ppm	ASTM D5185(m) >10	0	0	---
Antimony	ppm	ASTM D5185(m)	0	0	---
Vanadium	ppm	ASTM D5185(m)	0	0	---
Beryllium	ppm	ASTM D5185(m)	0	0	---
Cadmium	ppm	ASTM D5185(m)	0	0	---




ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 0	4	4	---
Barium	ppm	ASTM D5185(m) 0	0	0	---
Molybdenum	ppm	ASTM D5185(m) 0	2	3	---
Manganese	ppm	ASTM D5185(m) 1	<1	<1	---
Magnesium	ppm	ASTM D5185(m) 0	39	38	---
Calcium	ppm	ASTM D5185(m) 100	164	164	---
Phosphorus	ppm	ASTM D5185(m) 670	619	676	---
Zinc	ppm	ASTM D5185(m) 850	779	826	---
Sulfur	ppm	ASTM D5185(m) 1600	1584	1620	---
Lithium	ppm	ASTM D5185(m)	<1	<1	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >20	0	<1	---
Sodium	ppm	ASTM D5185(m)	<1	0	---
Potassium	ppm	ASTM D5185(m) >20	<1	<1	---


OIL ANALYSIS REPORT

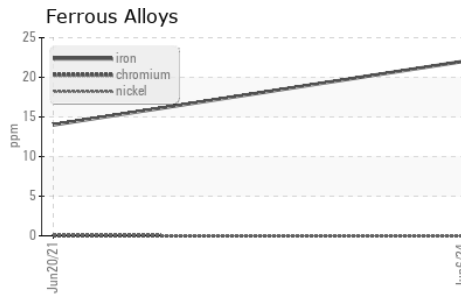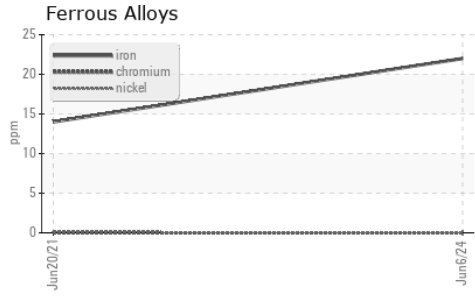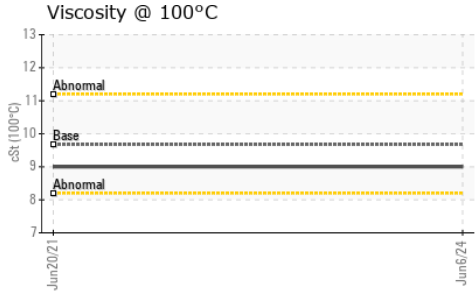









VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	47.9	47.0	---
Visc @ 100°C	cSt	ASTM D7279(m)	9.67	9.0	---
Viscosity Index (VI)	Scale	ASTM D2270*	192	175	---

SAMPLE IMAGES

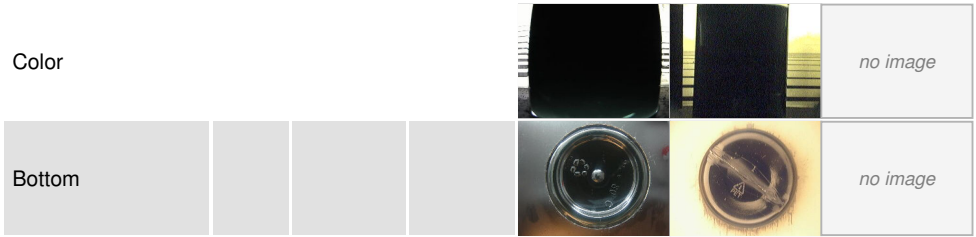

GRAPHS



Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0088486 **Received** : 10 Jun 2024
Lab Number : **02640804** **Tested** : 10 Jun 2024
Unique Number : 5789966 **Diagnosed** : 11 Jun 2024 - Kevin Marson
Test Package : MOB 1 (Additional Tests: KV100, PQ, VI)

DAAQUAM
 43 RANG 6
 ST-PAMPHILE, QC
 CA 60R 3X0

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

Contact: Pierre-Olivier Leblanc
 pierre-olivier.leblanc@daaquam.com
 T: (418)356-7693
 F: x: