



Machine Id  
**TOTE #1 HYDREX AW 32**  
Component  
**New (Unused) Oil**  
Fluid  
**PETRO CANADA HYDREX AW 32 (--- GAL)**



## DIAGNOSIS

### Recommendation

Il s'agit du relevé de base de cette huile neuve (inutilisée). Le fluide peut servir. Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition. **NOTER:** Des nouvelles huiles ne sont pas généralement filtrées ni garanties conformes à un code spécifique de propreté. Nous vous conseillons de vérifier le code cible de propreté pour votre application et vous recommandons de vous servir d'un dispositif portable de filtrage lors du remplissage de tout système avec un code de propreté inférieur au code de propreté ISO de ce produit.

### Contamination

Il y a une légère quantité de limon (particules de 4 à 14 microns) dans l'huile.

### Fluid Condition

Le AN est acceptable pour ce fluide. L'état de l'huile permet d'en l'utilisation.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PC0079807</b>	---	---
Sample Date	Client Info	<b>12 Jun 2024</b>	---	---
Machine Age	hrs Client Info	<b>0</b>	---	---
Oil Age	hrs Client Info	<b>0</b>	---	---
Oil Changed	Client Info	<b>N/A</b>	---	---
Sample Status		<b>ATTENTION</b>	---	---

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method	<b>NEG</b>	---	---

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185(m)	<b>0</b>	---	---
Chromium	ppm ASTM D5185(m)	<b>0</b>	---	---
Nickel	ppm ASTM D5185(m)	<b>0</b>	---	---
Titanium	ppm ASTM D5185(m)	<b>0</b>	---	---
Silver	ppm ASTM D5185(m)	<b>0</b>	---	---
Aluminum	ppm ASTM D5185(m)	<b>0</b>	---	---
Lead	ppm ASTM D5185(m)	<b>0</b>	---	---
Copper	ppm ASTM D5185(m)	<b>0</b>	---	---
Tin	ppm ASTM D5185(m)	<b>0</b>	---	---
Antimony	ppm ASTM D5185(m)	<b>0</b>	---	---
Vanadium	ppm ASTM D5185(m)	<b>0</b>	---	---
Beryllium	ppm ASTM D5185(m)	<b>0</b>	---	---
Cadmium	ppm ASTM D5185(m)	<b>0</b>	---	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m)	<b>0</b>	---	---
Barium	ppm ASTM D5185(m)	<b>0</b>	---	---
Molybdenum	ppm ASTM D5185(m)	<b>0</b>	---	---
Manganese	ppm ASTM D5185(m)	<b>0</b>	---	---
Magnesium	ppm ASTM D5185(m)	<b>&lt;1</b>	---	---
Calcium	ppm ASTM D5185(m)	<b>52</b>	---	---
Phosphorus	ppm ASTM D5185(m)	<b>335</b>	---	---
Zinc	ppm ASTM D5185(m)	<b>433</b>	---	---
Sulfur	ppm ASTM D5185(m)	<b>736</b>	---	---
Lithium	ppm ASTM D5185(m)	<b>&lt;1</b>	---	---






## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m)	<b>0</b>	---	---
Sodium	ppm ASTM D5185(m)	<b>0</b>	---	---
Potassium	ppm ASTM D5185(m)	<b>0</b>	---	---

## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% ASTM D7844*	<b>0</b>	---	---
Nitration	Abs/cm ASTM D7624*	<b>1.5</b>	---	---
Sulfation	Abs/1mm ASTM D7415*	<b>11.2</b>	---	---

# OIL ANALYSIS REPORT

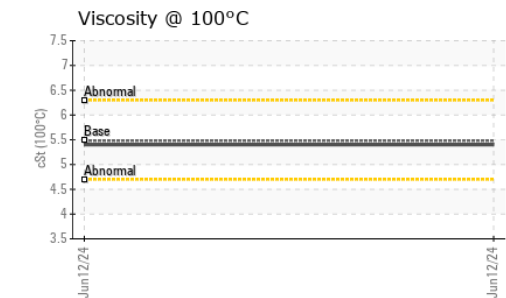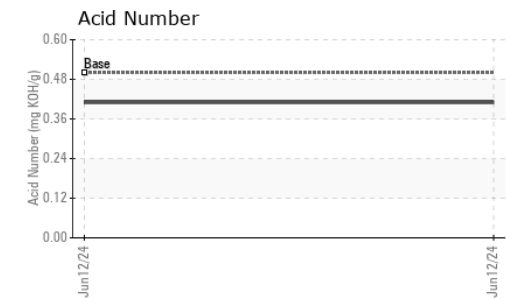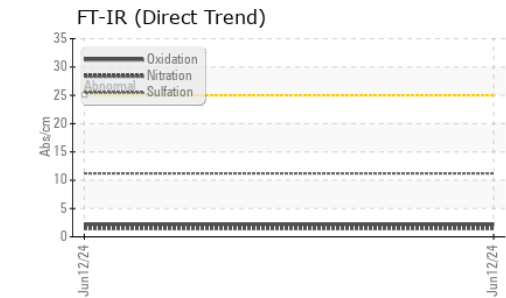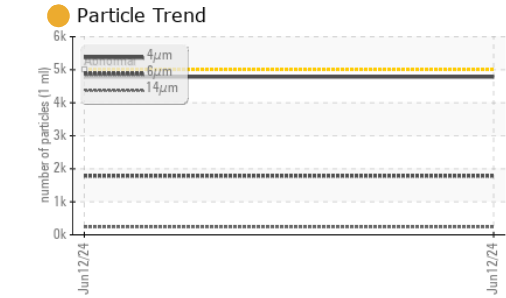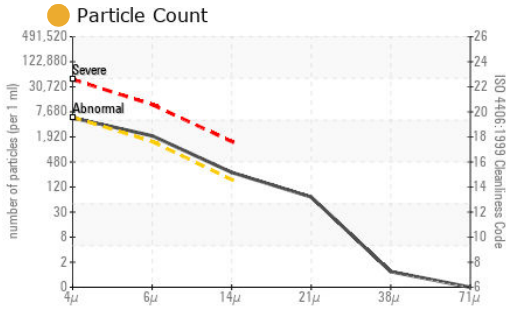

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0079807  
**Lab Number** : 02641765  
**Unique Number** : 5799304  
**Test Package** : MOB 2 ( Additional Tests: FT-IR, ICP-NewOil, KV100, PrtCount, VI )

**Received** : 13 Jun 2024  
**Tested** : 14 Jun 2024  
**Diagnosed** : 14 Jun 2024 - Kevin Marson

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

**Petro Lub**  
 10390 Louis H. Lafontaine  
 Anjou, QC  
 CA H1J 2T3  
 Contact: Shayne Eteson  
 sheteson@petrolub.ca  
 T: (514)920-0326  
 F: (514)920-0853

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	<b>4782</b>	---	---
Particles >6µm	ASTM D7647	>1300	<b>1786</b>	---	---
Particles >14µm	ASTM D7647	>160	<b>237</b>	---	---
Particles >21µm	ASTM D7647	>40	<b>61</b>	---	---
Particles >38µm	ASTM D7647	>10	<b>1</b>	---	---
Particles >71µm	ASTM D7647	>3	<b>0</b>	---	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<b>19/18/15</b>	---	---

FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414*	<b>2.2</b>	---	---
Acid Number (AN)	mg KOH/g	ASTM D974*	<b>0.41</b>	---	---

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	<b>NONE</b>	---	---
Yellow Metal	scalar	Visual*	<b>NONE</b>	---	---
Precipitate	scalar	Visual*	<b>NONE</b>	---	---
Silt	scalar	Visual*	<b>NONE</b>	---	---
Debris	scalar	Visual*	<b>NONE</b>	---	---
Sand/Dirt	scalar	Visual*	<b>NONE</b>	---	---
Appearance	scalar	Visual*	<b>NORML</b>	---	---
Odor	scalar	Visual*	<b>NORML</b>	---	---
Emulsified Water	scalar	Visual*	<b>NEG</b>	---	---
Free Water	scalar	Visual*	<b>NEG</b>	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	<b>31.7</b>	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	<b>5.4</b>	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	<b>104</b>	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image