


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

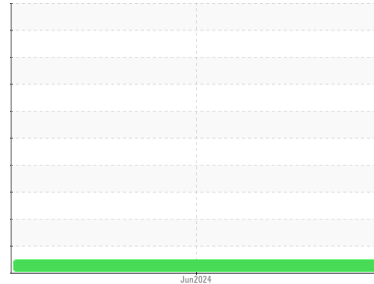

Machine Id
TOTE #6 HYDREX AW 32 BLK
Component
New (Unused) Oil
Fluid
PETRO CANADA HYDREX AW 32 (--- GAL)

DIAGNOSIS

Recommendation

Il s'agit du relevé de base de cette huile neuve (inutilisée). Le fluide peut servir.

Contamination

La propreté du système est acceptable pour votre objectif de propreté ISO 4406. Il n'y a aucun indice de contamination dans le huile (inutilisée) neuve.

Fluid Condition

Le AN est acceptable pour ce fluide. L'état de l'huile permet d'en l'utilisation.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PC0079811	---	---
Sample Date	Client Info			12 Jun 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Oil Changed	Client Info			N/A	---	---
Sample Status				NORMAL	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method			NEG	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)		0	---	---
Chromium	ppm	ASTM D5185(m)		0	---	---
Nickel	ppm	ASTM D5185(m)		0	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)		0	---	---
Lead	ppm	ASTM D5185(m)		0	---	---
Copper	ppm	ASTM D5185(m)		0	---	---
Tin	ppm	ASTM D5185(m)		0	---	---
Antimony	ppm	ASTM D5185(m)		0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
Beryllium	ppm	ASTM D5185(m)		0	---	---
Cadmium	ppm	ASTM D5185(m)		0	---	---


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	0	0	---	---
Barium	ppm	ASTM D5185(m)	0	0	---	---
Molybdenum	ppm	ASTM D5185(m)	0	0	---	---
Manganese	ppm	ASTM D5185(m)	0	0	---	---
Magnesium	ppm	ASTM D5185(m)	0	<1	---	---
Calcium	ppm	ASTM D5185(m)	50	51	---	---
Phosphorus	ppm	ASTM D5185(m)	330	335	---	---
Zinc	ppm	ASTM D5185(m)	430	431	---	---
Sulfur	ppm	ASTM D5185(m)	760	732	---	---
Lithium	ppm	ASTM D5185(m)		<1	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)		0	---	---
Sodium	ppm	ASTM D5185(m)		0	---	---
Potassium	ppm	ASTM D5185(m)	>20	0	---	---


INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*		0	---	---
Nitration	Abs/cm	ASTM D7624*		1.5	---	---
Sulfation	Abs/.1mm	ASTM D7415*		11.2	---	---

OIL ANALYSIS REPORT


FT-IR (Direct Trend)

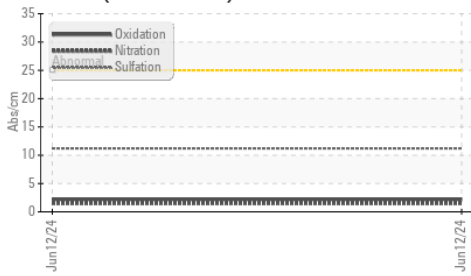


Particle Count

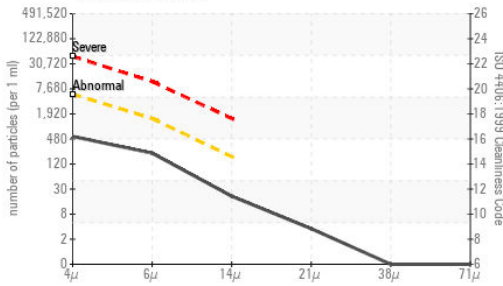


Acid Number

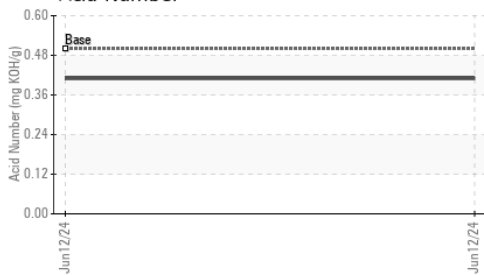

Viscosity @ 100°C

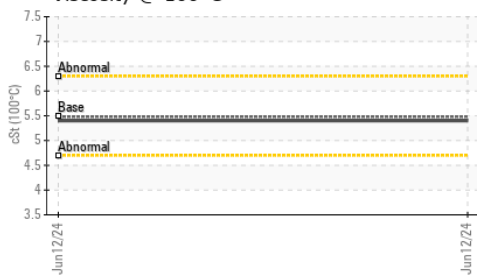

Viscosity @ 40°C

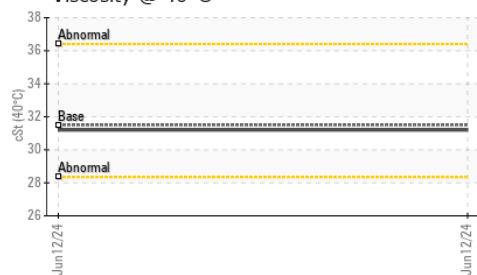

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	485	---	---	
Particles >6µm	ASTM D7647	>1300	193	---	---	
Particles >14µm	ASTM D7647	>160	18	---	---	
Particles >21µm	ASTM D7647	>40	3	---	---	
Particles >38µm	ASTM D7647	>10	0	---	---	
Particles >71µm	ASTM D7647	>3	0	---	---	
Oil Cleanliness	ISO 4406 (c)	>19/17/14	16/15/11	---	---	

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414*		2.2	---	---
Acid Number (AN)	mg KOH/g	ASTM D974*	0.50	0.41	---	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Precipitate	scalar	Visual*	NONE	NONE	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*		NEG	---	---
Free Water	scalar	Visual*		NEG	---	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	31.5	31.2	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	5.48	5.4	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	110	107	---	---

SAMPLE IMAGES		method	limit/base	current	history1	history2
Color					no image	no image
Bottom					no image	no image



Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0079811 **Received** : 13 Jun 2024
Lab Number : **02641767** **Tested** : 14 Jun 2024
Unique Number : 5799306 **Diagnosed** : 14 Jun 2024 - Kevin Marson
Test Package : MOB 2 (Additional Tests: FT-IR, ICP-NewOil, KV100, PrtCount, VI)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

Petro Lub
 10390 Louis H. Lafontaine
 Anjou, QC
 CA H1J 2T3
 Contact: Shayne Eteson
 sheteson@petrolub.ca
 T: (514)920-0326
 F: (514)920-0853